

INSTITUTE OF AERONAUTICAL ENGINEERING



(Autonomous)
Dundigal, Hyderabad - 500 043

**Course : ENGINEERING MECHANICS
(AMEB03)**

Prepared by:

Mr.G.Venkateswarlu

Assistant Professor

Subject

- Graduates:
 - Midterm exam 30%
 - Final exam 70%
- Course Materials
 - Lecture notes
 - Power points slides
 - Class notes
 - Textbooks
 - Engineering Mechanics: Statics 10th edition by R.C. Hibbeler



COURSE OBJECTIVES

The course should enable the students to:

- I. Develop the ability to work comfortably with basic engineering mechanics concepts required for analysing static structures.
- II. Identify an appropriate structural system to studying a given problem and isolate it from its environment, model the problem using good free body diagrams and accurate equilibrium equations.
- III. Identify and model various types of loading and support conditions that act on structural systems, apply pertinent mathematical, physical and engineering mechanical principles to the system to solve and analyze the problem.
- IV. Solve the problem of equilibrium by using the principle of work and energy in mechanical design and structural analysis.
- V. Apply the concepts of vibrations to the problems associated with dynamic behavior.



COURSE OUTCOMES

After completing this course the student must demonstrate the knowledge and ability to:

1. **Classifying** different types of motions in kinematics.
2. **Categorizing** the bodies in kinetics as a particle, rigidbody in translation and rotation.
3. **Choosing principle** of impulse momentum and virtualwork for equilibrium of ideal systems, stable and unstable equilibriums
4. **Appraising** work and energy method for particlemotion and plane motion.
5. **Apply** the concepts of vibrations.

Course Outline

KINEMATICS

**KINETICS
NEWTON'S LAW**

**KINETICS
ENERGY & MOMENTUM**

PARTICLE

Chapter 1

Chapter 2

Chapter 3

**SYSTEM OF
PARTICLES**

Chapter 4

RIGID BODIES

Chapter 3

Chapter 4

Chapter 5



Introduction to Mechanics



What is mechanics?




Physical science deals with the state of rest or motion of bodies under the action of force



Why we study mechanics?



This science forms the groundwork for further study in the design and analysis of structures

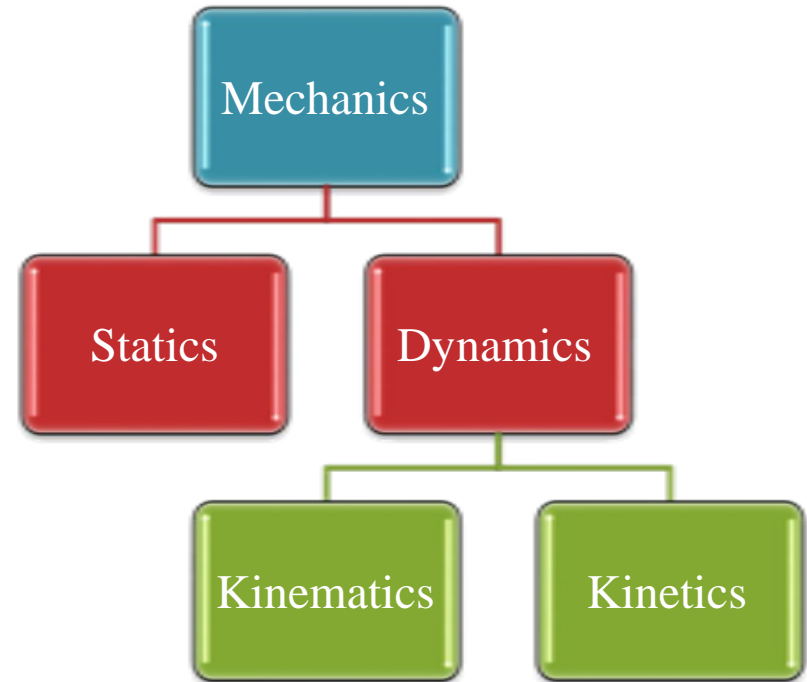

Basic Terms

- Essential basic terms to be understood
 - **Statics:** dealing with the equilibrium of a rigid-body at rest
 - **Rigid body:** the relative movement between its parts are negligible
 - **Dynamics:** dealing with a rigid-body in motion
 - **Length:** applied to the linear dimension of a straight line or curved line
 - **Area:** the two dimensional size of shape or surface
 - **Volume:** the three dimensional size of the space occupied by substance
 - **Force:** the action of one body on another whether it's a push or a pullforce
 - **Mass:** the amount of matter in a body
 - **Weight:** the force with which a body is attracted toward the centre of theEarth
 - **Particle:** a body of negligible dimension

Units of Measurement

- Four fundamental quantities in mechanics
 - Mass
 - Length
 - Time
 - Force
- Two different systems of units we dealing with during the course
 - _____ Units (CGS)
 - Length in centimeter(cm)
 - Time in Seconds (s)
 - Force in kilograms (kg)
 - International System of Units or Metric Units (SI)
 - Length in metre (m)
 - Time in Seconds (s)
 - Force in Newton (N)

Units of Measurement

- Summary of the four fundamental quantities in the two systems




Quantity	SI Units		US Units	
	Unit	Symbol	Unit	Symbol
Mass	kilogram	kg	slug	-
Length	meter	m	foot	ft
Time	second	s	second	sec
Force	newton	N	pound	lb

Units of Measurement

- Metric System (SI)
 - SI System offers major advantages relative to the FPS system
 - Widely used throughout the world
 - Use one basic unit for length meter; while FPS uses many basic units inch, foot, yard, mile
 - SI based on multiples of 10, which makes it easier to use & learn whereas FPS is complicated, for example
 - SI system 1 meter = 100 centimeters, 1 kilometer = 1000 meters, etc
 - FPS system 1 foot = 12 inches, 1 yard = 3 feet, 1 mile = 5280 feet, etc
- Metric System (SI)
 - Newton's second law $F = m.a$
 - Thus the force (N) = mass (kg) \times acceleration (m/s^2)
 - Therefore 1 Newton is the force required to give a mass of 1 kg an acceleration of $1 m/s^2$

Units of Measurement

- U.S. Customary System (FPS)
 - Force (lb) = mass (slugs) \times acceleration (ft/sec²)
 - Thus (slugs) = lb.sec²/ft
 - Therefore 1 slug is the mass which is given an acceleration of 1 ft/sec² when acted upon by a force of 1 lb
- Conversion of Units
 - Converting from one system of unit to another;

Quantity	FPS	Equals	SI
Force	1 lb		4.448 N
Mass	1 slug		14.593 kg
Length	1 ft		0.304 m

- The standard value of g (gravitational acceleration)
 - SI units $g = 9.806 \text{ m/s}^2$
 - FPS units $g = 32.174 \text{ ft/sec}^2$



Objectives

To provide an introduction of:

- ✧ Fundamental concepts,
- ✧ General principles,
- ✧ Analysis methods,
- ✧ Future Studies

in Engineering Mechanics.



Outline

- 1. Engineering Mechanics
- 2. Fundamental Concepts
- 3. General Principles
- 4. Static Analysis
- 5. Dynamic Analysis
- 6. Future Studies



I. Engineering Mechanics

- Mechanics:
 - Rigid-body Mechanics
 - Deformable-body Mechanics - Fluid Mechanics
- Rigid-body Mechanics:
 - Statics
 - Dynamics



1. Engineering Mechanics

- **Statics** –Equilibrium Analysis
of particles and bodies
- **Dynamics** –Accelerated motion
of particles and bodies
Kinematics and **Kinetics**
- Mechanics of Materials...
- Theory of Vibration...

2. Fundamentals Concepts

Basic Quantities

- Length, Mass, Time, Force

Units of Measurement

- m, kg, s, N... (SI, Int. System of Units)
- Dimensional Homogeneity
- Significant Figures



2. Fundamentals Concepts

Idealizations

- Particles
 - Consider mass but neglect size
- Rigid Body
 - Neglect material properties
- Concentrated Force
- Supports and Reactions

3. General Principles

- Newton's Laws of Motion
 - First Law, Second Law, Third Law
 - Law of Gravitational Attraction
- D'Alembert Principle : $F + (-ma) = 0$
- Impulse and Momentum
- Work and Energy
- Principle of Virtual Work (Equilibrium)



4. Static Analysis

- Force and Equilibrium
- Force System Resultants
- Structural Analysis
- Internal forces
- Friction
- Centroid and Moments of Inertia
- Virtual Work and Stability



5. Dynamic Analysis

- Kinematics of a Particle
- Kinetics: Force and Acceleration
- Work and Energy
- Impulse and Momentum (Impact)
- Planar Kinematics and Kinetics
- 3-D Kinematics and Kinetics
- Vibrations

UNIT-I

° KINEMATICS OF PARTICLES IN RECTILINEAR MOTION

Motion of a particle, rectilinear motion, motion curves, rectangular components of curvilinear motion, kinematics of rigid body, types of rigid body motion, angular motion, fixed axis rotation.



INTRODUCTION TO DYNAMICS

- Galileo and Newton (Galileo's experiments led to Newton's laws)
- Kinematics – study of motion
- Kinetics – the study of what causes changes in motion
- Dynamics is composed of kinematics and kinetics

Introduction

- Dynamics includes:
 - ***Kinematics***: study of the motion (displacement, velocity, acceleration, & time) without reference to the cause of motion (i.e. *regardless of forces*).
 - ***Kinetics***: study of the forces acting on a body, and the resulting motion caused by the given forces.
- ***Rectilinear*** motion: position, velocity, and acceleration of a particle as it moves along a **straight line**.
- ***Curvilinear*** motion: position, velocity, and acceleration of a particle as it moves along a **curved line**.

RECTILINEAR MOTION OF PARTICLES

Rectilinear Motion: Position, Velocity & Acceleration



MECHANICS
Kinematics of Particles
Motion in One Dimension

Acceleration


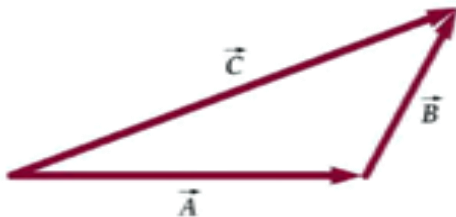

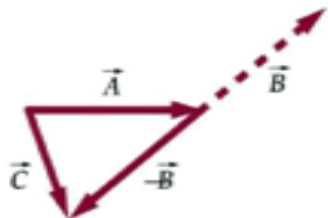



"It goes from zero to 60 in about 3 seconds."

© Sydney Harris

Summary of properties of vectors

Properties of Vectors

Property	Explanation	Figure	Component representation
Equality	$\vec{A} = \vec{B}$ if $ \vec{A} = \vec{B} $ and their directions are the same		$A_x = B_x$ $A_y = B_y$ $A_z = B_z$
Addition	$\vec{C} = \vec{A} + \vec{B}$		$C_x = A_x + B_x$ $C_y = A_y + B_y$ $C_z = A_z + B_z$
Negative of a vector	$\vec{A} = -\vec{B}$ if $ \vec{B} = \vec{A} $ and their directions are opposite		$A_x = -B_x$ $A_y = -B_y$ $A_z = -B_z$
Subtraction	$\vec{C} = \vec{A} - \vec{B}$		$C_x = A_x - B_x$ $C_y = A_y - B_y$ $C_z = A_z - B_z$
Multiplication by a scalar	$\vec{B} = s\vec{A}$ has magnitude $ \vec{B} = s \vec{A} $ and has the same direction as \vec{A} if s is positive or $-\vec{A}$ if s is negative		$B_x = sA_x$ $B_y = sA_y$ $B_z = sA_z$

POSITION, VELOCITY, AND ACCELERATION

For linear motion x marks the position of an object.
Position units would be m, ft, etc.

Average velocity is

$$v = \frac{\Delta x}{\Delta t}$$

Velocity units would be in m/s, ft/s, etc.
The instantaneous velocity is

$$v = \lim_{\Delta t \rightarrow 0} \frac{\Delta x}{\Delta t} = \frac{dx}{dt}$$

The average acceleration is

$$a = \frac{\Delta v}{\Delta t}$$

The units of acceleration would be m/s^2 , ft/s^2 , etc.
The instantaneous acceleration is

$$a = \lim_{\Delta t \rightarrow 0} \frac{\Delta v}{\Delta t} = \frac{dv}{dt} = \frac{d}{dt} \frac{dx}{dt} = \frac{d^2 x}{dt^2}$$

Notice If v is a function of x , then

$$a = \frac{dv}{dt} = \frac{dv}{dx} \frac{dx}{dt} = v \frac{dv}{dx}$$


One more derivative

$$\frac{da}{dt} = \text{Jerk}$$


Consider the function

Plotted


$$x = -t^3 + 6t^2$$

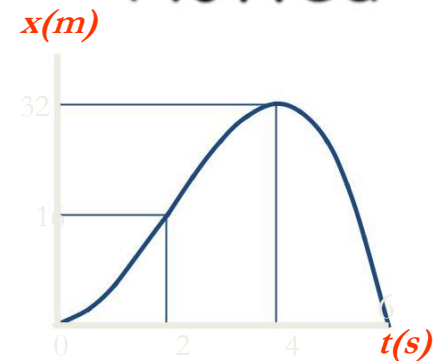


$$v = -3t^2 + 12t$$

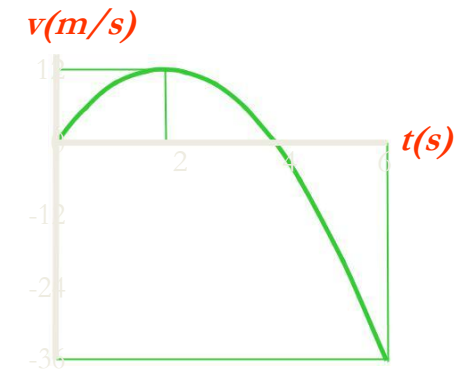

$$a = -6t + 12$$

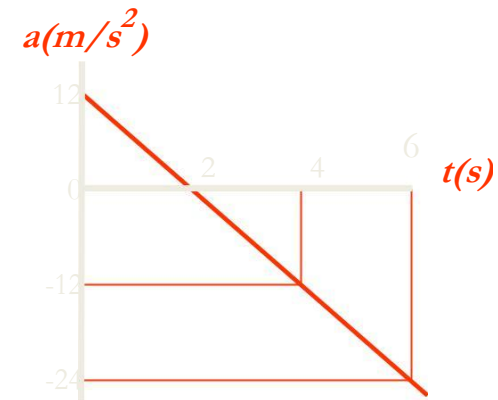


Rectilinear Motion: Position, Velocity & Acceleration

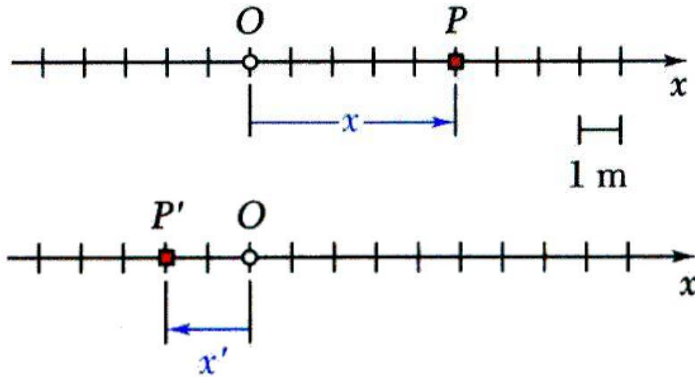




- Particle moving along a straight line is said to be in *rectilinear motion*.
- *Position coordinate* of a particle is defined by (+ or -) distance of particle from a fixed origin on the line.
- The *motion* of a particle is known if the position coordinate for particle is known for every value of time t . Motion of the particle may be expressed in the form of a function, e.g.,

$$x = 6t^2 - t^3$$

or in the form of a graph x vs. t .

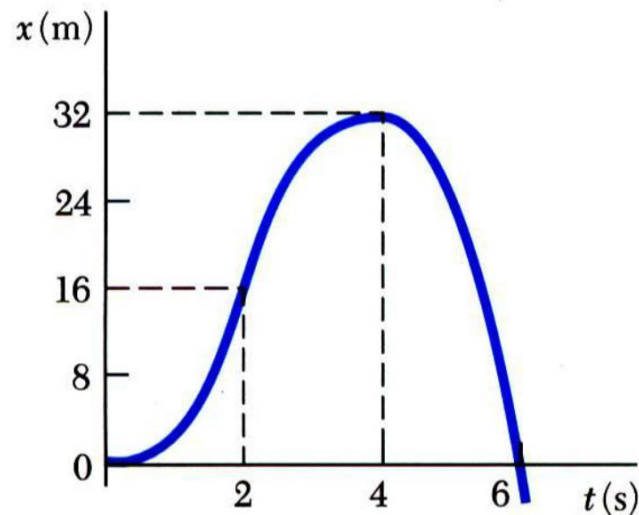

Rectilinear Motion: Position, Velocity & Acceleration

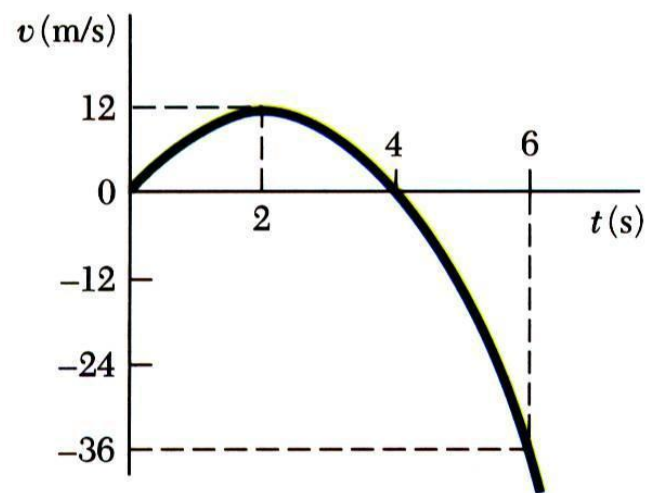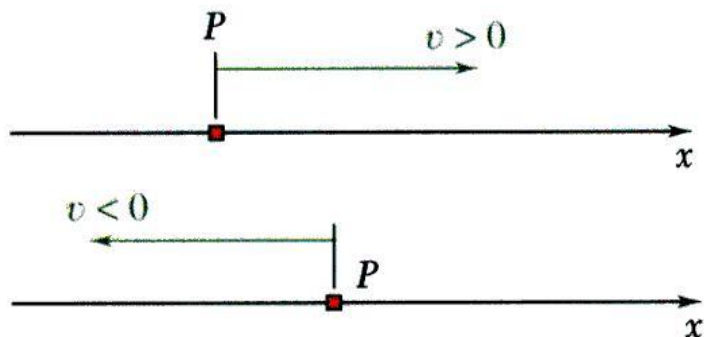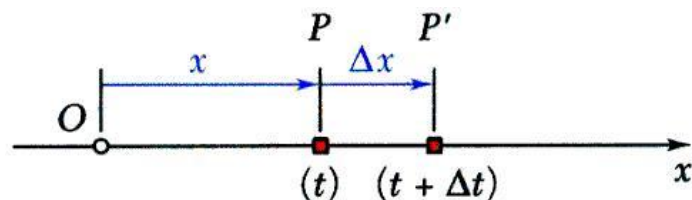

- Consider particle which occupies position P at time t and P' at $t + \Delta t$,

$$\text{Average velocity} = \frac{\Delta x}{\Delta t}$$

$$\text{Instantaneous velocity} = v = \lim_{\Delta t \rightarrow 0} \frac{\Delta x}{\Delta t}$$


- Instantaneous velocity may be positive or negative. Magnitude of velocity is referred to as *particle speed*.
- From the definition of a derivative,

$$v = \lim_{\Delta t \rightarrow 0} \frac{\Delta x}{\Delta t} = \frac{dx}{dt}$$

e.g., $x = 6t^2 - t^3$


$$v = \frac{dx}{dt} = 12t - 3t^2$$

Rectilinear Motion: Position, Velocity & Acceleration

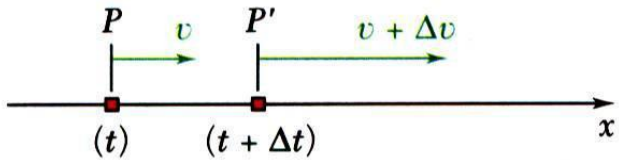

- Consider particle with velocity v at time t and v' at $t + \Delta t$,

$$\text{Instantaneous acceleration} = a = \lim_{\Delta t \rightarrow 0} \frac{\Delta v}{\Delta t}$$

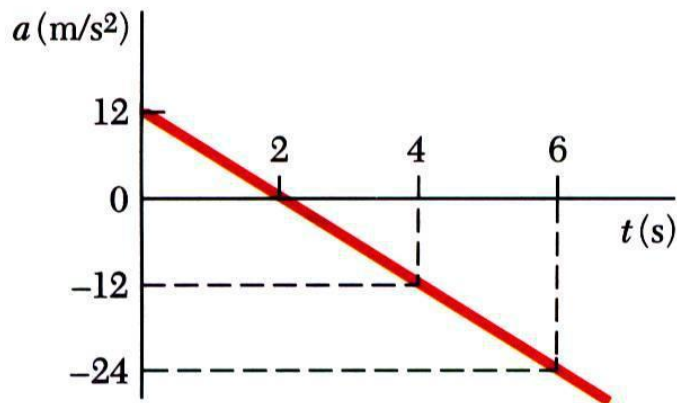


- From the definition of a derivative,

$$a = \lim_{\Delta t \rightarrow 0} \frac{\Delta v}{\Delta t} = \frac{dv}{dt} = \frac{d^2 x}{dt^2}$$

e.g. $v = 12t - 3t^2$

$$a = \frac{dv}{dt} = 12 - 6t$$

Rectilinear Motion: Position, Velocity & Acceleration

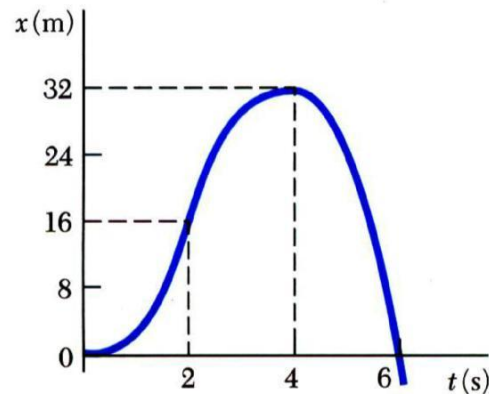



- Consider particle with motion given by

$$x = 6t^2 - t^3$$

$$v = \frac{dx}{dt} = 12t - 3t^2$$

$$a = \frac{dv}{dt} = \frac{d^2x}{dt^2} = 12 - 6t$$

- at $t = 0$, $x = 0$, $v = 0$, $a = 12 \text{ m/s}^2$
- at $t = 2 \text{ s}$, $x = 16 \text{ m}$, $v = v_{\max} = 12 \text{ m/s}$, $a = 0$
- at $t = 4 \text{ s}$, $x = x_{\max} = 32 \text{ m}$, $v = 0$, $a = -12 \text{ m/s}^2$
- at $t = 6 \text{ s}$, $x = 0$, $v = -36 \text{ m/s}$, $a = -24 \text{ m/s}^2$

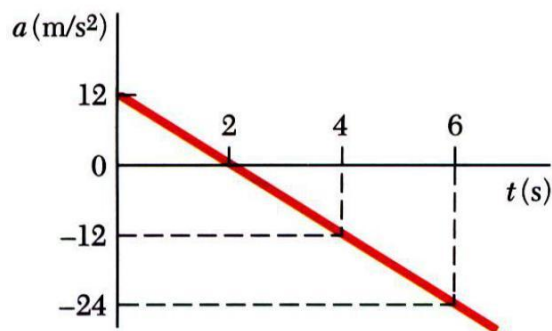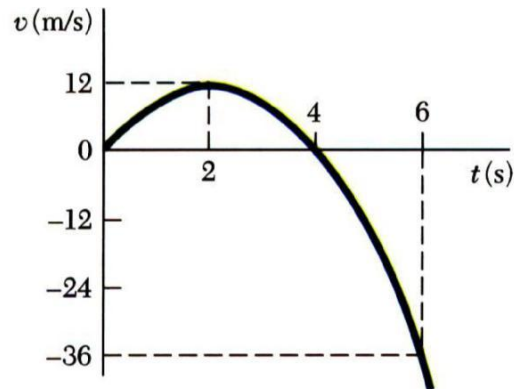

DETERMINATION OF THE MOTION OF A PARTICLE

Three common classes of motion

$$1. \quad a = f(t) = \frac{dv}{dt}$$

$$dv = a dt = f(t) dt$$

$$v - v_0 = \int_0^t f(t) dt = \frac{dx}{dt} - v_0$$

$$\frac{dx}{dt} = v_0 + \int_0^t f(t) dt$$

$$\frac{dx}{dt} = v_0 + \int_0^t f(t) dt$$

$$dx = v_0 dt + \left| \int_0^t f(t) dt \right| dt$$

$$x - x_0 = v_0 t + \int_0^t \left| \int_0^t f(t) dt \right| dt$$

$$x = x_0 + v_0 t + \int_0^t \left[\int_0^t f(\tau) d\tau \right] dt$$

$$2. \quad a = f(x) = v \frac{dv}{dx}$$

$$v dv = a dx = f(x) dx$$

$$\frac{1}{2} (v_2^2 - v_0^2) = \int_{x_0}^{x_2} f(x) dx$$

with $v = \frac{dx}{dt}$ then get $x = x(t)$

$$3. \quad a = f(v) = \frac{dv}{dt} = v \frac{dv}{dx}$$

$$\int_{v_0}^v \frac{dv}{f(v)} = \int_0^t dt = t$$

or $\int_{x_0}^x dx = \int_{v_0}^v \frac{v dv}{f(v)}$

$$\int_{x_0}^x dx = \int_{v_0}^v \frac{v dv}{f(v)}$$

Both can lead to

$$x = x(t)$$

UNIFORM RECTILINEAR MOTION

$$v = \textit{constant}$$

$$a = 0$$

$$v = \frac{dx}{dt}$$

$$x - x_0 = \int v dt = vt$$

x

$$= x_0 + vt$$

UNIFORMLY ACCELERATED RECTILINEAR MOTION

$$a = \text{constant}$$

$$v = v_0 + at$$

$$x = x_o + v_0 t + \frac{1}{2} at^2$$

Also


$$v \frac{dv}{dx} = a$$

$$v^2 = v_0^2 + 2a(x - x_o)$$

01/01/2018

Determining the Motion of a Particle

- Recall, *motion* is defined if position x is known for all time t .



$$v = \frac{dx}{dt}$$

$$a = \frac{dv}{dt}$$

$$a = \frac{d^2 x}{dt^2}$$

$$a = \frac{dv}{dt} = \frac{dv}{dx} \frac{dx}{dt} = v \frac{dv}{dx}$$

- If the acceleration is given, we can determine velocity and position by two successive integrations.
- Three classes of motion may be defined for:
 - acceleration given as a function of *time*, $a = f(t)$
 - acceleration given as a function of *position*, $a = f(x)$
 - acceleration given as a function of *velocity*, $a = f(v)$

Determining the Motion of a Particle

- **Acceleration given as a function of *time*, $a = f(t)$:**

$$a = f(t) = \frac{dv}{dt} \Rightarrow dv = f(t) dt \Rightarrow \int_{v_0}^v dv = \int_0^t f(t) dt \Rightarrow v - v_0 = \int_0^t f(t) dt$$

$$v = \frac{dx}{dt} \Rightarrow dx = v dt \Rightarrow \int_{x_0}^x dx = \int_0^t v dt \Rightarrow x - x_0 = \int_0^t v dt$$

- **Acceleration given as a function of *position*, $a = f(x)$:**

$$a = f(x) = v \frac{dv}{dx} \Rightarrow v dv = f(x) dx \Rightarrow \int_{v_0}^v v dv = \int_{x_0}^x f(x) dx \Rightarrow \frac{1}{2}v^2 - \frac{1}{2}v_0^2 = \int_{x_0}^x f(x) dx$$

$$v = \frac{dx}{dt} \Rightarrow \frac{dx}{v} = dt \Rightarrow \int_{x_0}^x \frac{dx}{v} = \int_0^t dt$$

Determining the Motion of a Particle

- **Acceleration given as a function of velocity, $a = f(v)$:**

$$a = f(v) = \frac{dv}{dt} \Rightarrow \frac{dv}{f(v)} = dt \Rightarrow \int_{v_0}^v \frac{dv}{f(v)} = \int_0^t dt \Rightarrow \int_{v_0}^v \frac{dv}{f(v)} = t$$

$$a = f(v) = v \frac{dv}{dx} \Rightarrow dx = \frac{v dv}{f(v)} \Rightarrow \int_{x_0}^x dx = \int_{v_0}^v \frac{v dv}{f(v)} \Rightarrow x - x_0 = \int_{v_0}^v \frac{v dv}{f(v)}$$

Summary

Procedure:

1. Establish a coordinate system & specify an origin
2. Remember: x, v, a, t are related by:

$$v = \frac{dx}{dt}$$


$$a = \frac{dv}{dt}$$

$$a = \frac{d^2x}{dt^2}$$

$$a = \frac{dv}{dt} = \frac{dv}{dx} \frac{dx}{dt} = v \frac{dv}{dx}$$

3. When integrating, either use limits (if known) or add a constant of integration

Sample Problem 1

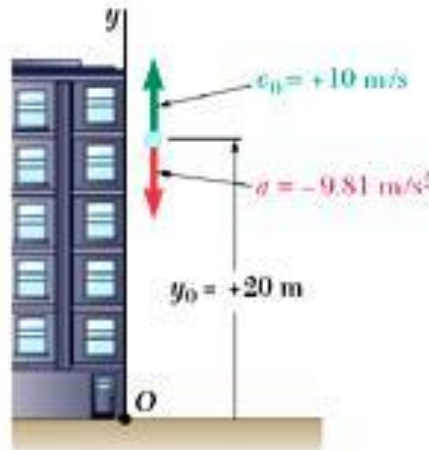


Ball tossed with 10 m/s vertical velocity from window 20 m above ground.

Determine:

- velocity and elevation above ground at time t ,
- highest elevation reached by ball and corresponding time, and
- time when ball will hit the ground and corresponding velocity.

Sample Problem 1

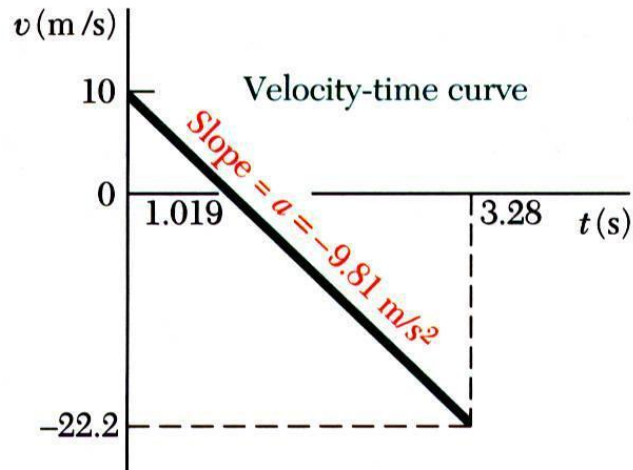

SOLUTION:

- Integrate twice to find $v(t)$ and $y(t)$.


$$\frac{dv}{dt} = a = -9.81 \text{ m/s}^2$$

$$\int_{v_0}^{v(t)} dv = -\int_0^t 9.81 dt \quad v(t) - v_0 = -9.81t$$

$$v(t) = 10 \frac{\text{m}}{\text{s}} - \left(9.81 \frac{\text{m}}{\text{s}^2} \right) t$$


$$\frac{dy}{dt} = v = 10 - 9.81t$$

$$\int_{y_0}^{y(t)} dy = \int_0^t (10 - 9.81t) dt \quad y(t) - y_0 = 10t - \frac{1}{2} 9.81t^2$$

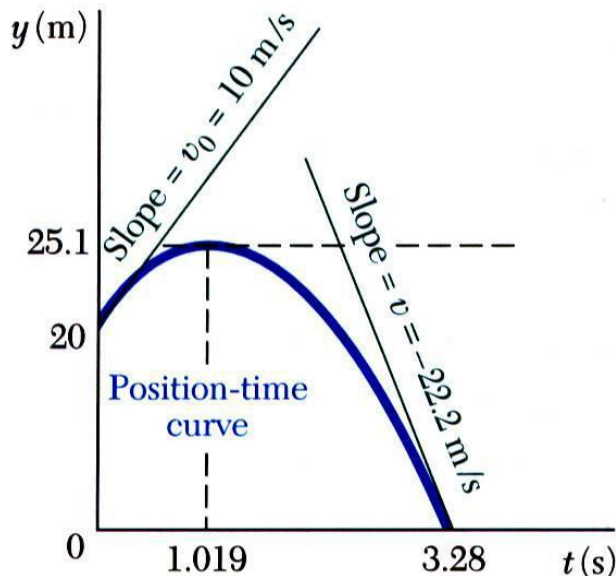

$$y(t) = 20 \text{ m} + \left(10 \frac{\text{m}}{\text{s}} \right) t - \left(\frac{4.905 \text{ m}}{\text{s}^2} \right) t^2$$


Sample Problem 1

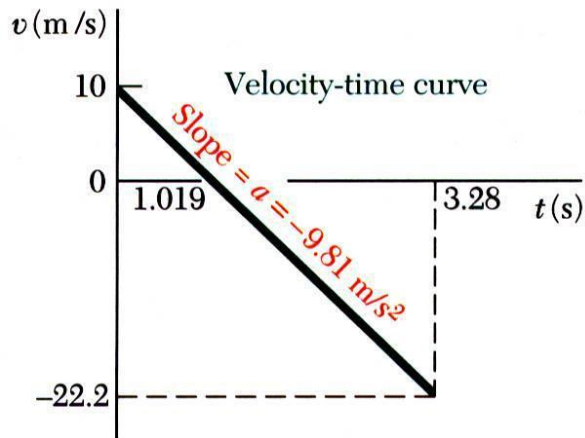

- Solve for t at which velocity equals zero and evaluate corresponding altitude.

$$v(t) = 10 \frac{\text{m}}{\text{s}} - \left(9.81 \frac{\text{m}}{\text{s}^2} \right) t$$

$$t = 1.019 \text{ s}$$

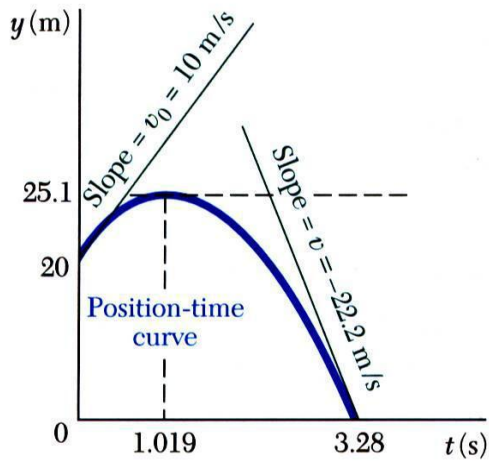


$$y(t) = 20 \text{ m} + \left(10 \frac{\text{m}}{\text{s}} \right) t - \left(4.905 \frac{\text{m}}{\text{s}^2} \right) t^2$$

$$y = 20 \text{ m} + \left(10 \frac{\text{m}}{\text{s}} \right) (1.019 \text{ s}) - \left(4.905 \frac{\text{m}}{\text{s}^2} \right) (1.019 \text{ s})^2$$

$$y = 25.1 \text{ m}$$

Sample Problem 1

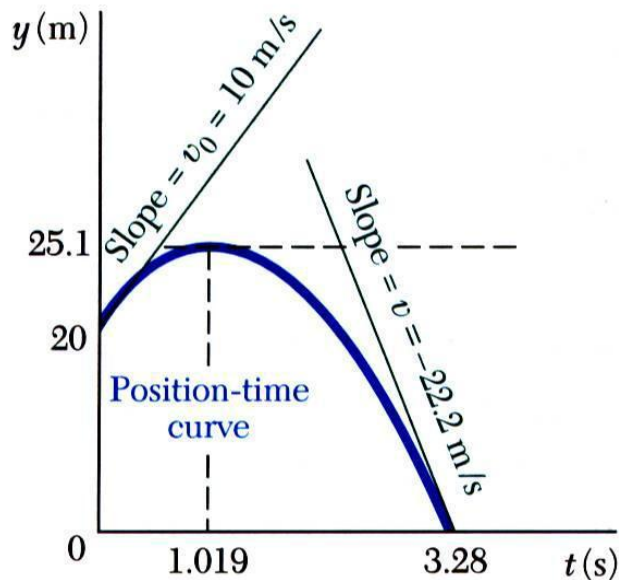

- Solve for t at which altitude equals zero and evaluate corresponding velocity.

$$y(t) = 20 \text{ m} + \left(10 \frac{\text{m}}{\text{s}} \right) t - \left(4.905 \frac{\text{m}}{\text{s}^2} \right) t^2 = 0$$


$$t = -1.243 \text{ s (meaningless)} \quad t = 3.28 \text{ s}$$

$$v(t) = 10 \frac{\text{m}}{\text{s}} - \left(9.81 \frac{\text{m}}{\text{s}^2} \right) t$$

$$v(3.28 \text{ s}) = 10 \frac{\text{m}}{\text{s}} - \left(9.81 \frac{\text{m}}{\text{s}^2} \right) (3.28 \text{ s})$$

$$v = -22.2 \frac{\text{m}}{\text{s}}$$

What if the ball is tossed downwards with the same speed? (The audience is thinking ...)

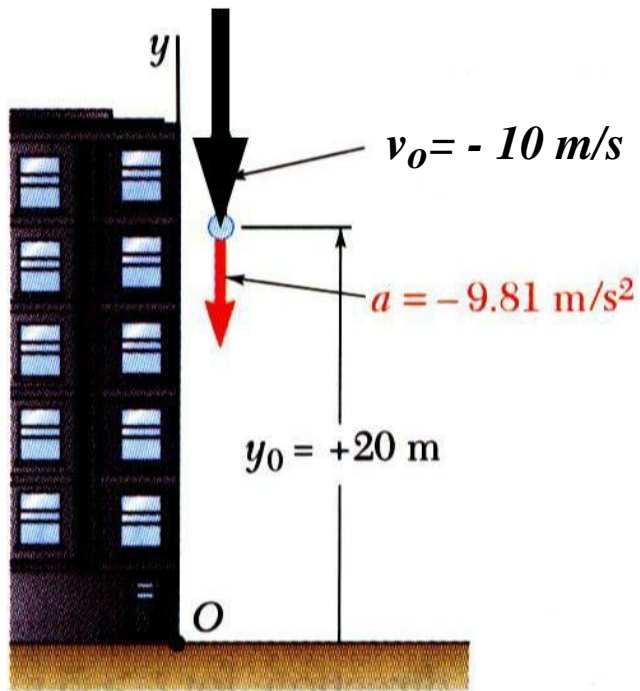

Uniform Rectilinear Motion

Uniform rectilinear motion  acceleration = 0  velocity = constant

$$\frac{dx}{dt} = v = \text{constant}$$

$$\int_{x_0}^x dx = v \int_0^t dt$$

$$x - x_0 = vt$$

$$x = x_0 + vt$$

Uniformly Accelerated Rectilinear Motion

Uniformly accelerated motion \Rightarrow acceleration = constant

$$\frac{dv}{dt} = a = \text{constant} \quad \int_{v_0}^v dv = a \int_0^t dt \quad v - v_0 = at$$

$$\Rightarrow v = v_0 + at$$

$$\frac{dx}{dt} = v_0 + at \quad \int_{x_0}^x dx = \int_0^t (v_0 + at) dt \quad x - x_0 = v_0 t + \frac{1}{2} at^2$$

$$\Rightarrow x = x_0 + v_0 t + \frac{1}{2} at^2$$

Also: $v \frac{dv}{dx} = a = \text{constant} \Rightarrow \int_{v_0}^v v dv = a \int_{x_0}^x dx \Rightarrow \frac{1}{2} (v^2 - v_0^2) = a(x - x_0)$

$$\Rightarrow v^2 = v_0^2 + 2a(x - x_0)$$

MOTION OF SEVERAL PARTICLES

When independent particles move along the same line, independent equations exist for each.
Then one should use the same origin and time.

Relative motion of two particles.

The relative position of B with respect to A

$$x_{B/A} = x_B - x_A$$


The relative velocity of B with respect to A

$$v_{B/A} = v_B - v_A$$

The relative acceleration of B with respect to A

$$a_{B/A} = a_B - a_A$$

Motion of Several Particles: Relative Motion

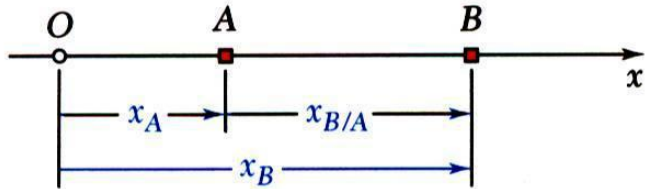

- For particles moving along the same line, displacements should be measured from the same origin in the same direction.



$$x_{B/A} = x_B - x_A = \text{relative position of } B \text{ with respect to } A$$

$$x_B = x_A + x_{B/A}$$


$$v_{B/A} = v_B - v_A = \text{relative velocity of } B \text{ with respect to } A$$

$$v_B = v_A + v_{B/A}$$

$$a_{B/A} = a_B - a_A = \text{relative acceleration of } B \text{ with respect to } A$$

$$a_B = a_A + a_{B/A}$$

Let's look at some dependent motions.

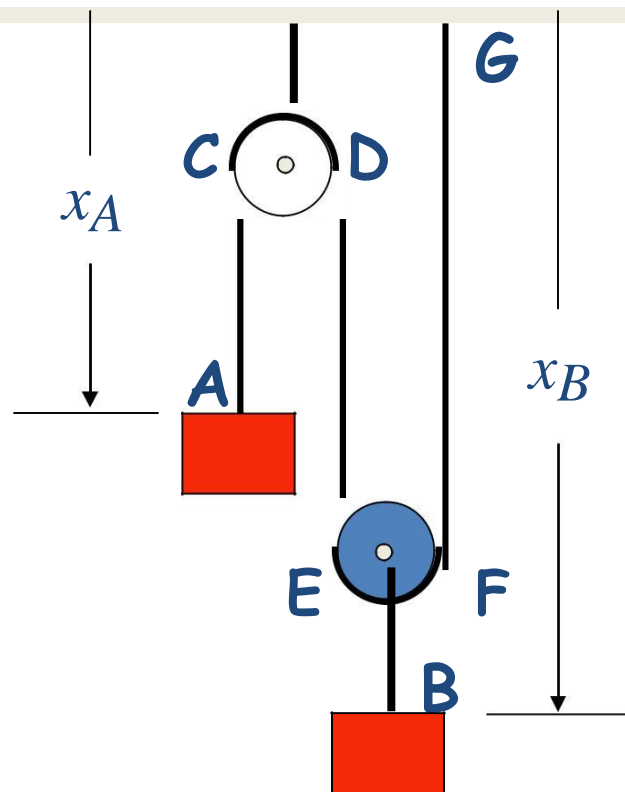


Let's look at the relationships.

$$x_A + 2x_B = \text{constant}$$

$$v_A + 2v_B = 0$$

$$a_A + 2a_B = 0$$

System has one degree of freedom since only one coordinate can be chosen independently.

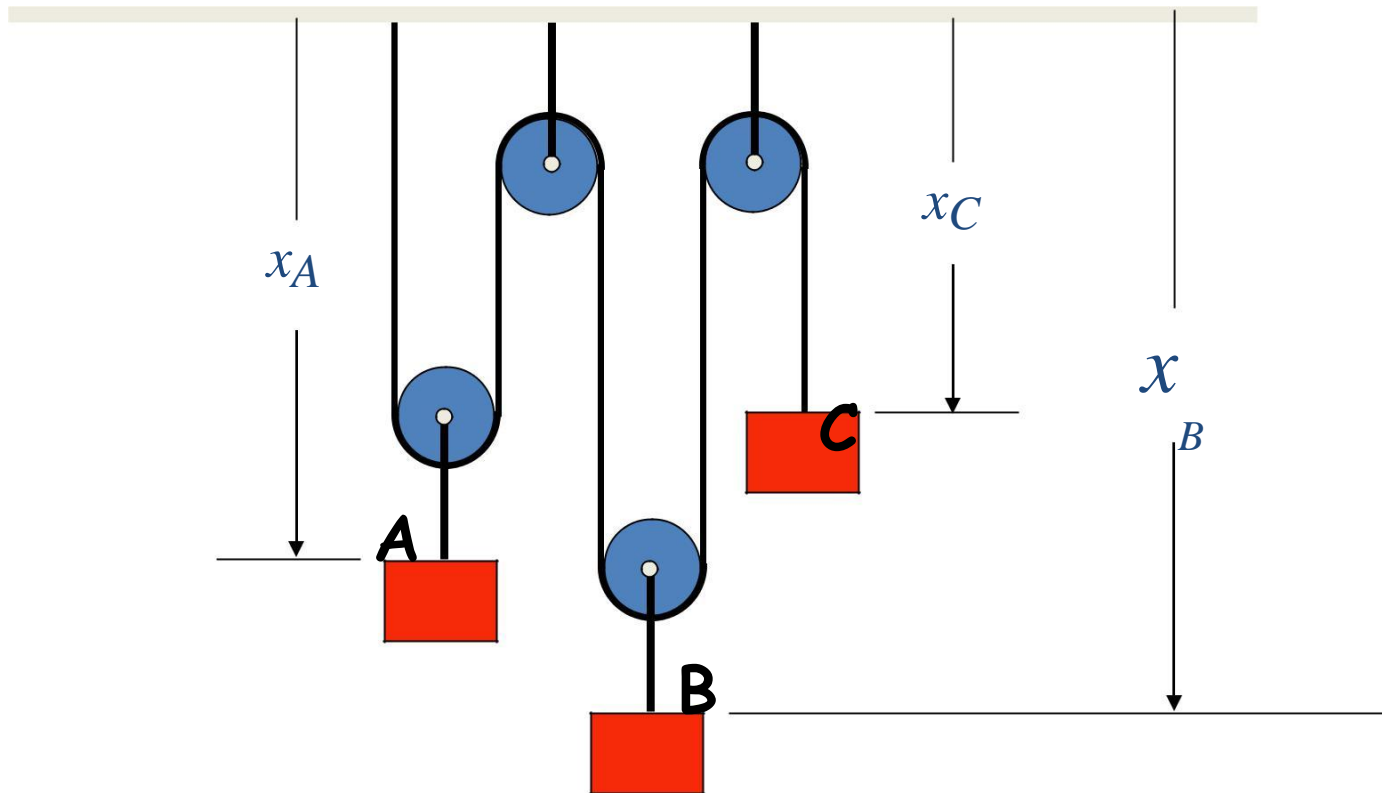

System has 2 degrees of freedom.

Let's look at the relationships.

Let's look at the relationships.

$$2x_A + 2x_B + x_C = \text{constant}$$




$$2v_A + 2v_B + v_C = 0$$

$$2a_A + 2a_B + a_C = 0$$




Sample Problem 2

Ball thrown vertically from 12 m level in elevator shaft with initial velocity of 18 m/s. At same instant, open-platform elevator passes 5 m level moving upward at 2 m/s.

Determine (a) when and where ball hits elevator and (b) relative velocity of ball and elevator at contact.

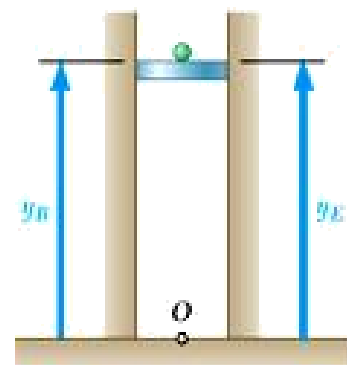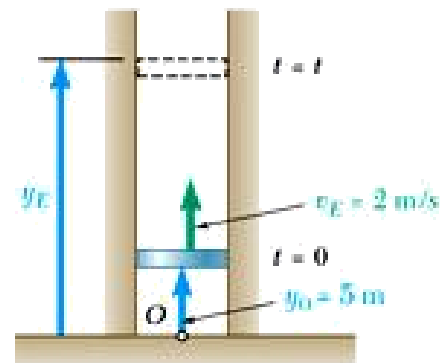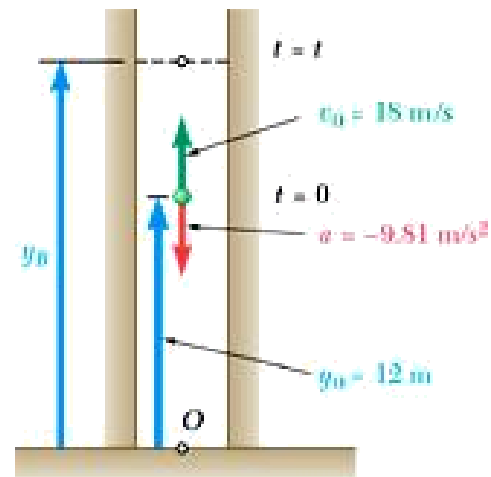

SOLUTION: Sample Problem 2

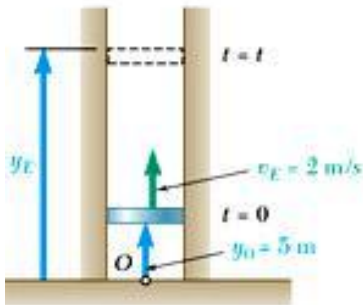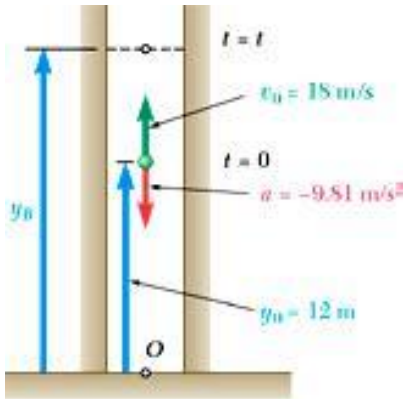


- Ball: uniformly accelerated motion (given initial position and velocity).
- Elevator: constant velocity (given initial position and velocity)
- Write equation for relative position of ball with respect to elevator and solve for zero relative position, i.e., impact.
- Substitute impact time into equation for position of elevator and relative velocity of ball with respect to elevator.

Sample Problem 3

SOLUTION:


- Ball: uniformly accelerated rectilinear motion.

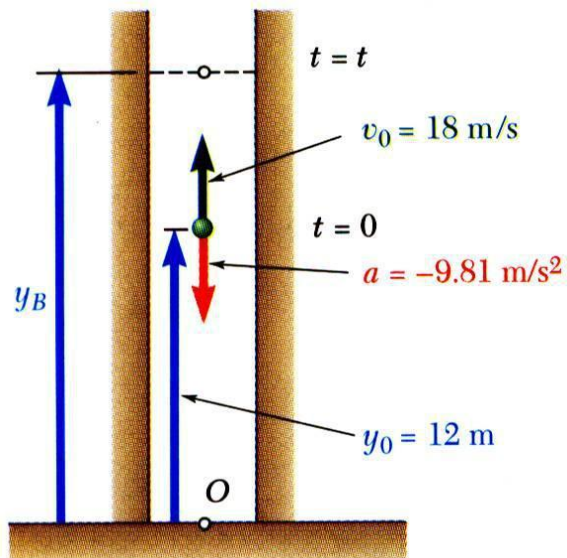

$$v_B = v_0 + at = 18 \frac{\text{m}}{\text{s}} - \left(9.81 \frac{\text{m}}{\text{s}^2} \right) t$$

$$y_B = y_0 + v_0 t + \frac{1}{2} at^2 = 12 \text{ m} + \left(18 \frac{\text{m}}{\text{s}} \right) t - \left(4.905 \frac{\text{m}}{\text{s}^2} \right) t^2$$


- Elevator: uniform rectilinear motion.

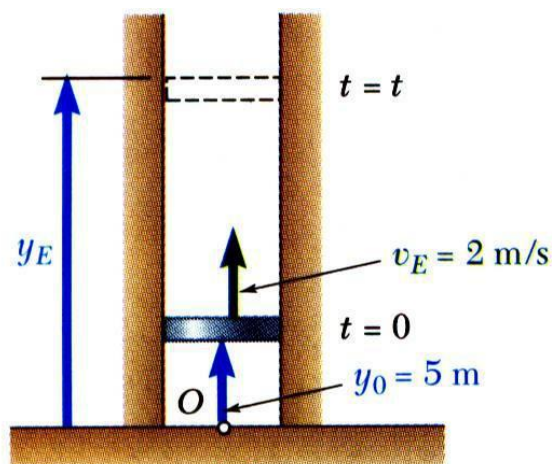

$$v_E = 2 \frac{\text{m}}{\text{s}}$$

$$y_E = y_0 + v_E t = 5 \text{ m} + \left(2 \frac{\text{m}}{\text{s}} \right) t$$

Sample Problem 3

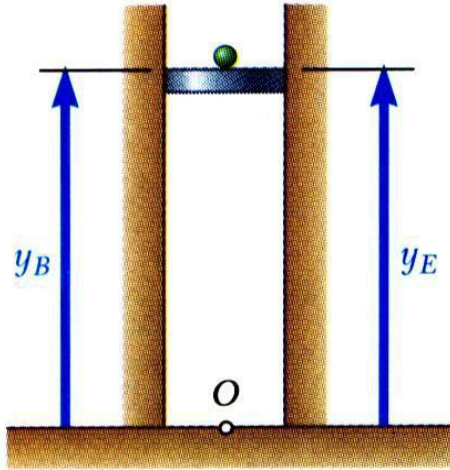

- Relative position of ball with respect to elevator:

$$y_{B/E} = (12 + 18t - 4.905t^2) - (5 + 2t) = 0$$

$$t = -0.39 \text{ s (meaningless)}$$

$$t = 3.65 \text{ s}$$

- Substitute impact time into equations for position of elevator and relative velocity of ball with respect to elevator.

$$y_E = 5 + 2(3.65)$$


$$y_E = 12.3 \text{ m}$$

$$v_{B/E} = (18 - 9.81t) - 2$$

$$= 16 - 9.81(3.65)$$

$$v_{B/E} = -19.81 \frac{\text{m}}{\text{s}}$$

Motion of Several Particles: Dependent Motion

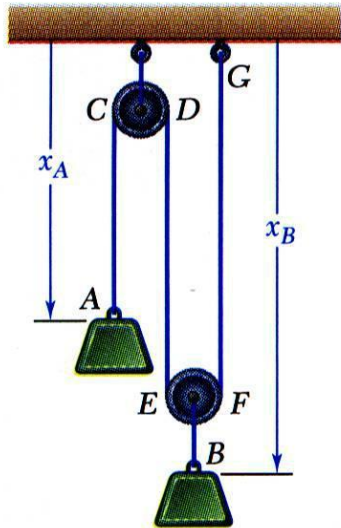

- Position of a particle may *depend* on position of one or more other particles.
- Position of block *B* depends on position of block *A*. Since rope is of constant length, it follows that sum of lengths of segments must be constant.

$$x_A + 2x_B = \text{constant (one degree of freedom)}$$


- Positions of three blocks are dependent.

$$2x_A + 2x_B + x_C = \text{constant (two degrees of freedom)}$$

- For linearly related positions, similar relations hold between velocities and accelerations.

$$2\frac{dx_A}{dt} + 2\frac{dx_B}{dt} + \frac{dx_C}{dt} = 0 \quad \text{or} \quad 2v_A + 2v_B + v_C = 0$$


$$2\frac{dv_A}{dt} + 2\frac{dv_B}{dt} + \frac{dv_C}{dt} = 0 \quad \text{or} \quad 2a_A + 2a_B + a_C = 0$$

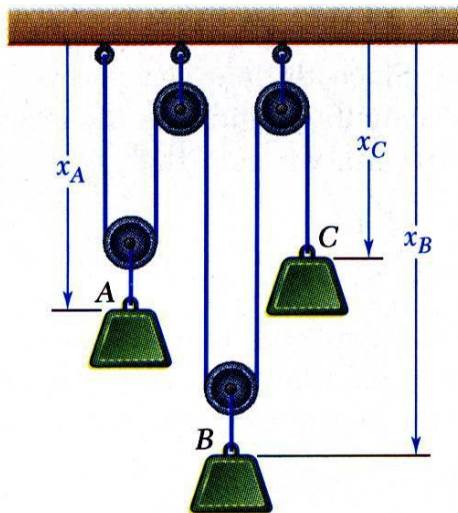

Applications




Sample Problem 4

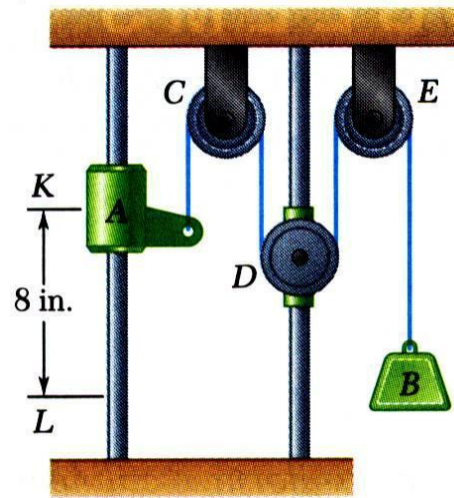

Pulley *D* is attached to a collar which is pulled down at 3 in./s. At $t = 0$, collar *A* starts moving down from *K* with constant acceleration and zero initial velocity. Knowing that velocity of collar *A* is 12 in./s as it passes *L*, determine the change in elevation, velocity, and acceleration of block *B* when block *A* is at *L*.

Sample Problem 4

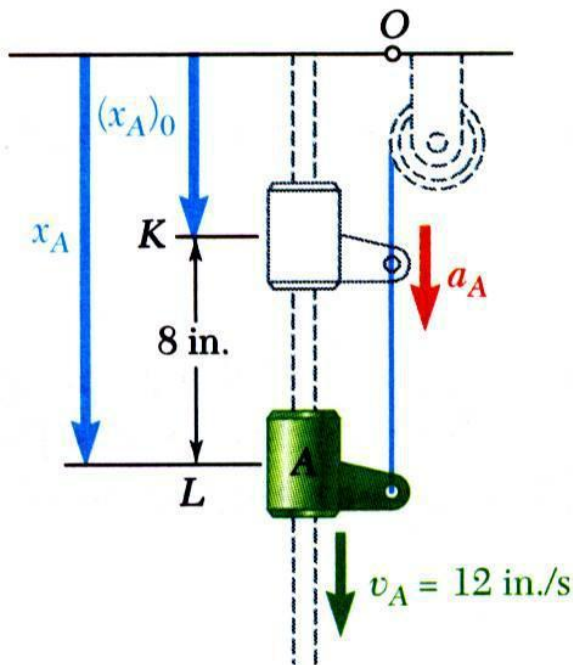

SOLUTION:

- Define origin at upper horizontal surface with positive displacement downward.
- Collar A has uniformly accelerated rectilinear motion. Solve for acceleration and time t to reach L .


$$v_{A2}^2 = (v_{A0})^2 + 2a_A [x_A - (x_A)_0]$$

$$\left(12 \frac{\text{in.}}{\text{s}} \right)^2 = 2a_A(8\text{in.}) \quad a_A = 9 \frac{\text{in.}}{\text{s}^2}$$

$$v_A = (v_{A0}) + a_A t$$

$$12 \frac{\text{in.}}{\text{s}} = 9 \frac{\text{in.}}{\text{s}^2} t \quad t = 1.333 \text{ s}$$

Sample Problem 4

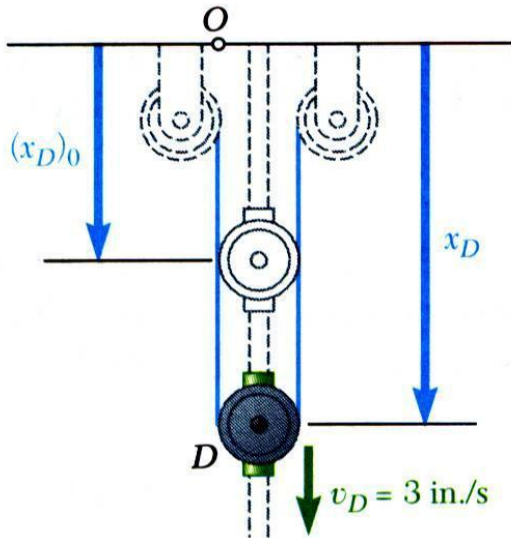


- Pulley D has uniform rectilinear motion. Calculate change of position at time t .

$$x_D = (x_D)_0 + v_D t$$

$$x_D - (x_D)_0 = \left(3 \frac{\text{in.}}{\text{s}} \right) (1.333 \text{ s}) = 4 \text{ in.}$$

- Block B motion is dependent on motions of collar A and pulley D . Write motion relationship and solve for change of block B position at time t .

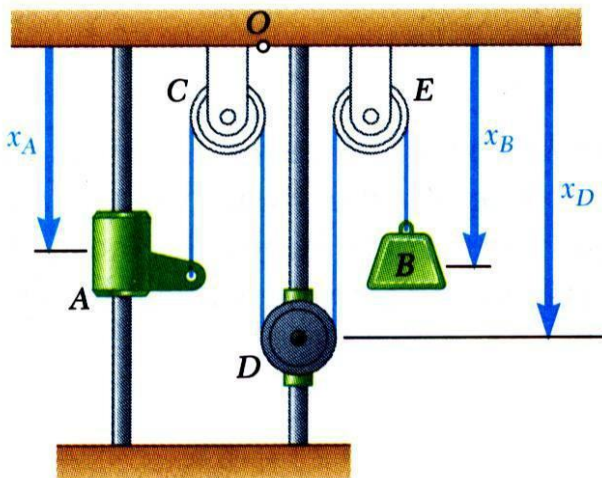

Total length of cable remains constant,


$$x_A + 2x_D + x_B = (x_A)_0 + 2(x_D)_0 + (x_B)_0$$

$$[x_A - (x_A)_0] + 2[x_D - (x_D)_0] + [x_B - (x_B)_0] = 0$$

$$(8 \text{ in.}) + 2(4 \text{ in.}) + [x_B - (x_B)_0] = 0$$

$$x_B - (x_B)_0 = -16 \text{ in.}$$

Sample Problem 4

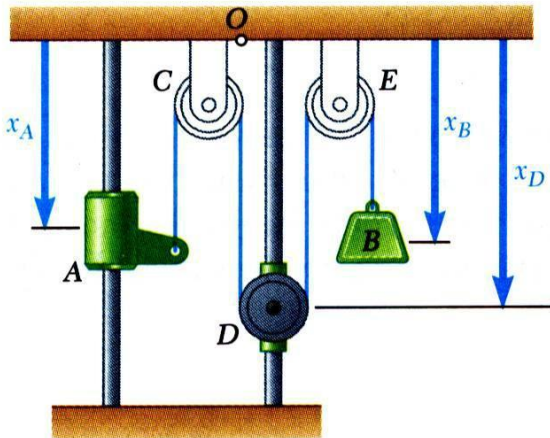

- Differentiate motion relation twice to develop equations for velocity and acceleration of block B .

$$x_A + 2x_D + x_B = \text{constant}$$

$$v_A + 2v_D + v_B = 0$$

$$\left(12 \frac{\text{in.}}{\text{s}} \right) + 2 \left(3 \frac{\text{in.}}{\text{s}} \right) + v_B = 0$$

$$v_B = -18 \frac{\text{in.}}{\text{s}}$$

$$a_A + 2a_D + a_B = 0$$

$$\left(9 \frac{\text{in.}}{\text{s}^2} \right) + a_B = 0$$

$$a_B = -9 \frac{\text{in.}}{\text{s}^2}$$

Curvilinear Motion


A particle moving along a curve other than a straight line is said to be in *curvilinear motion*.





http://news.yahoo.com/photos/ss/441/im:/070123/ids_photos_wl/r2207709100.jpg

CURVILINEAR MOTION OF PARTICLES



POSITION VECTOR, VELOCITY, AND ACCELERATION

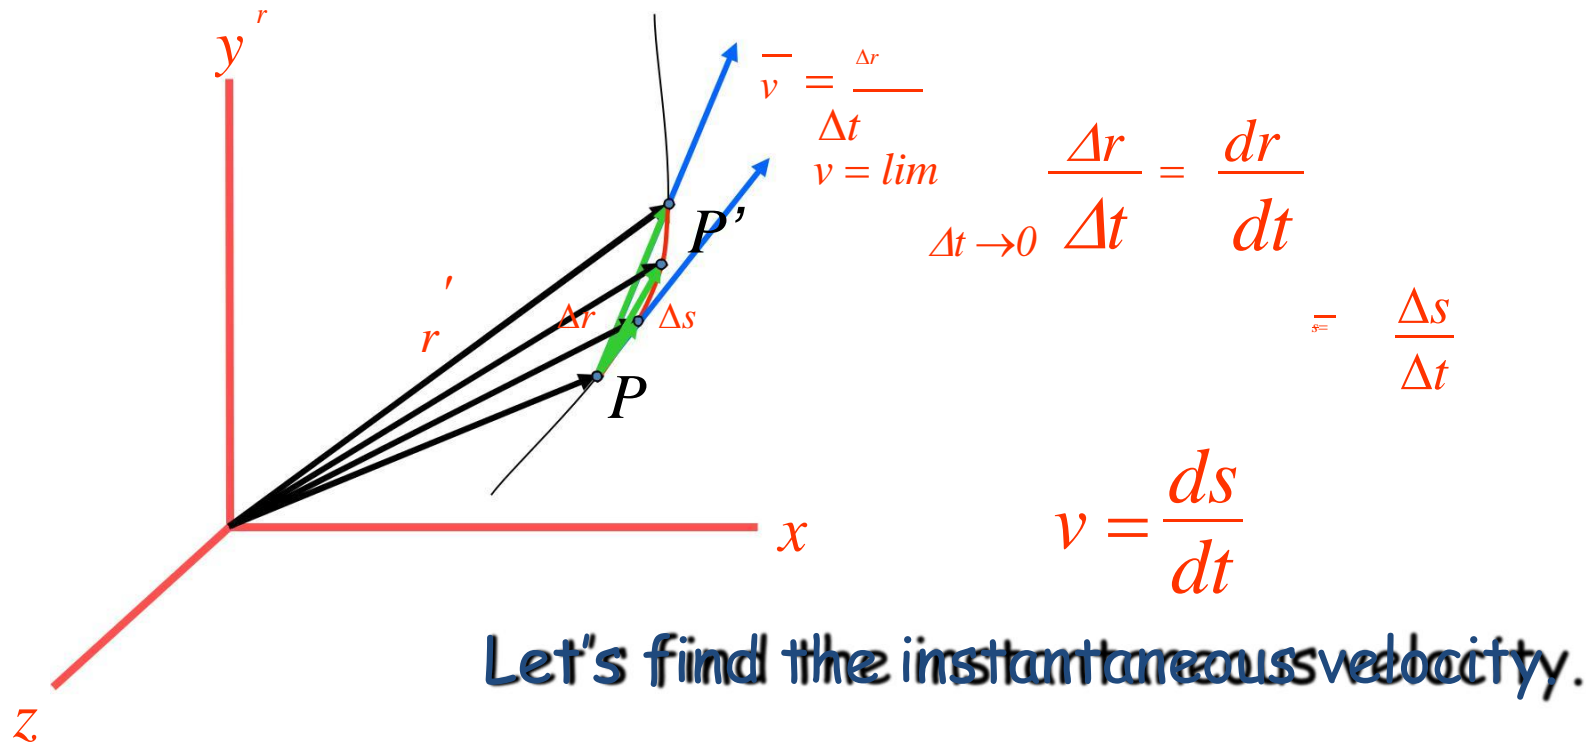

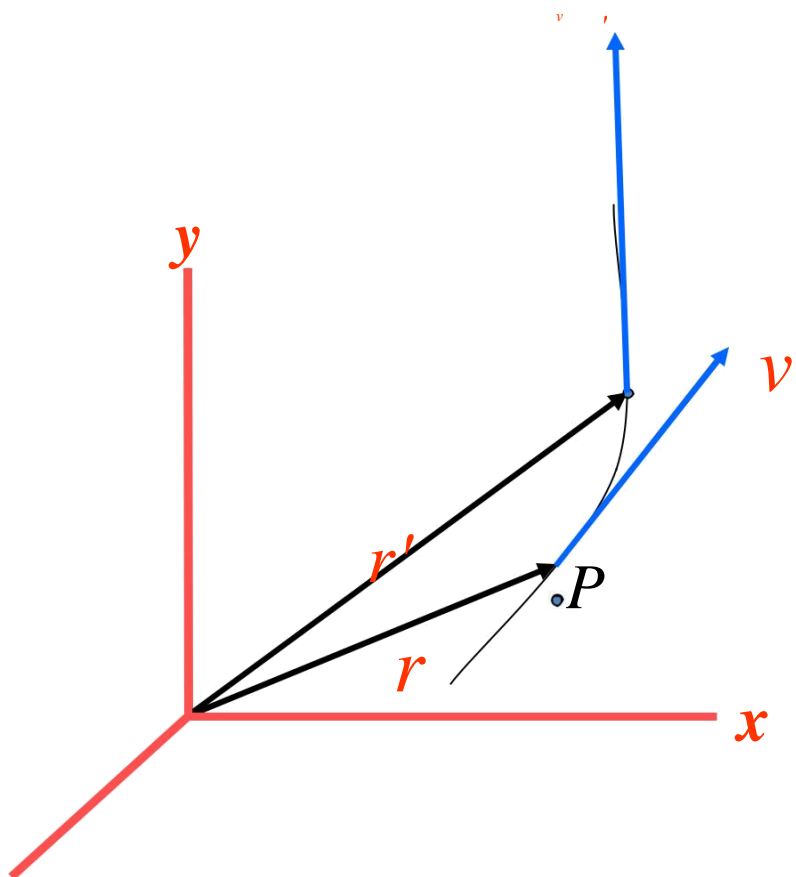

$$a = \frac{\Delta v}{\Delta t}$$

$$a = \lim_{\Delta t \rightarrow 0} \frac{\Delta v}{\Delta t} = \frac{dv}{dt}$$

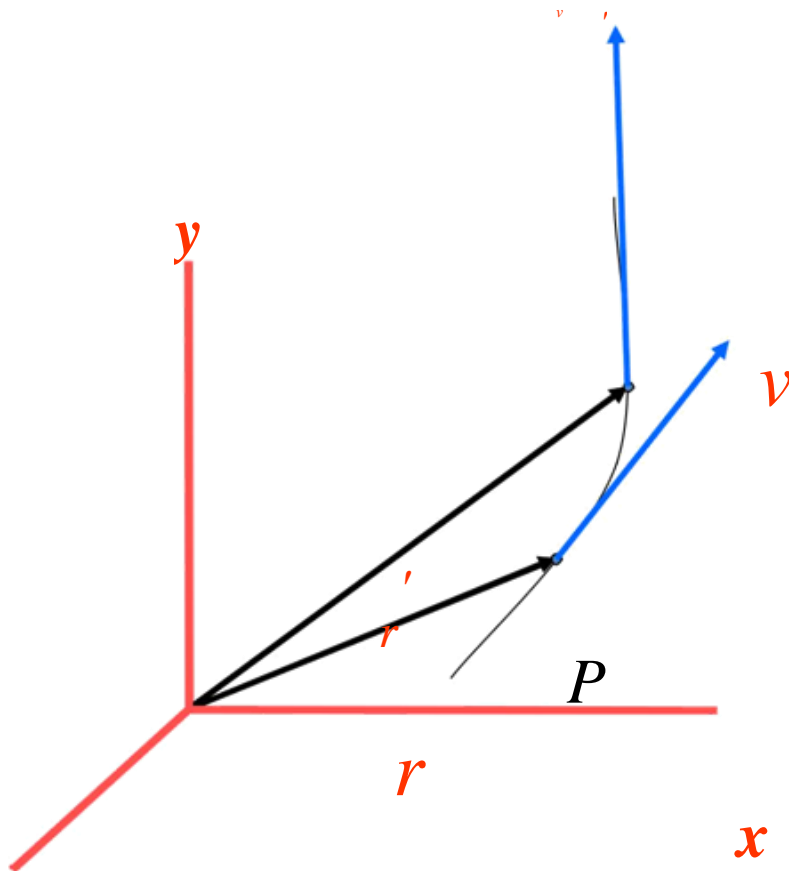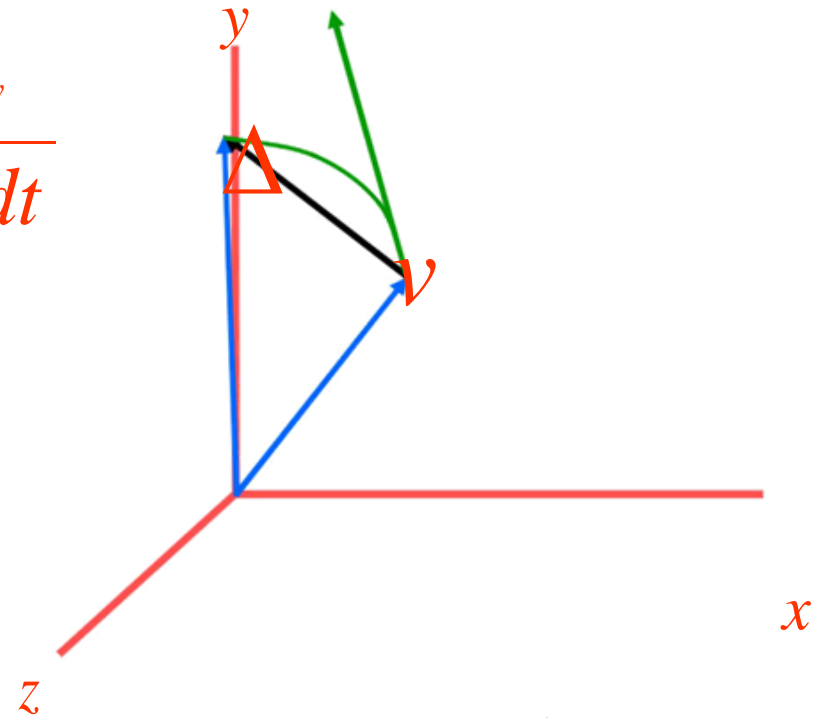

$$a = \frac{\Delta v}{\Delta t}$$

Note that the acceleration is not necessarily along the direction of the velocity.

DERIVATIVES OF VECTOR FUNCTIONS

$$\frac{dP}{du} = \lim_{\Delta u \rightarrow 0} \frac{\Delta P}{\Delta u} = \lim_{\Delta u \rightarrow 0} \left[\frac{P(u + \Delta u) - P(u)}{\Delta u} \right]$$

$$\frac{d(P + Q)}{du} = \frac{dP}{du} + \frac{dQ}{du} + f \frac{dP}{du}$$

$$\frac{d(fP)}{du} = du \frac{df}{du} P$$

$$\frac{d(P \cdot Q)}{du} = \frac{dP}{du} \cdot Q + P \cdot \frac{dQ}{du}$$

$$\frac{d(P \times Q)}{du} = \frac{dP}{du} \times Q + P \times \frac{dQ}{du}$$

$$\frac{dP}{du} = \frac{dP}{du} \hat{x} \dot{i} + \frac{dP}{du} \hat{y} \dot{j} + \frac{dP}{du} \hat{z} \dot{k}$$


Rate of Change of a Vector


$$\mathbf{P} = P_x \hat{i} + P_y \hat{j} + P_z \hat{k}$$

The rate of change of a vector is the same with respect to a fixed frame and with respect to a frame in translation.


RECTANGULAR COMPONENTS OF VELOCITY AND ACCELERATION

$$\begin{aligned}
 r &= x\hat{i} + y\hat{j} + z\hat{k} \\
 v &= \dot{x}\hat{i} + \dot{y}\hat{j} + \dot{z}\hat{k} \\
 a &= \ddot{x}\hat{i} + \ddot{y}\hat{j} + \ddot{z}\hat{k}
 \end{aligned}$$

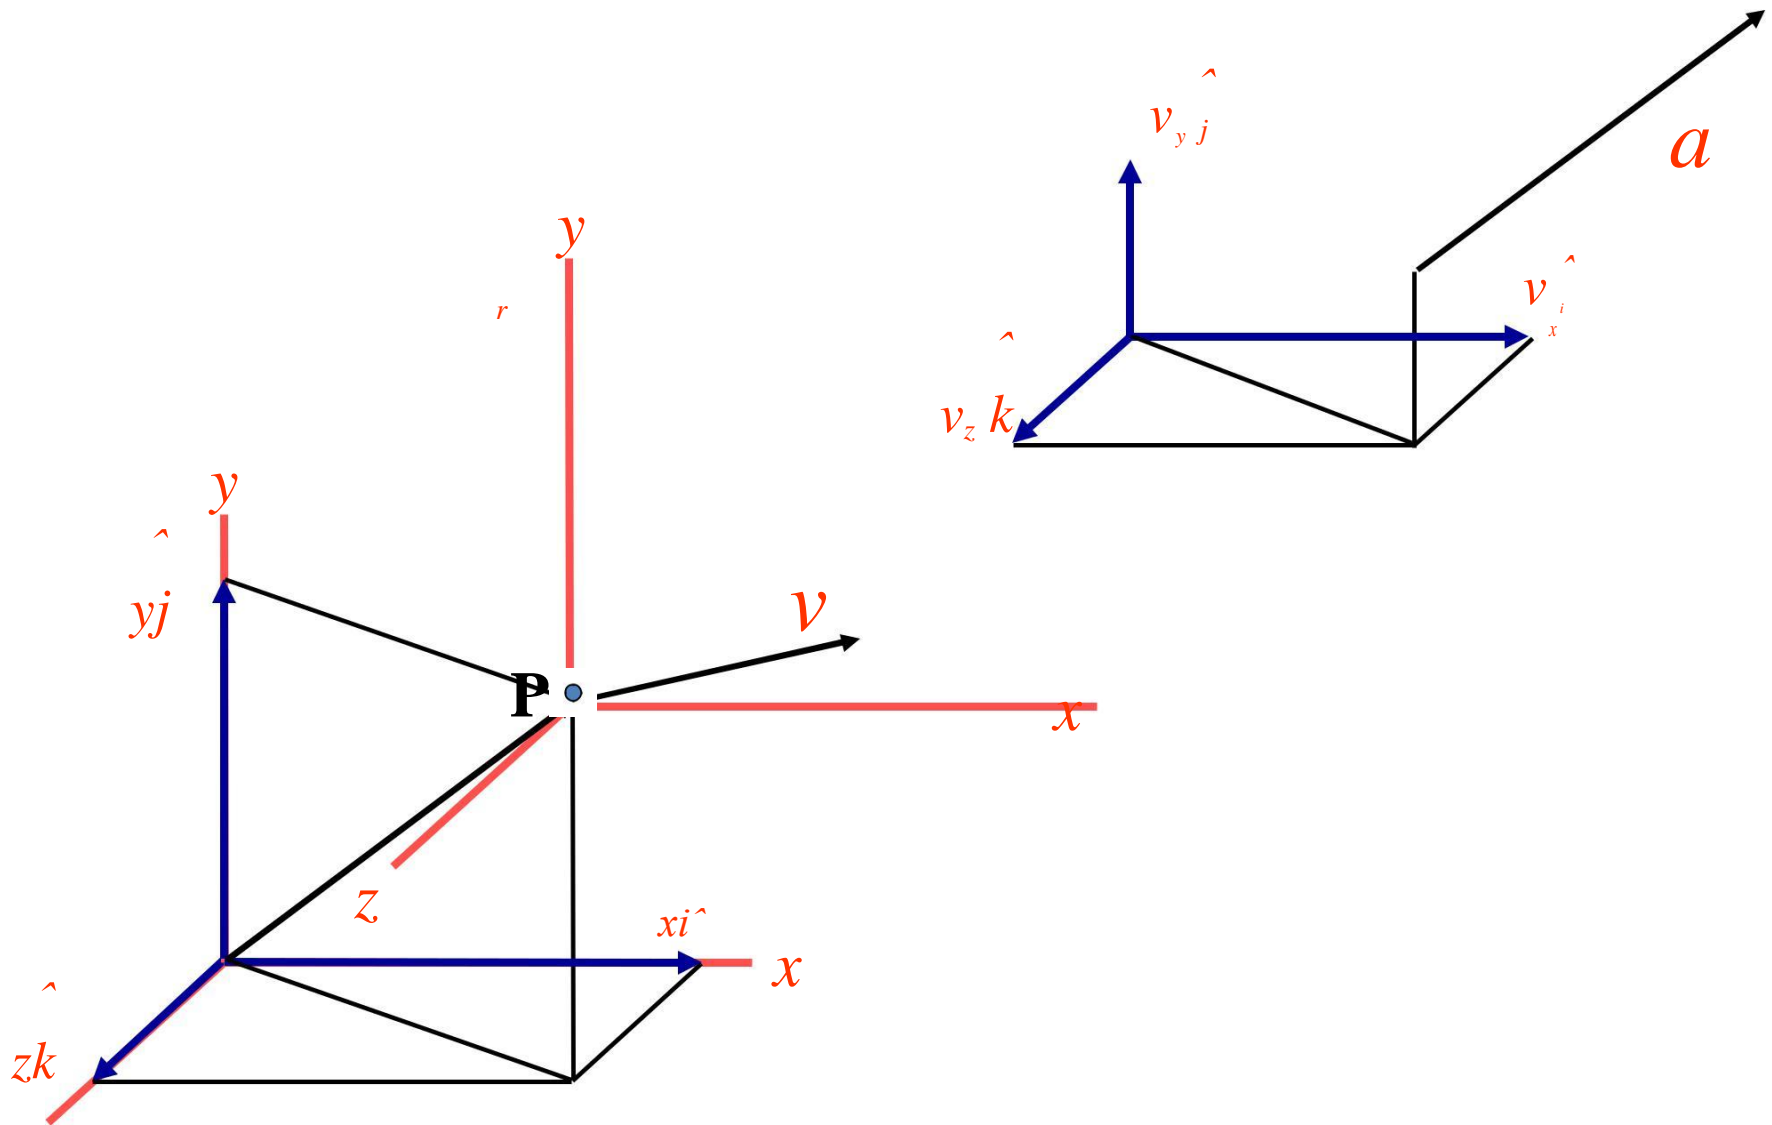

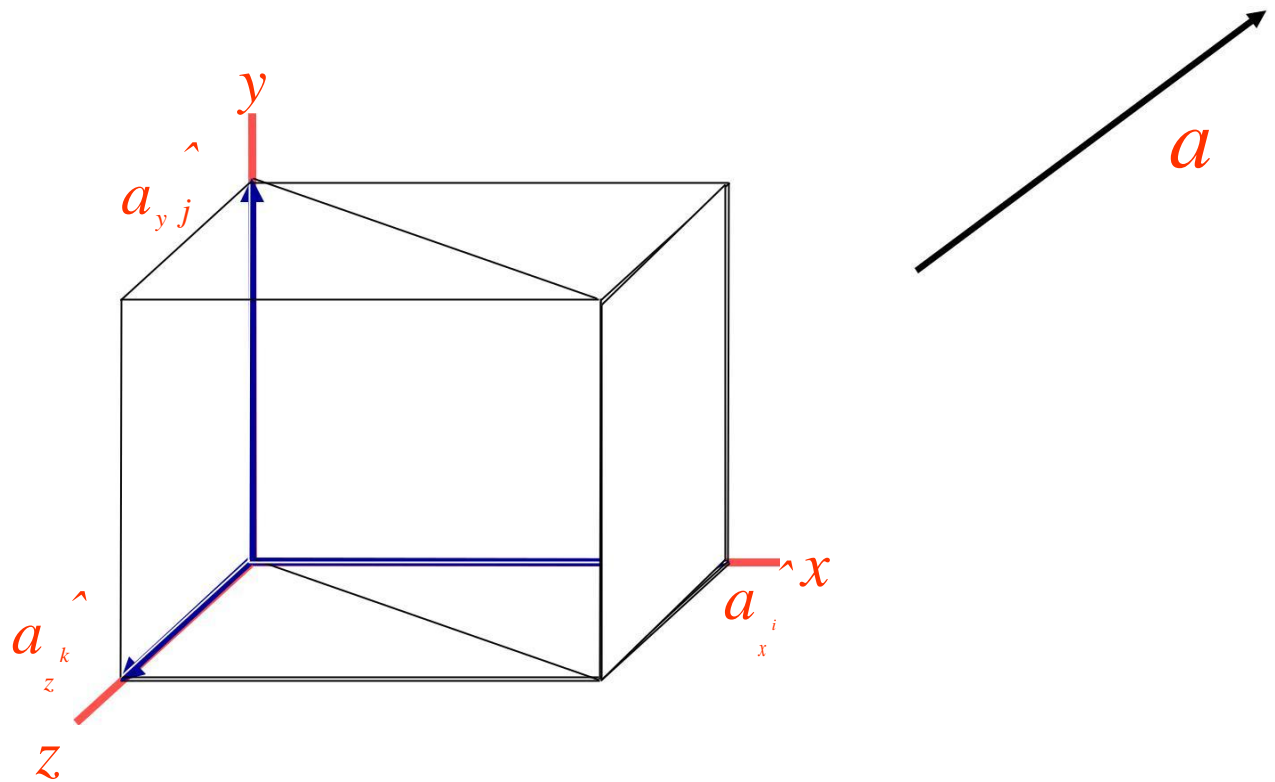

Velocity Components in Projectile Motion

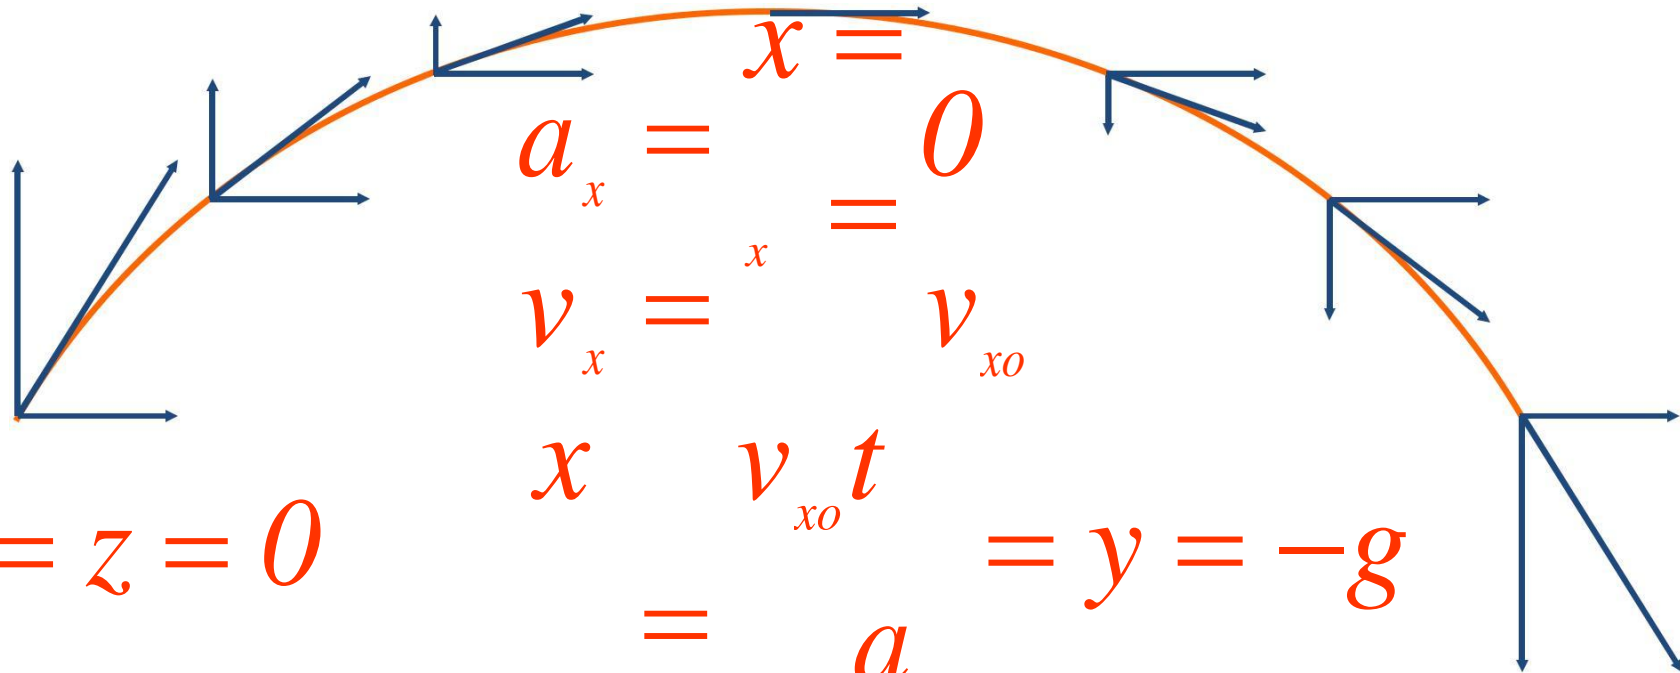

$$a_x = a_y = 0$$

$$a_x = 0$$

$$v_x = v_{x0}$$

$$x = v_{x0} t$$


$$v_y = v_{y0} - gt$$

$$y = v_{y0} t - \frac{1}{2} gt^2$$

$$y = 0$$

$$y = v_{y0} t - \frac{1}{2} gt^2$$

MOTION RELATIVE TO A FRAME IN TRANSLATION

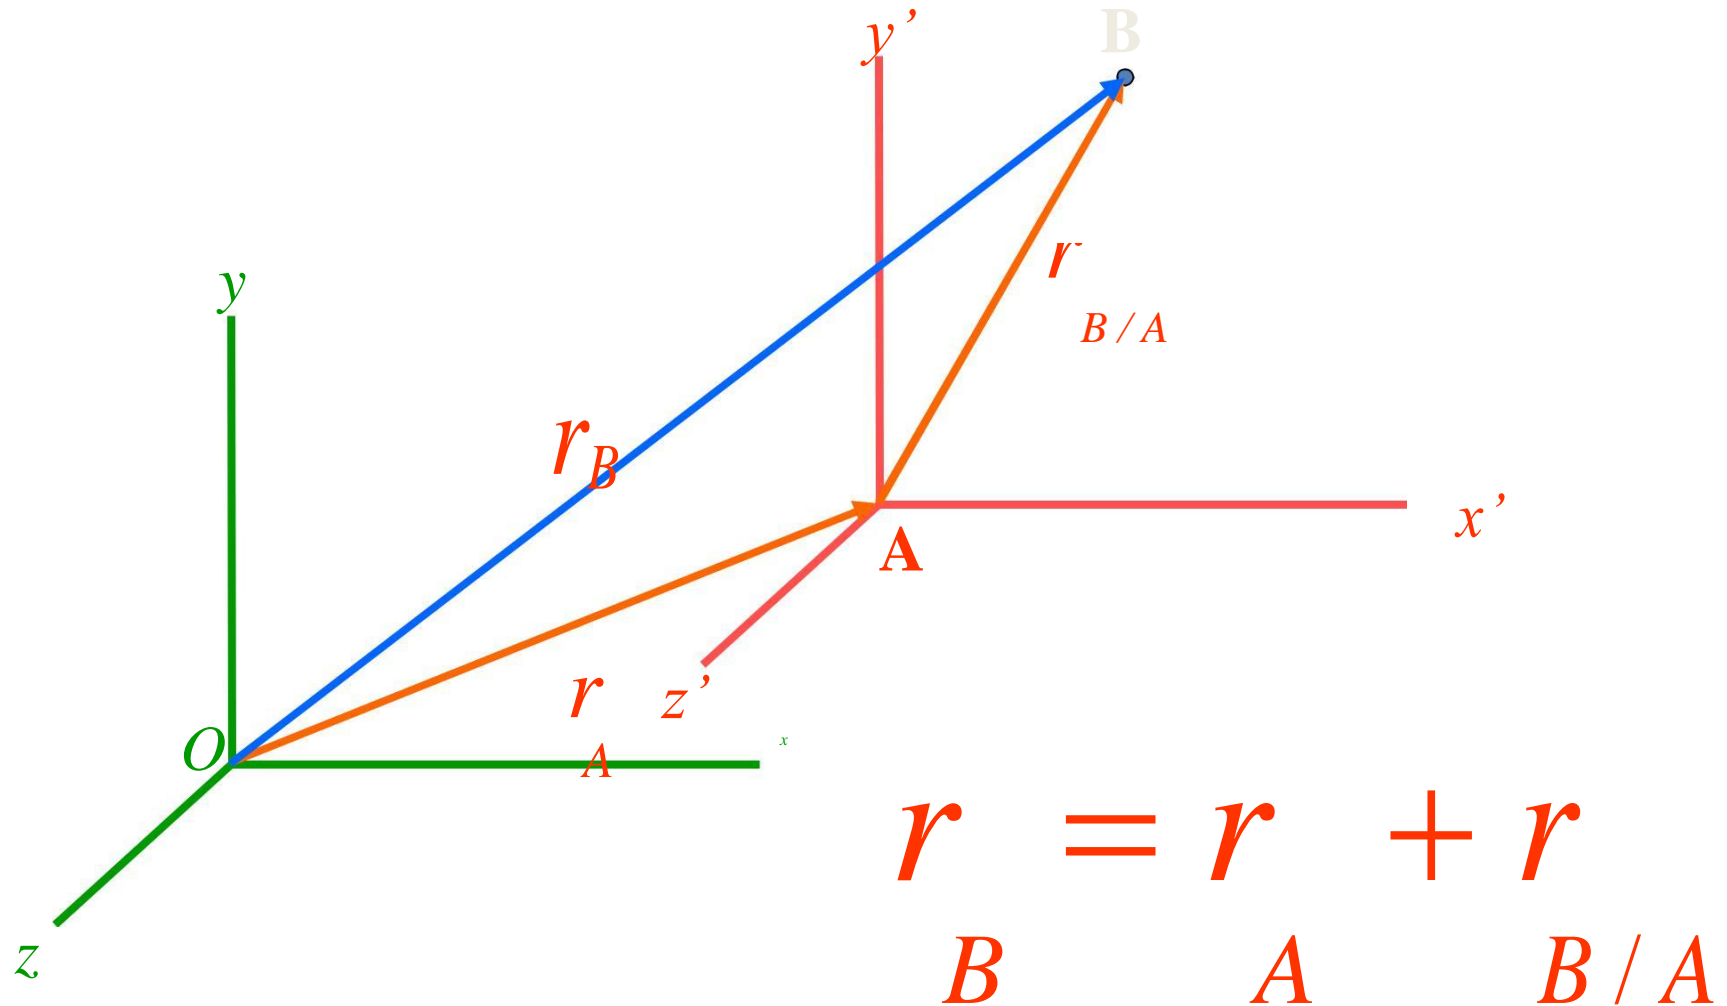

$$r_B = r_A v_A$$

$$r_B = r_A = a_A$$

$$v_B =$$

$$v_B v_A$$

$$a_B =$$

$$+ \mathbf{r}_{B/A}$$

$$+ \mathbf{v}_{B/A}$$

$$+ \mathbf{v}_{B/A}$$

$$\mathbf{v}_{B/A}$$

$$+$$

$$\mathbf{a}_{B/A}$$

$$+$$

$$\begin{array}{ccccc}
 a_B & = & a_A & + & a_{B/A} \\
 = & & & + & \\
 r_B & & r_A & & r_{B/A}
 \end{array}$$


TANGENTIAL AND NORMAL COMPONENTS


Velocity is tangent to the path of a particle.

Acceleration is not necessarily in the same direction.

It is often convenient to express the acceleration in terms of components tangent and normal to the path of the particle.

Plane Motion of a Particle

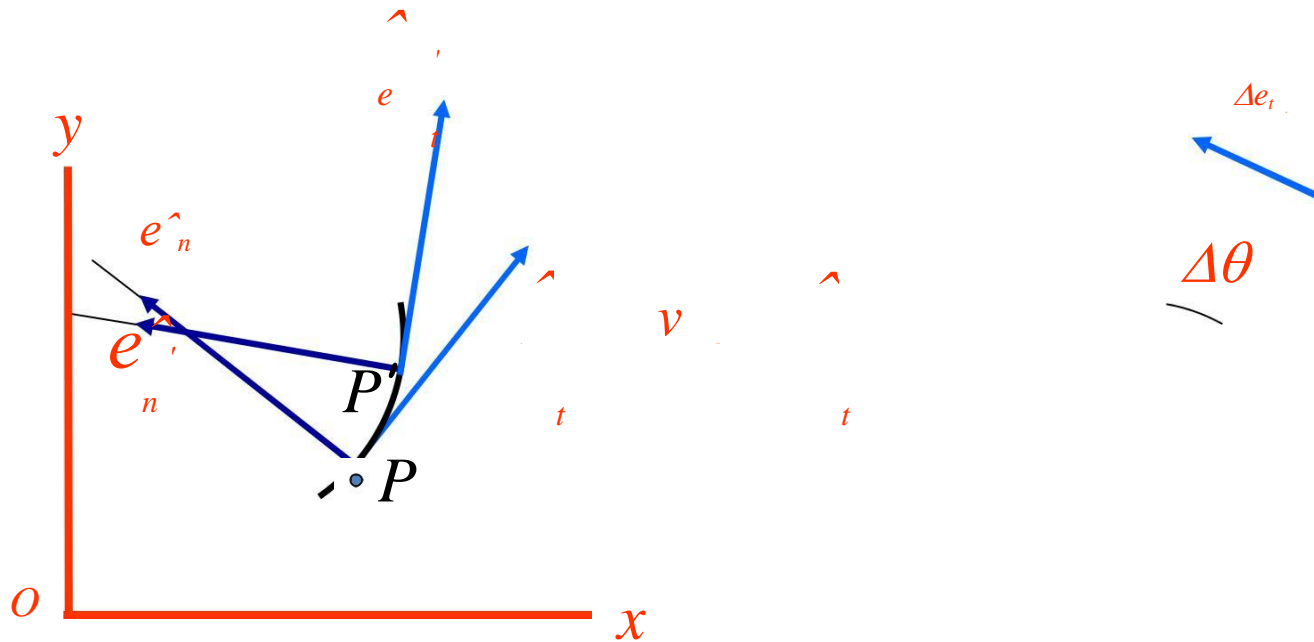

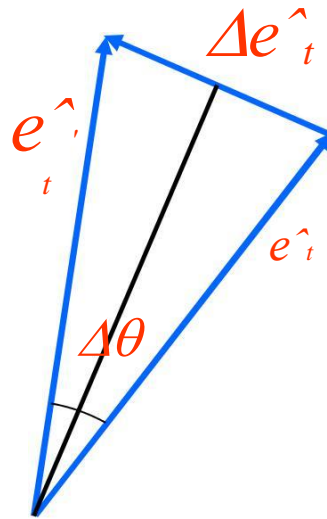


$$\lim_{\Delta\theta \rightarrow 0} \frac{\Delta \hat{e}_t}{\Delta\theta} = \hat{e}_n \quad \lim_{\Delta\theta \rightarrow 0} \left[\frac{2 \sin(\Delta\theta/2)}{\Delta\theta} \right] = 1$$

$$\hat{e}_n = \lim_{\Delta\theta \rightarrow 0} \left[\frac{\sin(\Delta\theta/2)}{\Delta\theta/2} \right] \hat{e}_t$$

$$\hat{e}_n = \frac{d\hat{e}_t}{d\theta}$$

$$\frac{d\hat{e}_n}{dt} = \frac{d\theta}{dt} \hat{e}_t$$

$$a = \frac{dv}{dt} \hat{e}_t + v \frac{d\hat{e}_t}{dt}$$

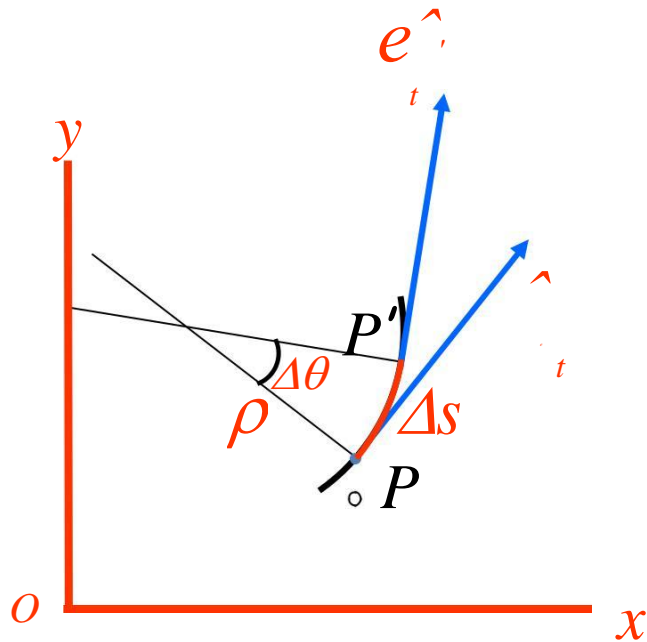

$$a = \frac{dv}{dt} e_t + v \frac{d\hat{e}_t}{dt}$$

$$\Delta s = \rho \Delta \theta$$

$$\rho = \lim_{\Delta \theta \rightarrow 0} \frac{\Delta s}{\Delta \theta} = \frac{ds}{d\theta}$$

$$\frac{d\hat{e}_t}{dt} = \frac{d\hat{e}_t}{d\theta} \frac{d\theta}{ds} \frac{ds}{dt} = \frac{d\hat{e}_t}{d\theta} \frac{v}{\rho} = \frac{v}{\rho} \hat{e}_n$$

$$a = \frac{dv}{dt} \hat{e}_t + \frac{v^2}{\rho} \hat{e}_n$$

$$a = \frac{dv}{dt} \hat{e}_t + \frac{v\dot{\rho}}{\rho} \hat{e}_n$$


$$= \quad \hat{\quad} + \quad \hat{\quad}$$

$$a = a_t \hat{e}_t + a_n \hat{e}_n$$

$$a_t = \frac{dv}{dt} \qquad a_n = \frac{v^2}{\rho}$$

Discuss changing radius of curvature for highway cur


Motion of a Particle in Space

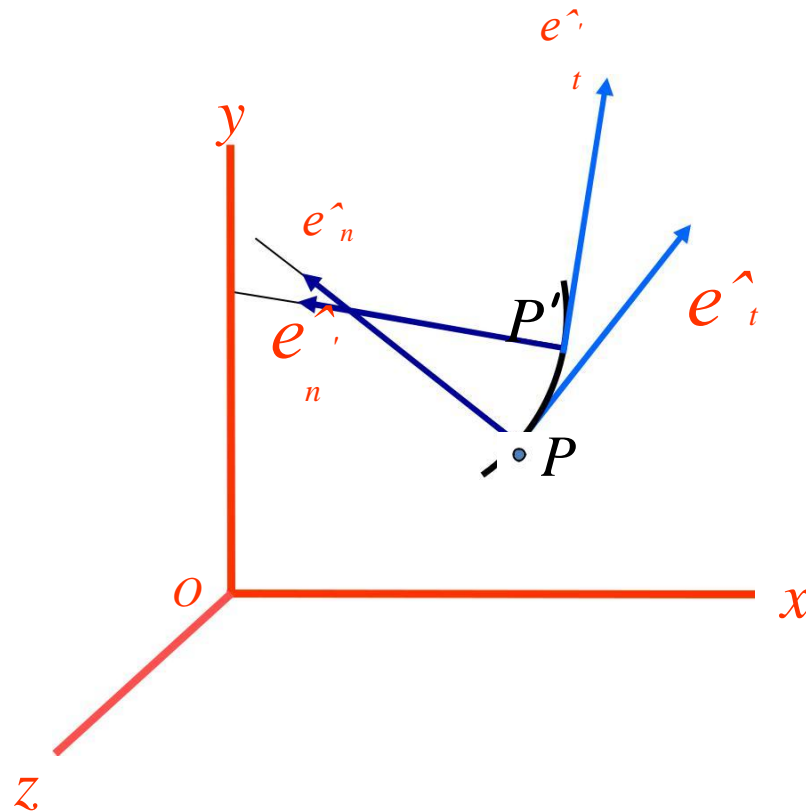


The equations are the same.

RADIAL AND TRANSVERSE COMPONENTS

Plane Motion

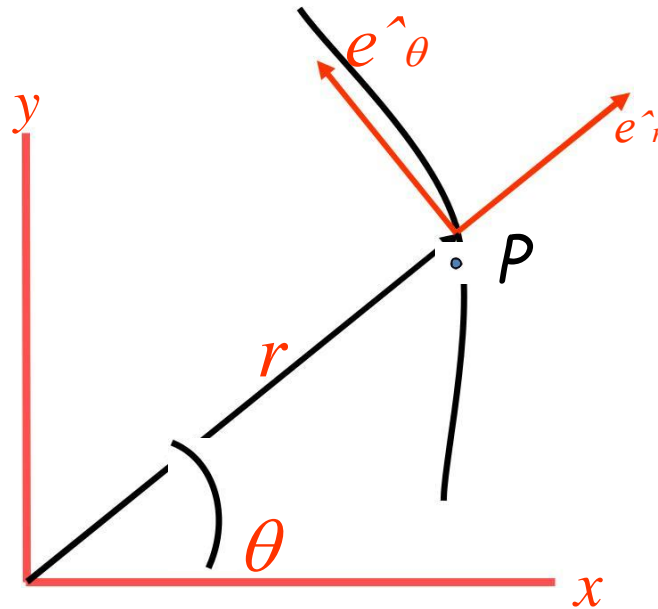

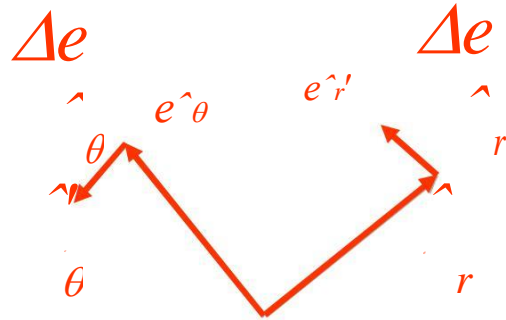


$$\frac{d\hat{e}_r}{d\theta} = \hat{e}_\theta$$

$$\frac{d\hat{e}_\theta}{d\theta} = -\hat{e}_r$$

$$\frac{d\hat{e}_r}{dt} = \frac{d\hat{e}_r}{d\theta} \frac{d\theta}{dt} = \dot{\theta} \hat{e}_\theta$$

$$\frac{d\hat{e}_\theta}{dt} = \frac{d\hat{e}_\theta}{d\theta} \frac{d\theta}{dt} = -\dot{\theta} \hat{e}_r$$

$$\begin{aligned}
 \mathbf{v} &= \frac{dr}{dt} \hat{\mathbf{e}}_r + r \frac{d\theta}{dt} \hat{\mathbf{e}}_\theta \\
 &= v_r \hat{\mathbf{e}}_r + v_\theta \hat{\mathbf{e}}_\theta \\
 v_r &= \frac{dr}{dt} \\
 v_\theta &= r \frac{d\theta}{dt}
 \end{aligned}$$

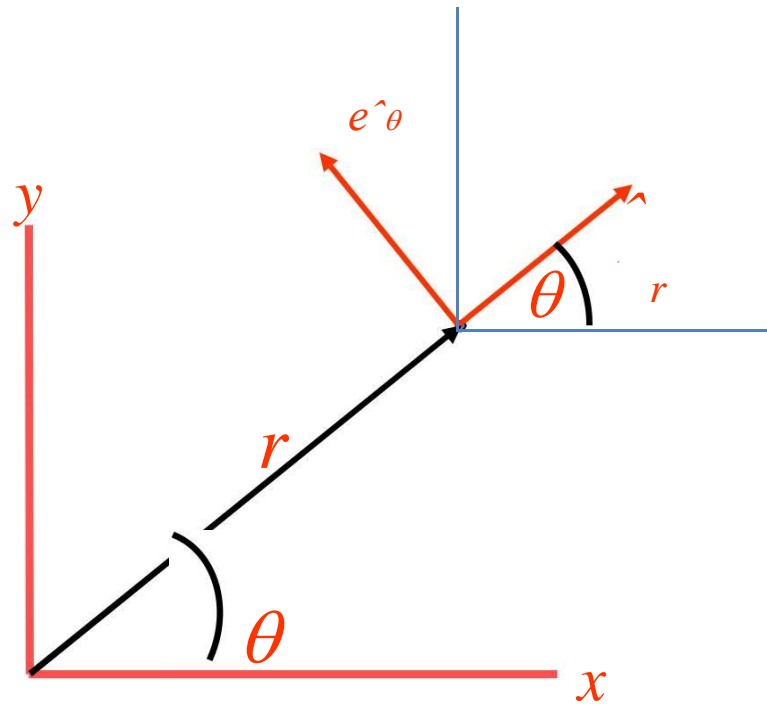

$$\hat{r} = i \cos \theta + j \sin \theta$$

$$\frac{d\hat{r}}{d\theta} = -i \sin \theta + j \cos \theta = \hat{e}_\theta$$

$$\frac{d\hat{e}_\theta}{d\theta} = -i \cos \theta - j \sin \theta = -\hat{r}$$

$$= \dot{\theta} \hat{e}_\theta$$

$$v = r\dot{\theta} \hat{e}_\theta$$

$$a = \frac{d}{dt}(r\dot{\theta} \hat{e}_\theta) = \dot{r}\dot{\theta} \hat{e}_\theta + r\ddot{\theta} \hat{e}_\theta + r\dot{\theta} \frac{d\hat{e}_\theta}{dt} + r\dot{\theta} \frac{d\hat{e}_\theta}{dt} + r\dot{\theta} \frac{d\hat{e}_\theta}{dt}$$

$$= \dot{r}\dot{\theta} \hat{e}_\theta + r\ddot{\theta} \hat{e}_\theta + r\dot{\theta} \hat{e}_\theta + r\dot{\theta} \hat{e}_\theta - r\dot{\theta}^2 \hat{e}_r$$

$$a = (\ddot{r} - r\dot{\theta}^2) \hat{e}_r + (r\ddot{\theta} + 2\dot{r}\dot{\theta}) \hat{e}_\theta$$

$$a_r = \ddot{r} - r\dot{\theta}^2$$

$$a_\theta = r\ddot{\theta} + 2\dot{r}\dot{\theta}$$

Note $a_r \neq \frac{dv_r}{dt}$ $a_\theta \neq \frac{dv_\theta}{dt}$


Extension to the Motion of a Particle in Space: Cylindrical Coordinates

$$r = R e_r + z k$$


$$v = R \dot{e}_R + R \dot{\theta} e_\theta + z \dot{k}$$

$$a = (R - R \dot{\theta}^2) e_R + (R \ddot{\theta} + 2 \dot{R} \dot{\theta}) e_\theta + z \ddot{k}$$

Curvilinear Motion: Position, Velocity & Acceleration

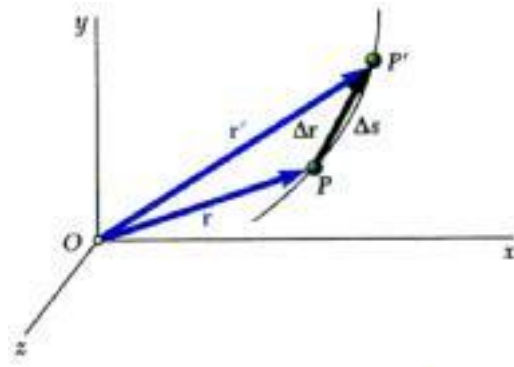

- *Position vector* of a particle at time t is defined by a vector between origin O of a fixed reference frame and the position occupied by particle.

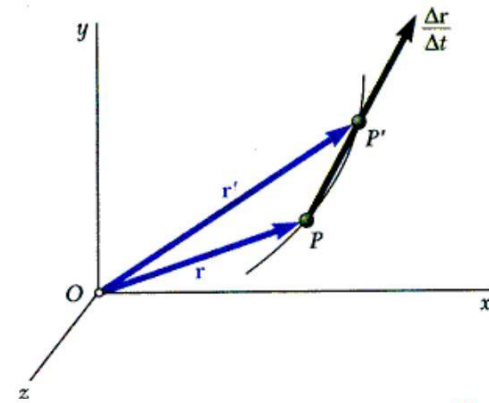


- Consider particle which occupies position P defined by r at time t and P' defined by r' at $t + \Delta t$,

$$v = \lim_{\Delta t \rightarrow 0} \frac{\Delta r}{\Delta t} = \frac{dr}{dt}$$


= instantaneous velocity (vector)

$$v = \lim_{\Delta t \rightarrow 0} \frac{\Delta s}{\Delta t} = \frac{ds}{dt}$$

= instantaneous speed (scalar)

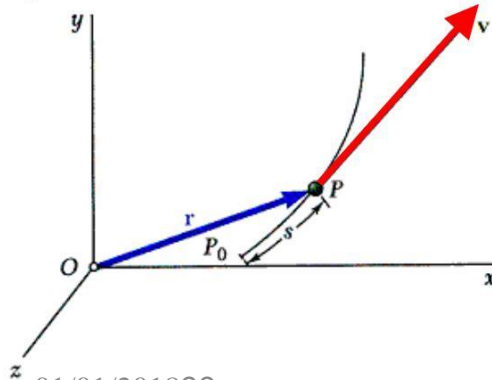

Curvilinear Motion: Position, Velocity & Acceleration

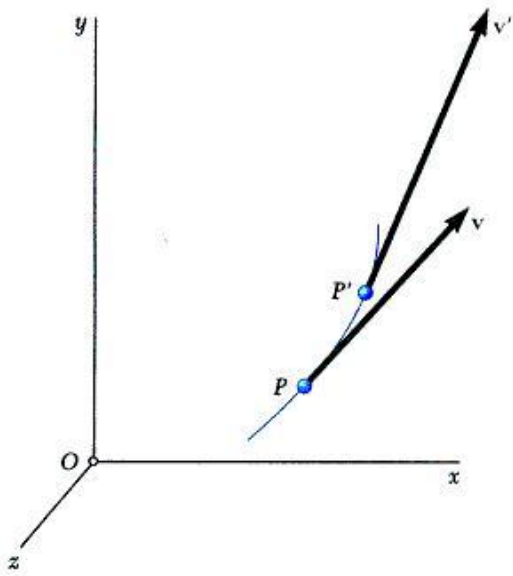


- Consider velocity

$\frac{dv}{dt}$ of particle at time t and velocity


$$\frac{dv}{dt}$$

= instantaneous acceleration (vector)

- In general, acceleration vector is not tangent to particle path and velocity vector.

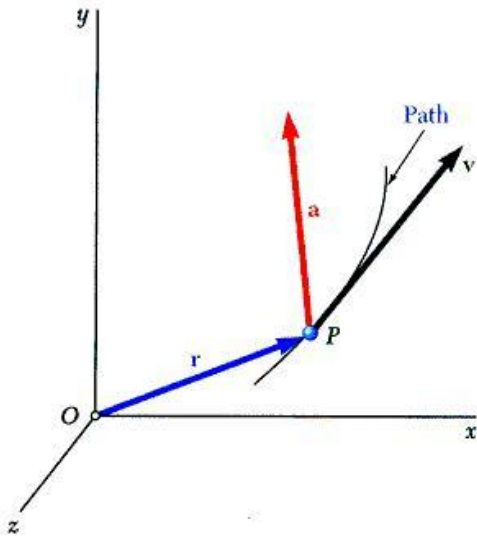

Rectangular Components of Velocity & Acceleration

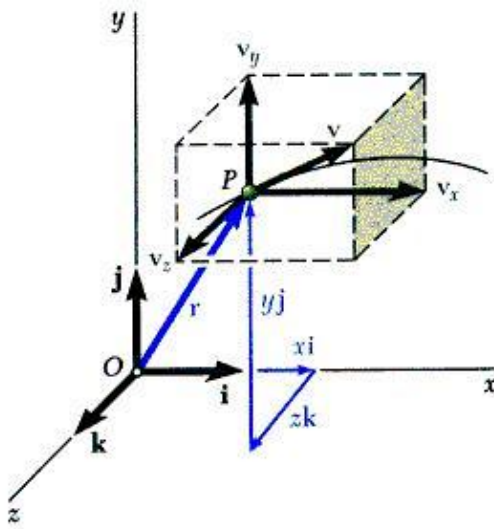

- Position vector of particle P given by its rectangular components:

$$r = xi + yj + zk$$

- Velocity vector,

$$v = \frac{dx}{dt}i + \frac{dy}{dt}j + \frac{dz}{dt}k = v_x i + v_y j + v_z k$$



$$= v_x i + v_y j + v_z k$$

- Acceleration vector,

$$a = \frac{d^2x}{dt^2}i + \frac{d^2y}{dt^2}j + \frac{d^2z}{dt^2}k = a_x i + a_y j + a_z k$$

$$= a_x i + a_y j + a_z k$$

Rectangular Components of Velocity & Acceleration

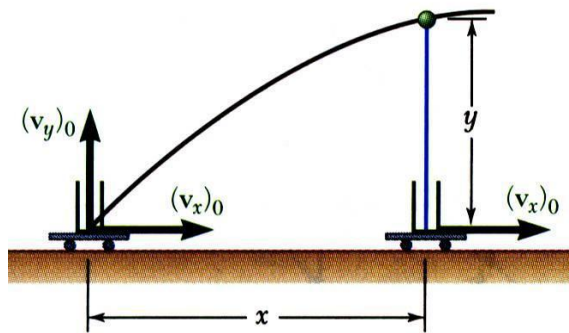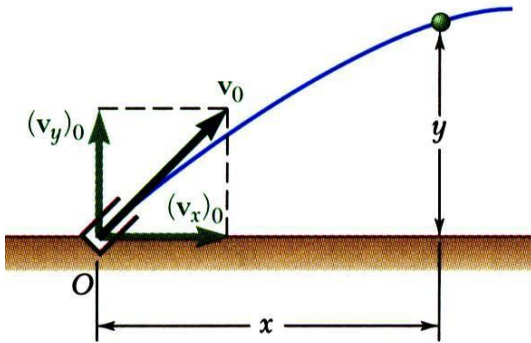

- Rectangular components are useful when acceleration components can be integrated independently, ex: motion of a **projectile**.

$$a_x = x = 0 \quad a_y = y = -g \quad a_z = z = 0$$

with initial conditions,

$$x_0 = y_0 = z_0 = 0 \quad \left(v_x \right)_0 = \left(v_y \right)_0 = \text{given}$$

Therefore:

$$v_x = \left(v_x \right)_0 \quad v_y = \left(v_y \right)_0 - gt$$

$$x = \left(v_x \right)_0 t \quad y = \left(v_y \right)_0 t - \frac{1}{2} gt^2$$

- Motion in horizontal direction is uniform.
- Motion in vertical direction is uniformly accelerated.
- Motion of projectile could be replaced by two independent rectilinear motions.

Example


A projectile is fired from the edge of a 150-m cliff with an initial velocity of 180 m/s at an angle of 30° with the horizontal. Find (a) the range, and (b) maximum height.

Remember:

$$v = v_0 + at$$


$$x = x_0 + v_0 t + \frac{1}{2} at^2$$

$$v^2 = v_0^2 + 2a(x - x_0)$$

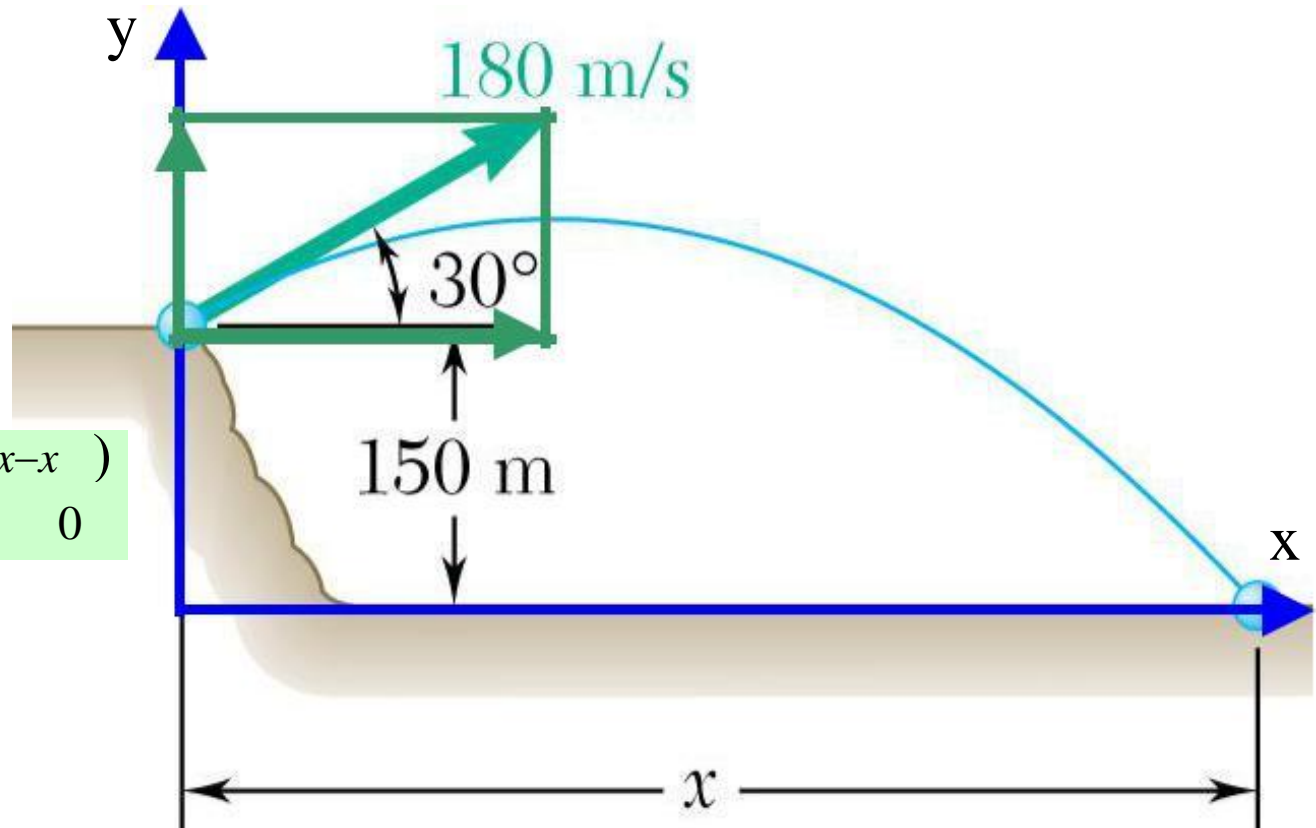


Example

Car A is traveling at a constant speed of 36 km/h. As A crosses intersection, B starts from rest 35 m north of intersection and moves with a constant acceleration of 1.2 m/s^2 . Determine the speed, velocity and acceleration of B relative to A 5 seconds after A crosses intersection.

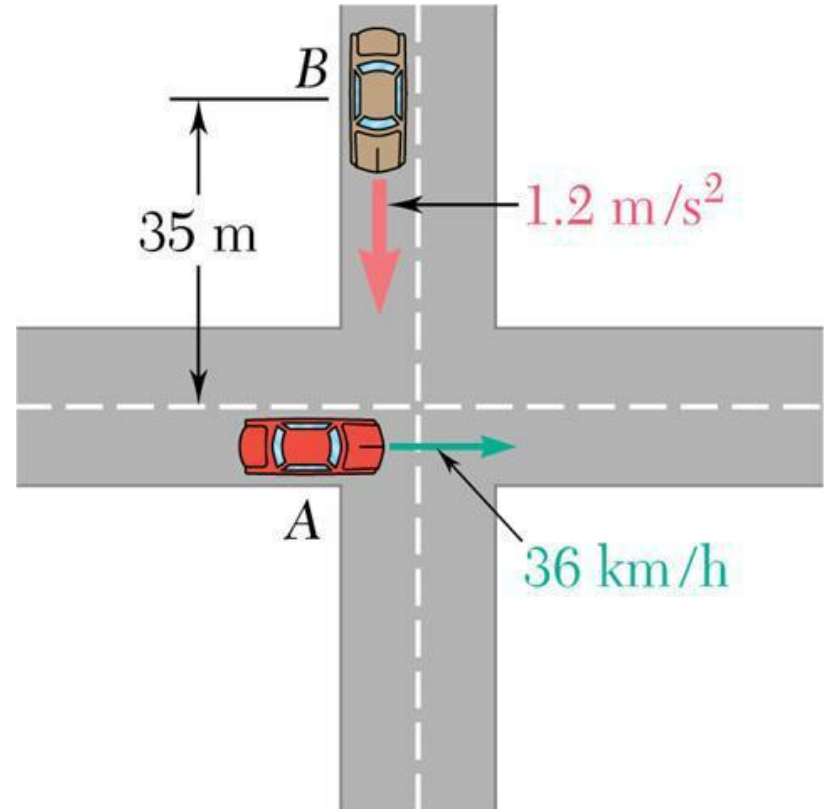


Tangential and Normal Components

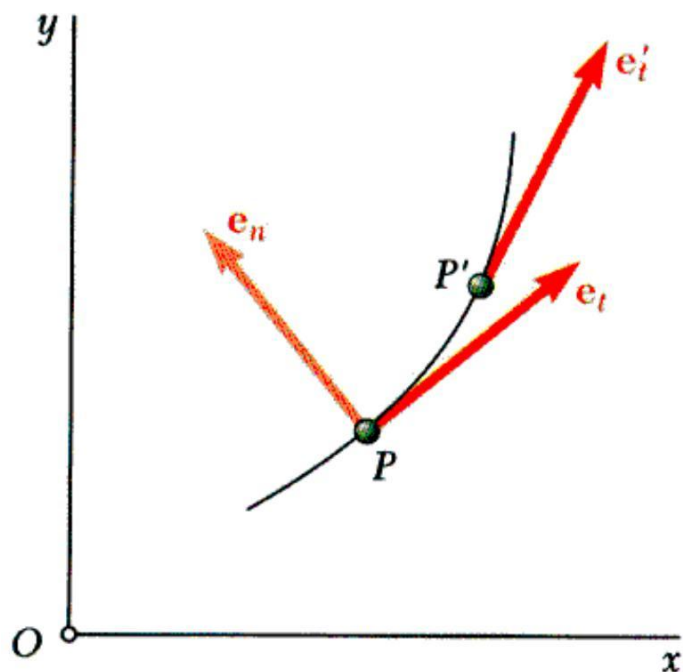

- Velocity vector of particle is tangent to path of particle. In general, acceleration vector is not. Wish to express acceleration vector in terms of **tangential** and **normal** components.

- e_t and e'_t are **tangential** unit vectors for the particle path at P and P' . When drawn with respect to the same origin,




$$\vec{e}'_t = \vec{e}_t + d\vec{e}_t$$

From geometry:



$$de_t = d\theta$$

$$de_t = d\theta e_n$$

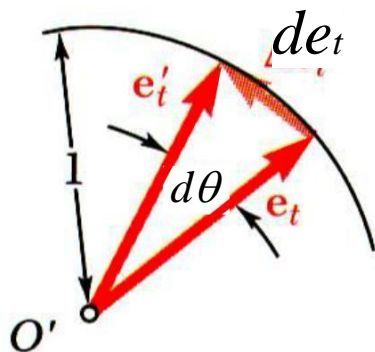

$$\frac{d\vec{e}_t}{d\theta} = \vec{e}_n$$

Tangential and Normal Components

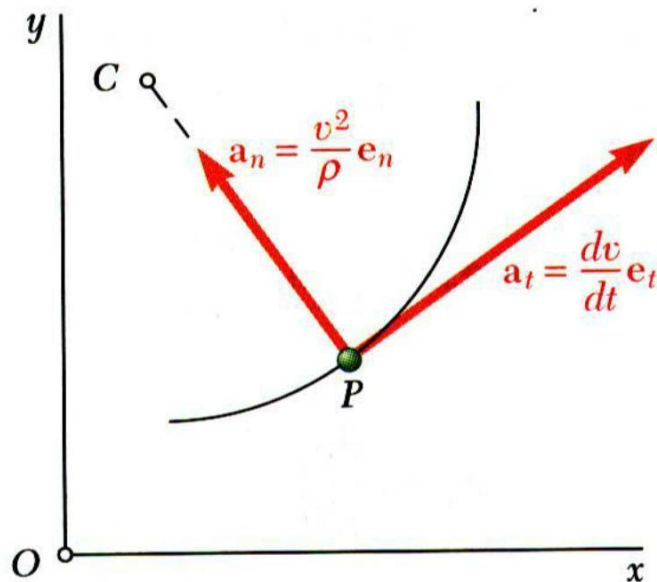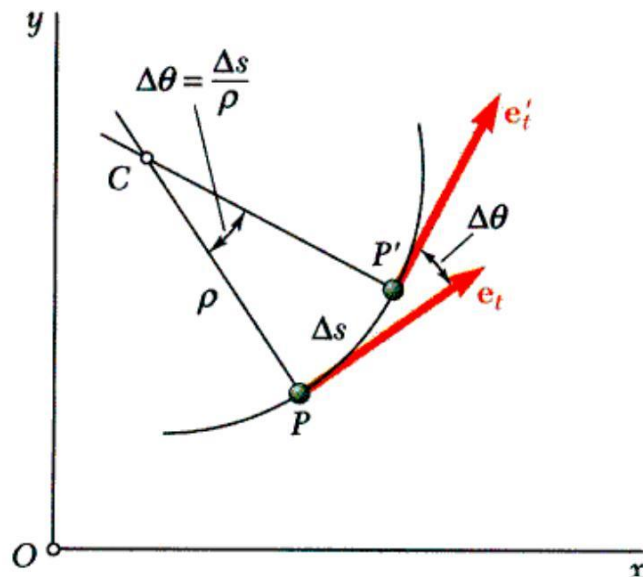

- With the velocity vector expressed as $\vec{v} = v \vec{e}_t$ the particle acceleration may be written as

$$\vec{a} = \frac{d\vec{v}}{dt} = \frac{dv}{dt} \vec{e}_t + v \frac{d\vec{e}_t}{dt} = \frac{dv}{dt} \vec{e}_t + v \frac{d\vec{e}_t}{d\theta} \frac{d\theta}{ds} \frac{ds}{dt}$$

but


$$\frac{d\vec{e}_t}{d\theta} = \vec{e}_n \quad \rho d\theta = ds \quad \frac{ds}{dt} = v$$

After substituting,

$$\vec{a} = \frac{dv}{dt} \vec{e}_t + \frac{v^2}{\rho} \vec{e}_n \quad \vec{a} = \frac{dv}{dt} \vec{e}_t + \frac{v^2}{\rho} \vec{e}_n$$

- Tangential component of acceleration reflects change of speed and normal component reflects change of direction.
- Tangential component may be positive or negative. Normal component always points toward center of path curvature.

Radial and Transverse Components

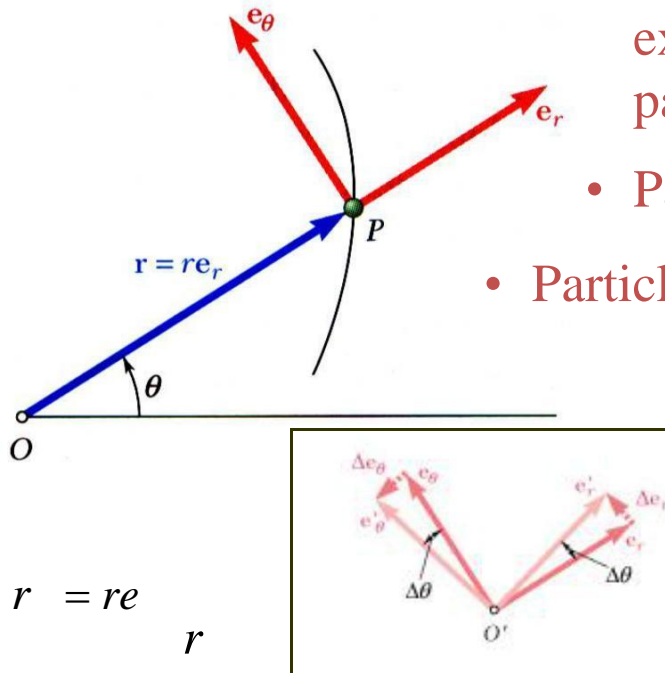

- If particle position is given in **polar coordinates**, we can express velocity and acceleration with components parallel and perpendicular to OP .

- Particle position vector: $\vec{r} = r\vec{e}_r$

- Particle velocity vector: $\vec{v} = \frac{d}{dt}(r\vec{e}_r) = \frac{dr}{dt}\vec{e}_r + r\frac{d\vec{e}_r}{dt}$

$$\vec{v} = \frac{dr}{dt}\vec{e}_r + r\frac{d\theta}{dt}\vec{e}_\theta = \dot{r}\vec{e}_r + r\dot{\theta}\vec{e}_\theta$$

- Similarly, particle acceleration:

$$\begin{aligned}\vec{a} &= \frac{d}{dt}(\dot{r}\vec{e}_r + r\dot{\theta}\vec{e}_\theta) \\ &= \ddot{r}\vec{e}_r + \dot{r}\frac{d\vec{e}_r}{dt} + \dot{\theta}\vec{e}_\theta + r\ddot{\theta}\vec{e}_\theta + r\dot{\theta}\frac{d\vec{e}_\theta}{dt} \\ &= \ddot{r}\vec{e}_r + \dot{r}\dot{\theta}\vec{e}_\theta + \ddot{\theta}r\vec{e}_\theta + r\dot{\theta}^2(-\vec{e}_r) + r\ddot{\theta}\vec{e}_\theta + r\dot{\theta}\frac{d\vec{e}_\theta}{dt}\end{aligned}$$


$$\vec{a} = (\ddot{r} - r\dot{\theta}^2)\vec{e}_r + (r\ddot{\theta} + 2\dot{r}\dot{\theta})\vec{e}_\theta$$

$$\frac{d\vec{e}_r}{d\theta} = \vec{e}_\theta \quad \frac{d\vec{e}_\theta}{d\theta} = -\vec{e}_r$$

$$\frac{d\vec{e}_r}{dt} = \frac{d\vec{e}_r}{d\theta} \frac{d\theta}{dt} = \vec{e}_\theta \frac{d\theta}{dt}$$

$$\frac{d\vec{e}_\theta}{dt} = \frac{d\vec{e}_\theta}{d\theta} \frac{d\theta}{dt} = -\vec{e}_r \frac{d\theta}{dt}$$


Sample Problem

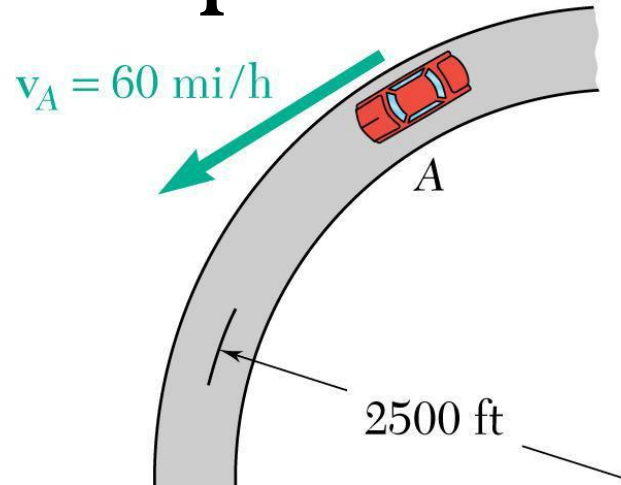

A motorist is traveling on curved section of highway at 60 mph. The motorist applies brakes causing a constant deceleration.

Knowing that after 8 s the speed has been reduced to 45 mph, determine the acceleration of the automobile immediately after the brakes are applied.

Sample Problem

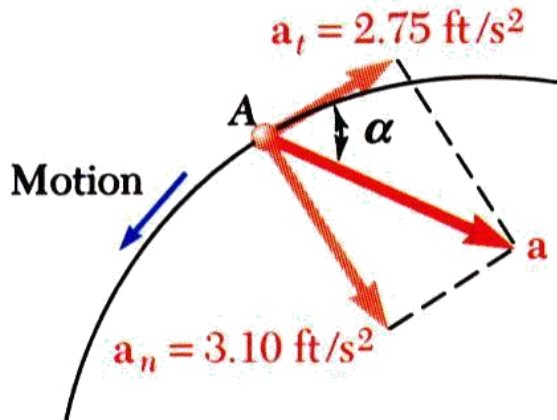

$$60 \text{ mph} = 88 \text{ ft/s}$$

$$45 \text{ mph} = 66 \text{ ft/s}$$

SOLUTION:

- Calculate tangential and normal components of acceleration.

$$a_t = \frac{\Delta v}{\Delta t} = \frac{(66 - 88) \text{ ft/s}}{8 \text{ s}} = -2.75 \frac{\text{ft}}{\text{s}^2}$$

$$a_n = \frac{v^2}{\rho} = \frac{(88 \text{ ft/s})^2}{2500 \text{ ft}} = 3.10 \frac{\text{ft}}{\text{s}^2}$$

- Determine acceleration magnitude and direction with respect to tangent to curve.

$$a = \sqrt{a_t^2 + a_n^2} = \sqrt{(-2.75)^2 + 3.10^2}$$

$$a = 4.14 \frac{\text{ft}}{\text{s}^2}$$

$$\alpha = \tan^{-1} \frac{a_n}{a_t} = \tan^{-1} \frac{3.10}{2.75}$$

$$\alpha = 48.4^\circ$$

Sample Problem


Determine the minimum radius of curvature of the trajectory described by the projectile.

Recall:

$$a_n = \frac{v^2}{\rho}$$




$$\rho = \frac{v^2}{a_n}$$

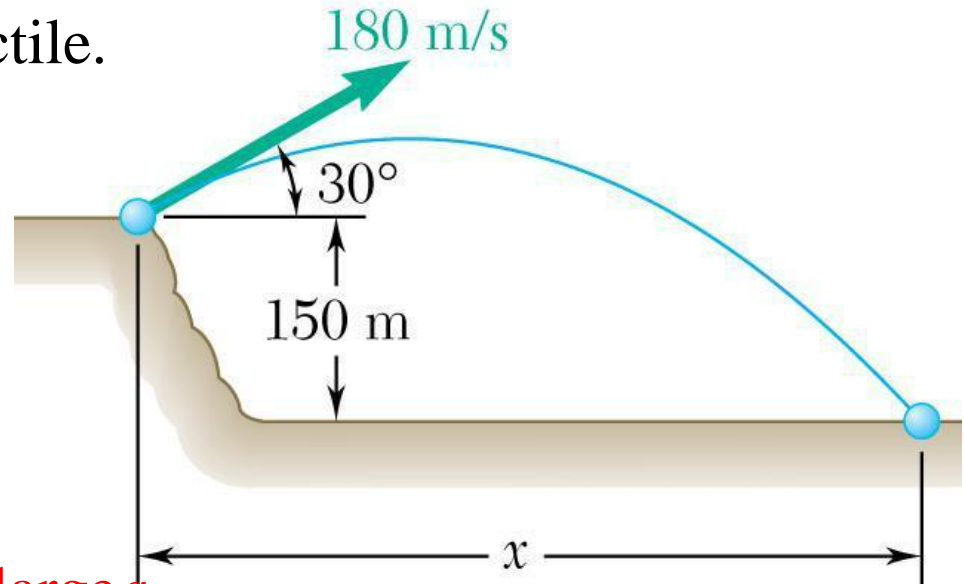


Minimum ρ , occurs for small v and large a_n

$$\rho = \frac{(155.9)^2}{9.81} = 2480$$

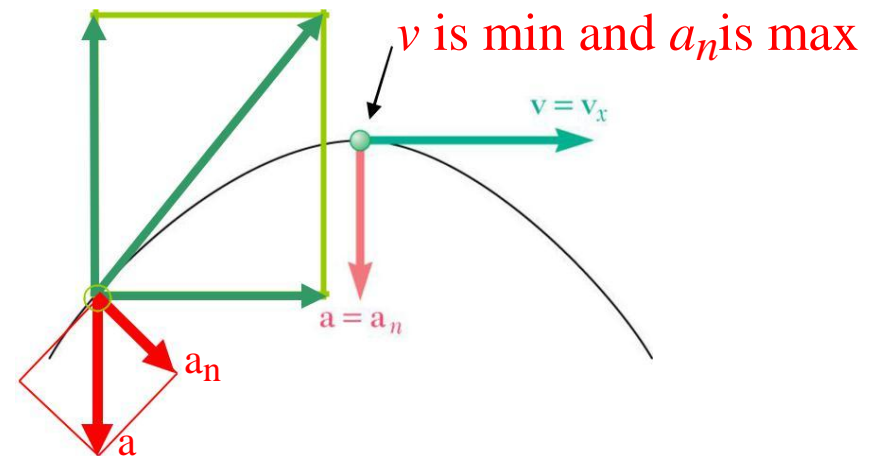


Sample Problem

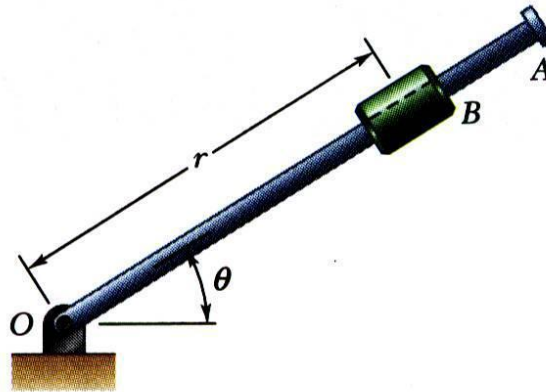

Rotation of the arm about O is defined by $\theta = 0.15t^2$ where θ is in radians and t in seconds. Collar B slides along the arm such that $r = 0.9 - 0.12t^2$ where r is in meters.

After the arm has rotated through 30° , determine (a) the total velocity of the collar, (b) the total acceleration of the collar, and (c) the relative acceleration of the collar with respect to the arm.

Sample Problem

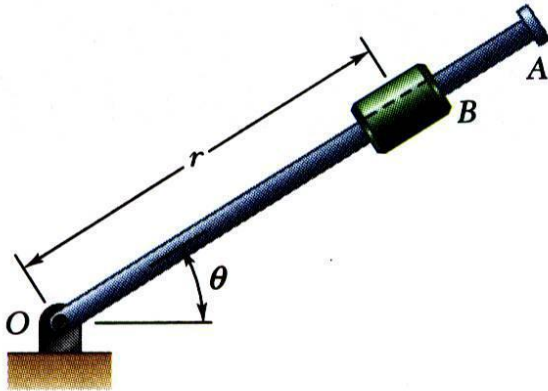

SOLUTION:

- Evaluate time t for $\theta = 30^\circ$.

$$\theta = 0.15t^2$$

$$= 30^\circ = 0.524 \text{ rad} \quad t = 1.869 \text{ s}$$

- Evaluate radial and angular positions, and first and second derivatives at time t .

$$r = 0.9 - 0.12t^2 = 0.481 \text{ m}$$

$$\dot{r} = -0.24t = -0.449 \text{ m/s}$$

$$\ddot{r} = -0.24 \text{ m/s}^2$$


$$\theta = 0.15t^2 = 0.524 \text{ rad}$$

$$\dot{\theta} = 0.30t = 0.561 \text{ rad/s}$$

$$\ddot{\theta} = 0.30 \text{ rad/s}^2$$

Sample Problem

- Calculate velocity and acceleration.

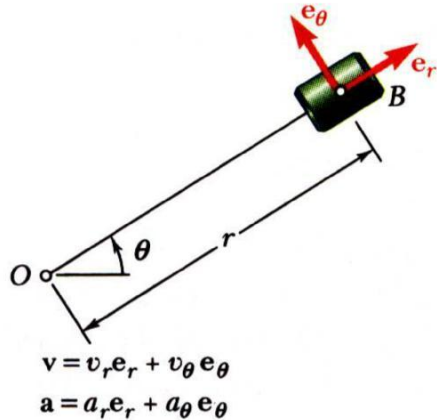

$$v_r = \dot{r} = -0.449 \text{ m/s}$$

$$v_\theta = r\dot{\theta} = (0.481 \text{ m})(0.561 \text{ rad/s}) = 0.270 \text{ m/s}$$

$$v = \sqrt{v_r^2 + v_\theta^2} \quad \beta = \tan^{-1} \frac{v_\theta}{v_r}$$

$$v = 0.524 \text{ m/s} \quad \beta = 31.0^\circ$$

$$a_r = \ddot{r} - r\dot{\theta}^2$$

$$= -0.240 \text{ m/s}^2 - (0.481 \text{ m})(0.561 \text{ rad/s})^2$$

$$= -0.391 \text{ m/s}^2$$



$$a_\theta = r\ddot{\theta} + 2\dot{r}\dot{\theta}$$

$$= (0.481 \text{ m})(0.3 \text{ rad/s}^2) + 2(-0.449 \text{ m/s})(0.561 \text{ rad/s})$$

$$= -0.359 \text{ m/s}^2$$

$$a = \sqrt{a_r^2 + a_\theta^2} \quad \gamma = \tan^{-1} \frac{a_\theta}{a_r}$$


$$a = 0.531 \text{ m/s}^2 \quad \gamma = 42.6^\circ$$

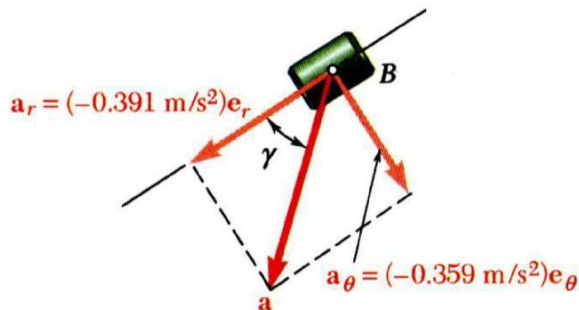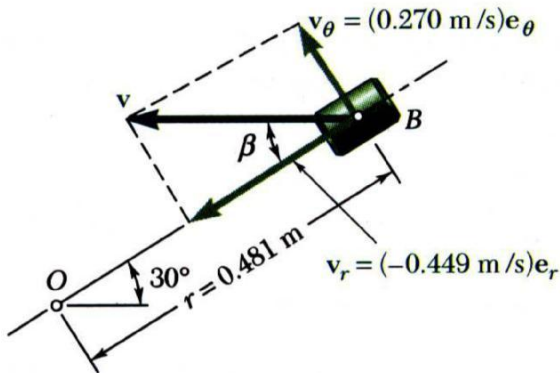


Sample Problem

- Evaluate acceleration with respect to arm.

Motion of collar with respect to arm is rectilinear and defined by coordinate r .

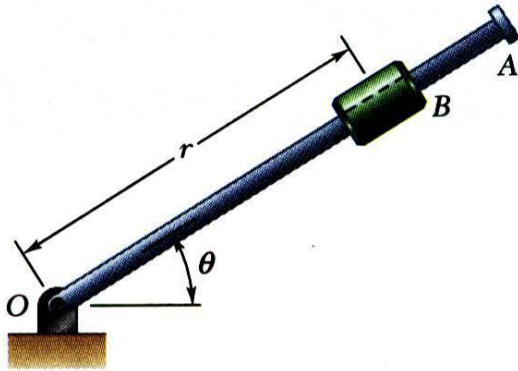

$$a_{B/OA} = r = -0.240 \text{ m/s}^2$$

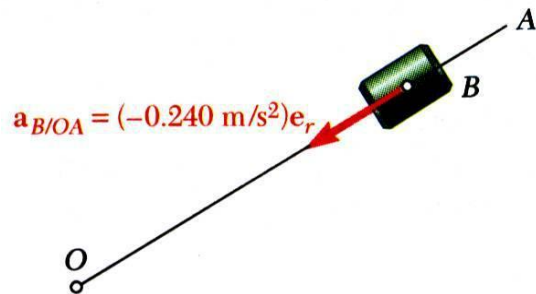


UNIT-II

KINETICS OF PARTICLE

Introduction, definitions of matter, body, particle, mass, weight, inertia, momentum, Newton's law of motion, relation between force and mass, motion of a particle in rectangular coordinates, D'Alembert's principle, motion of lift, motion of body on an inclined plane, motion of connected bodies.

Newton's Second Law of Motion

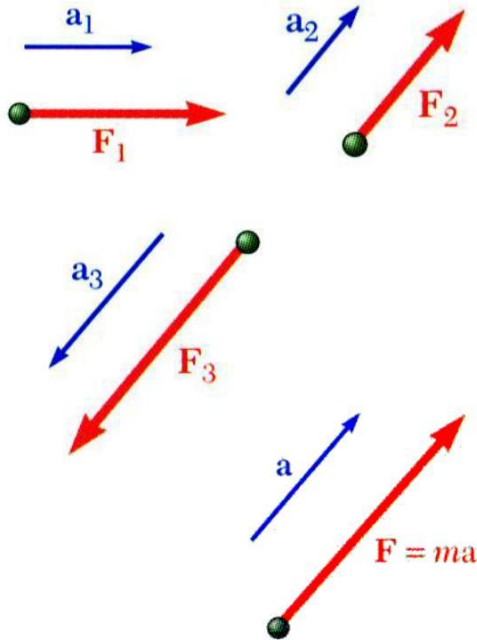

- If the resultant force acting on a particle is not zero, the particle will have an acceleration proportional to the magnitude of resultant and in the direction of the resultant.


$$\vec{F} = m\vec{a}$$

- If particle is subjected to several forces:

$$\sum \vec{F} = m\vec{a}$$

- We must use a Newtonian frame of reference, i.e., one that is not accelerating or rotating.
- If no force acts on particle, particle will not accelerate, i.e., it will remain stationary or continue on a straight line at constant velocity.

Linear Momentum of a Particle

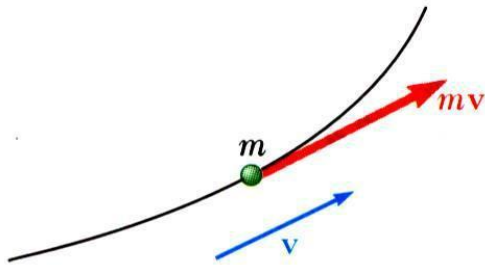

$$\begin{aligned}\sum \vec{F} &= m\vec{a} = m \frac{d\vec{v}}{dt} \\ &= \frac{d}{dt}(m\vec{v}) = \frac{d}{dt}(\vec{L})\end{aligned}$$

$$\vec{L} = m\vec{v} \quad \text{Linear momentum}$$

➡ Sum of forces = rate of change of linear momentum

If $\sum \vec{F} = 0$ ➡ linear momentum is constant

$$\sum \vec{F} = \dot{\vec{L}}$$

Principle of conservation of linear momentum

Equations of Motion =

- Newton's second law

$$\sum \mathbf{F} = m\mathbf{a}$$

- Convenient to resolve into components:

$$\sum \left(F_x \mathbf{i} + F_y \mathbf{j} + F_z \mathbf{k} \right) = m \left(a_x \mathbf{i} + a_y \mathbf{j} + a_z \mathbf{k} \right)$$




$$\sum F_x = ma_x \quad \sum F_y = ma_y \quad \sum F_z = ma_z$$

$$F_x = m a_x \quad F_y = m a_y \quad F_z = m a_z$$

- For tangential and normal components:

$$\sum F_t = ma_t \quad \sum F_n = ma_n$$

$$\sum F_t = m \frac{dv}{dt} \quad \sum F_n = m \frac{v^2}{\rho}$$

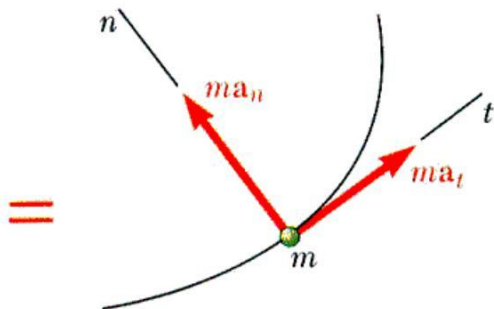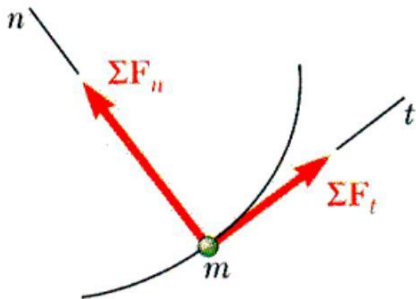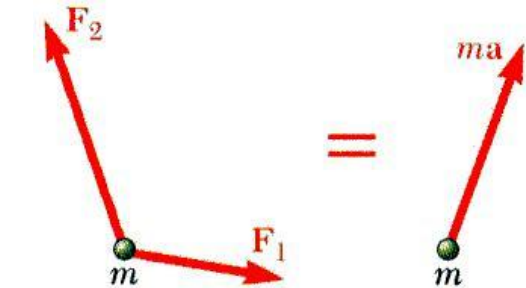


Dynamic Equilibrium


- Alternate expression of Newton's law:

$$\sum \vec{F} - m\vec{a} = 0$$

$-m\vec{a} \rightarrow$ inertia vector

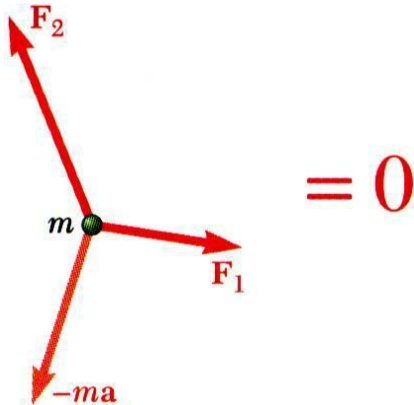


- If we include inertia vector, the system of forces acting on particle is equivalent to zero. The particle is said to be in *dynamic equilibrium*.

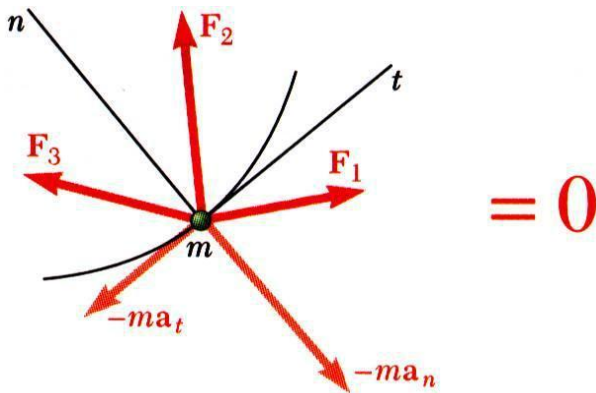

- Inertia vectors are often called *inertia forces* as they measure the resistance that particles offer to changes in motion.

Sample Problem 1

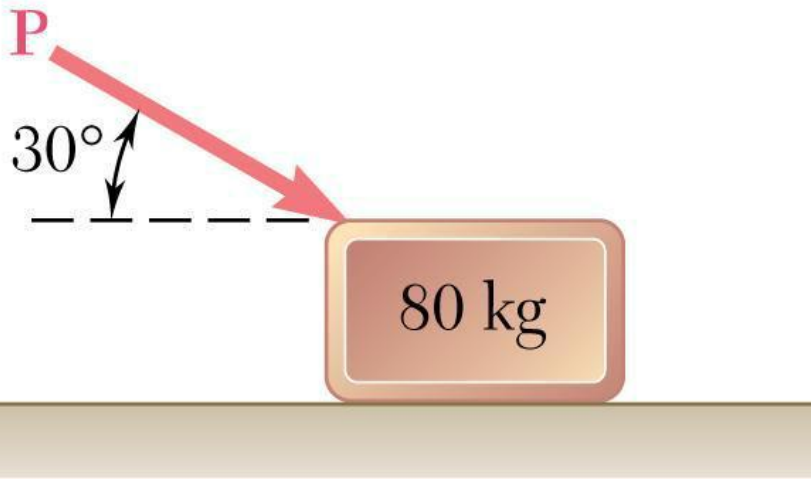


SOLUTION:

- Draw a free body diagram
- Apply Newton's law. Resolve into rectangular components

An 80-kg block rests on a horizontal plane. Find the magnitude of the force **P** required to give the block an acceleration of 2.5 m/s^2 to the right. The coefficient of kinetic friction between the block and plane is $m_k = 0.25$.

Sample Problem 12.2

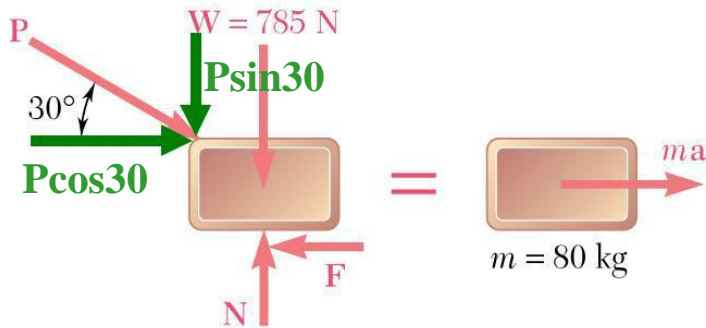

$$W = mg = 80 \times 9.81 = 785 \text{ N}$$

$$F = \mu_k N = 0.25 N$$

$$\sum F_x = ma :$$

$$P \cos 30^\circ - 0.25 N = (80)(2.5) = 200$$

$$\sum F_y = 0 :$$

$$N - P \sin 30^\circ - 785 = 0$$

Solve for P and N



$$N = P \sin 30^\circ + 785$$

$$P \cos 30^\circ - 0.25 (P \sin 30^\circ + 785) = 200$$

$$P = 534.7 \quad N$$


$$N = 1052.4 \quad N$$

Sample Problem 12.3

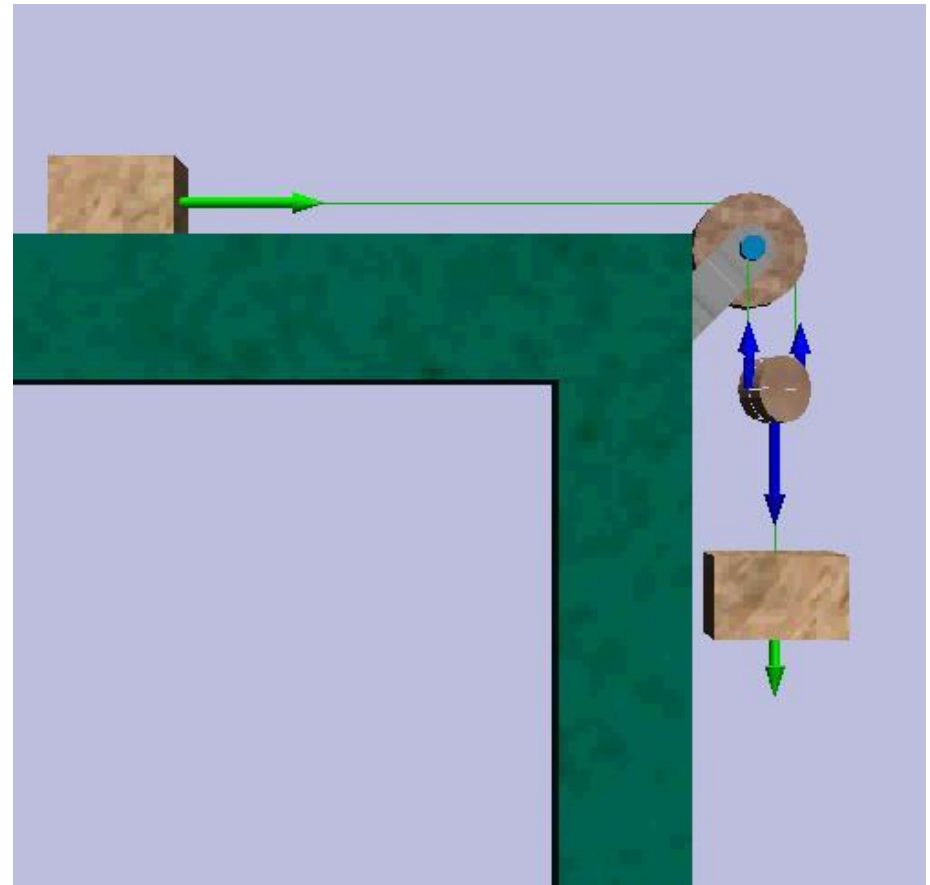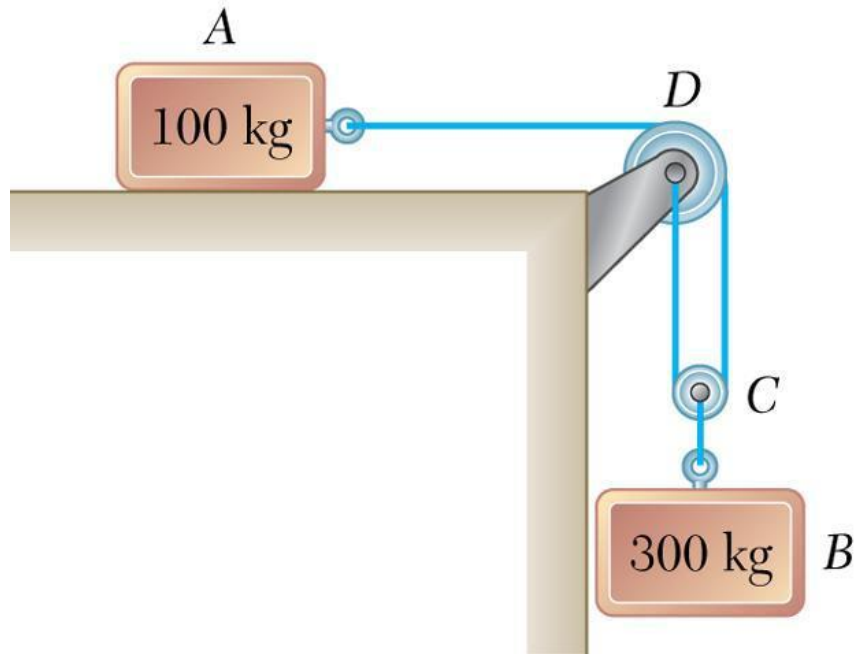

The two blocks shown start from rest. The horizontal plane and the pulley are frictionless, and the pulley is assumed to be of negligible mass. Determine the acceleration of each block and the tension in


Sample Problem 2

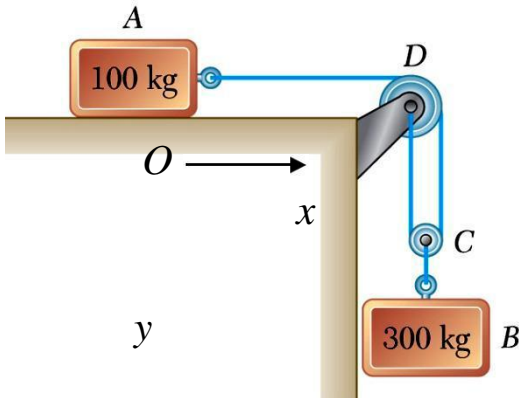

- Kinematic relationship: If A moves x_A to the right, B moves down $0.5 x_A$

$$x_A = 2x_B$$

Draw free body diagrams & apply Newton's law:

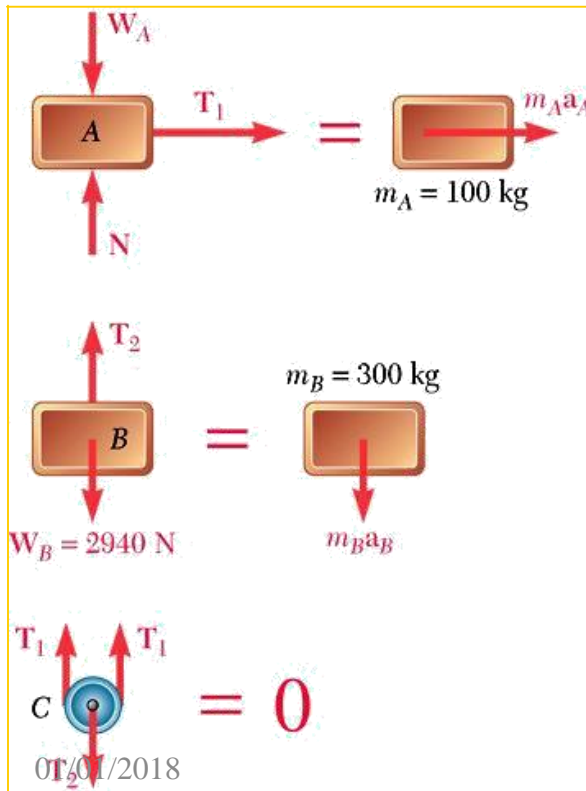

$$\sum_x F = m a \quad \rightarrow \quad T_1 = 100 a_A$$

$$\sum_y F = m a \quad \rightarrow \quad m_B g - T_2 = m_B a_B$$

$$300 \times 9.81 - T_2 = (300) a_B$$

$$T_2 = 2940 - (300) a_B$$

$$\sum_y F = m a \quad \rightarrow \quad T_2 - 2T_1 = 0$$

$$2940 - (300) a_B - 2T_1 = 0$$

$$2940 - (300) a_B - 200 a_A = 0$$

$$2940 - (300) a_B - 2 \times 200 a_B = 0$$



$$a_B = 4.2 \text{ m/s}^2$$

$$a_A = 8.4 \text{ m/s}^2$$

$$T_1 = 840 \text{ N}$$

$$T_2 = 1680 \text{ N}$$




Sample Problem 3

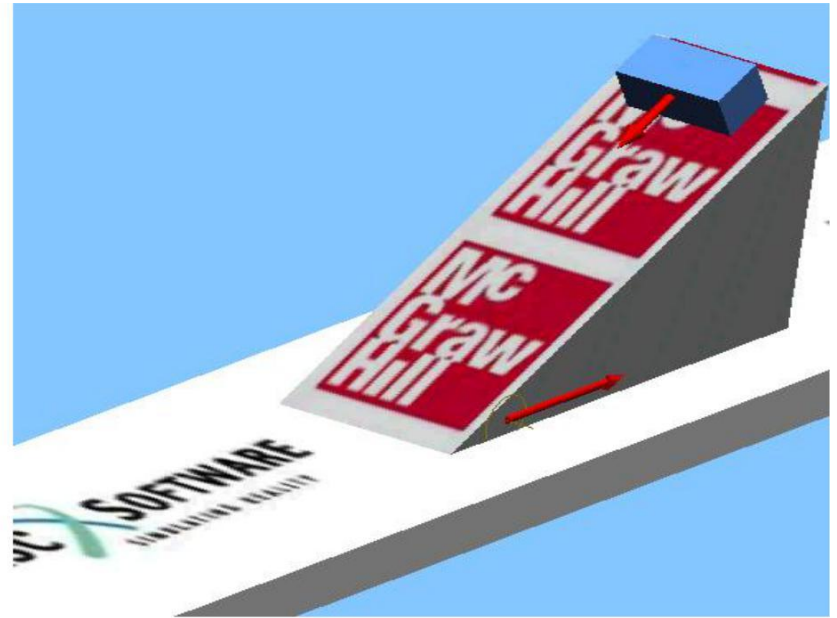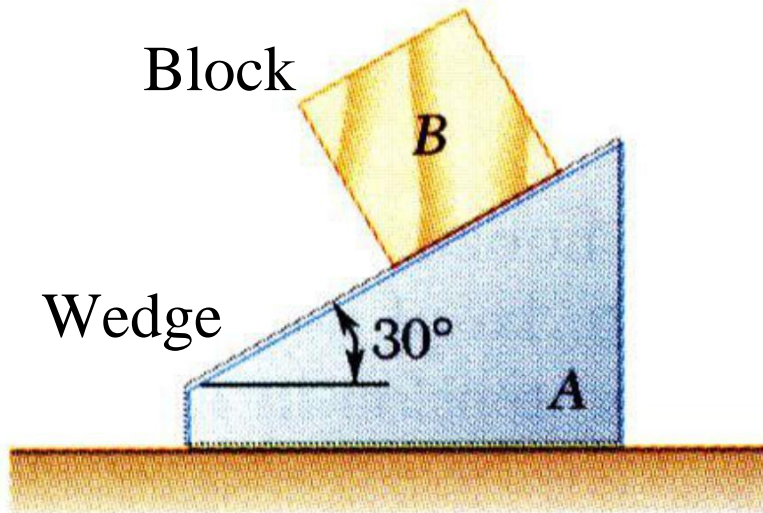

The 12-lb block *B* starts from rest and slides on the 30-lb wedge *A*, which is supported by a horizontal surface.

Neglecting friction, determine (*a*) the acceleration of the wedge, and (*b*) the acceleration of the block relative to the wedge.

Draw free body diagrams for block & wedge

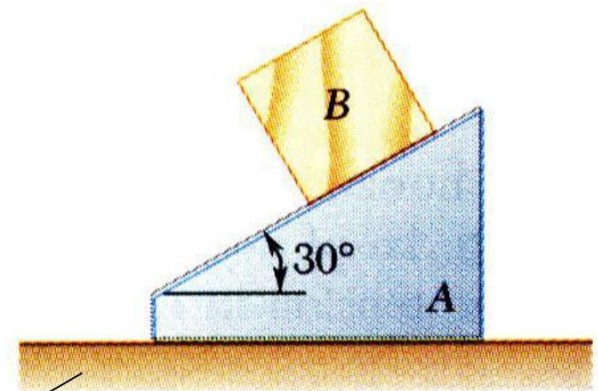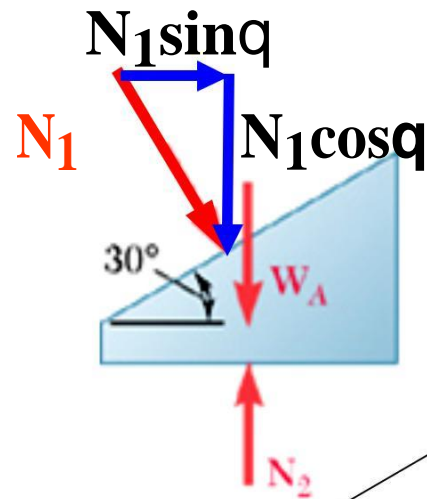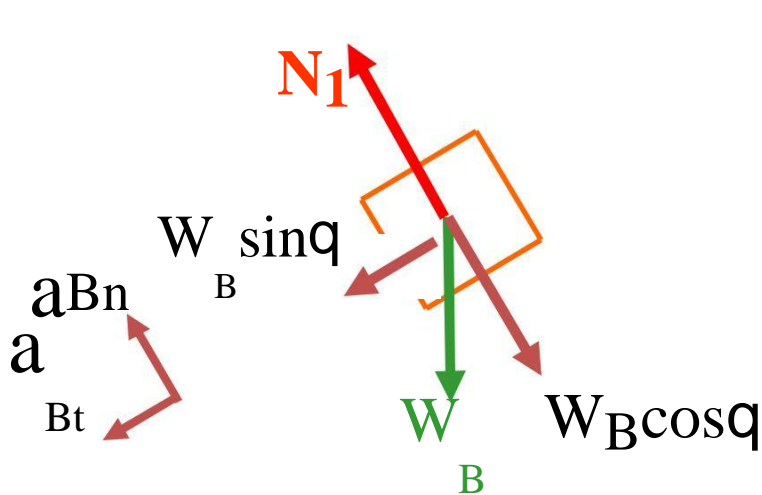

$$W_B \sin \theta = m_B a_{Bt}$$

$$12 \times 0.5 = \frac{12}{32.2} a_{Bt} \Rightarrow a_{Bt} = 16.1 \text{ ft/s}^2$$

$$N_1 - W_B \cos \theta = m_B a_{Bn}$$

$$N_1 \sin \theta = m_A a_A$$

$$N_1 \cos \theta + W_A = N_2$$

$$0.5N = \frac{30}{32.2} a_A$$

But $a_{Bn} = -a_A \sin \theta$


$$N_1 - W_B \cos \theta = -m_B a_A \sin \theta$$

Same normal acceleration (to maintain contact)

$$N_1 - 10.39 = -\frac{12 \times 0.5}{32.2} a_A$$

$$a_A = 5.08 \text{ ft/s}^2$$

$$a_{Bn} = -2.54 \text{ ft/s}^2$$

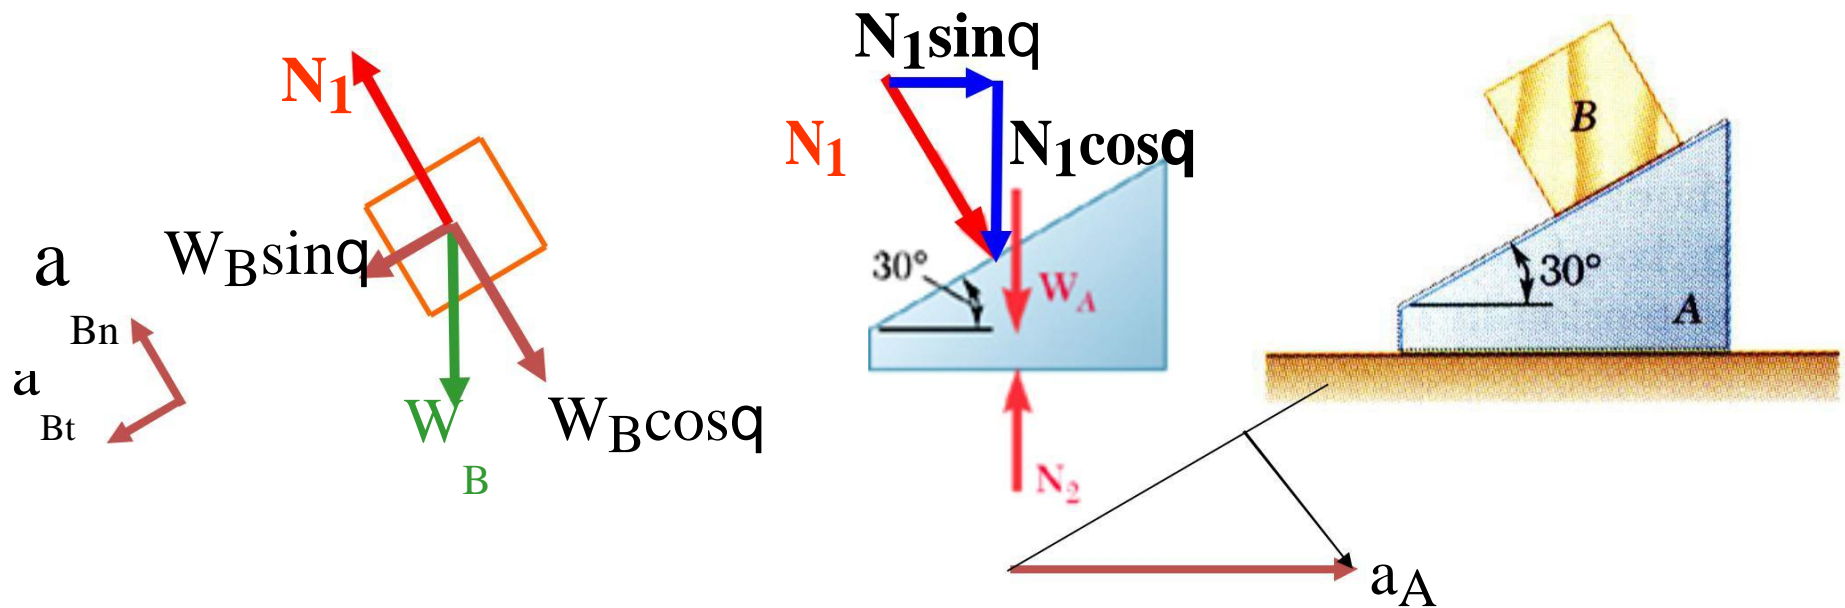


$$a_{Bx} = -a_{Bt} \cos \theta - a_{Bn} \sin \theta = -12.67 \text{ ft} / \text{s}^2$$


$$a_{By} = -a_{Bt} \sin \theta + a_{Bn} \cos \theta = -10.25 \text{ ft} / \text{s}^2$$

$$\vec{a}_{B/A} = (-12.67 \vec{i} - 10.25 \vec{j}) - (5.08 \vec{i} - 20.5 \vec{j}) = -17.75 \vec{i} + 10.25 \vec{j}$$

$$\vec{a}_{B/A} = \vec{a}_B - \vec{a}_A$$




Sample Problem 4

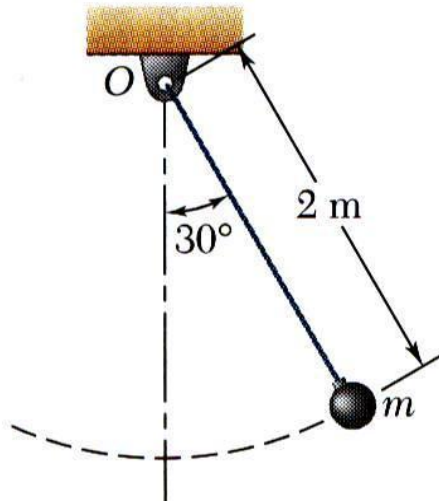

The bob of a 2-m pendulum describes an arc of a circle in a vertical plane. If the tension in the cord is 2.5 times the weight of the bob for the position shown, find the velocity and acceleration of the bob in that position.

Sample Problem 5

Resolve into tangential and normal components:

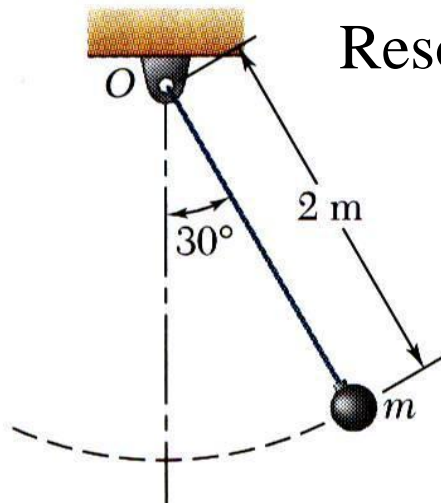

$$\sum F_t = ma_t: \quad mg \sin 30^\circ = ma_t$$


$$a_t = g \sin 30^\circ$$

$$a_t = 4.9 \text{ m/s}^2$$

$$\sum F_n = ma_n: \quad 2.5mg - mg \cos 30^\circ = ma_n$$

$$a_n = g(2.5 - \cos 30^\circ)$$

$$a_n = 16.03 \text{ m/s}^2$$

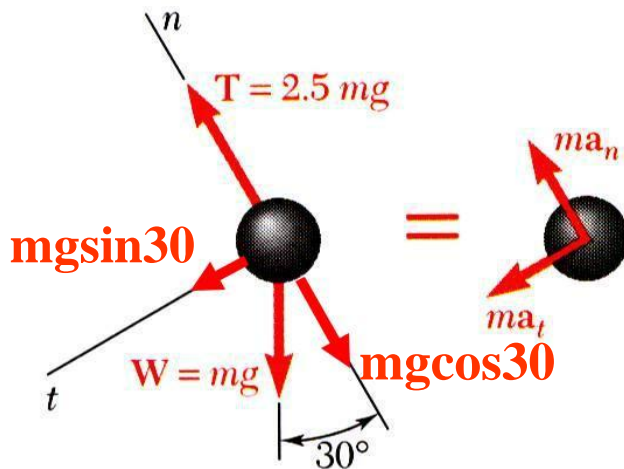


- Solve for velocity in terms of normal acceleration.

$$a_n = \frac{v^2}{\rho} \quad v = \sqrt{\rho a_n} = \sqrt{(2 \text{ m})(16.03 \text{ m/s}^2)}$$

$$v = \pm 5.66 \text{ m/s}$$

Sample Problem 6

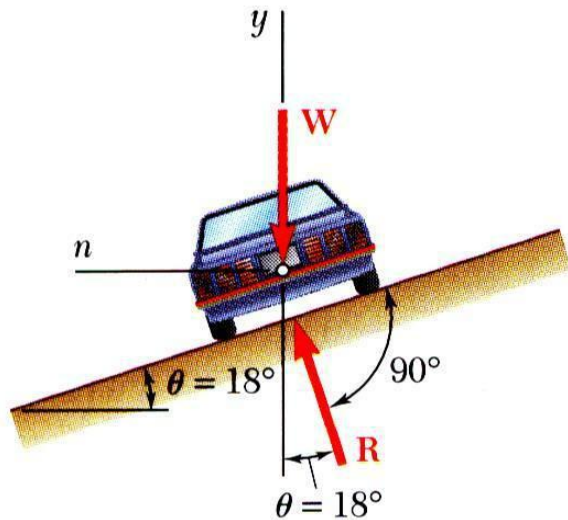


Determine the rated speed of a highway curve of radius $\rho = 400$ ft banked through an angle $\theta = 18^\circ$. The rated speed of a banked highway curve is the speed at which a car should travel if no lateral friction force is to be exerted at its wheels.

SOLUTION:

- The car travels in a horizontal circular path with a normal component of acceleration directed toward the center of the path. The forces acting on the car are its weight and a normal reaction from the road surface.
- Resolve the equation of motion for the car into vertical and normal components.
- Solve for the vehicle speed.

Sample Problem 7

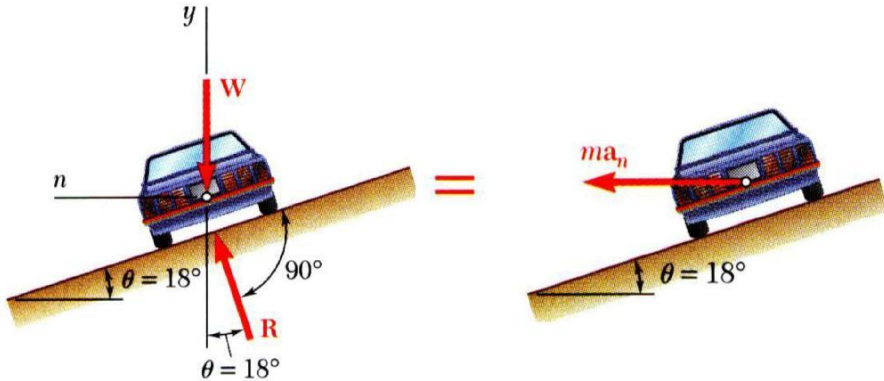

SOLUTION:

- The car travels in a horizontal circular path with a normal component of acceleration directed toward the center of the path. The forces acting on the car are its weight and a normal reaction from the road surface.

- Resolve the equation of motion for the car into vertical and normal components.

$$\sum F_y = 0 : \quad R \cos \theta - W = 0$$

$$R = \frac{W}{\cos \theta}$$

$$\sum F_n = ma_n : \quad R \sin \theta = \frac{W}{g} a_n$$

$$\frac{W}{\cos \theta} \sin \theta = \frac{W}{g} \frac{v^2}{\rho}$$

- Solve for the vehicle speed.

$$v^2 = g \rho \tan \theta$$


$$= (32.2 \text{ ft/s}^2)(400 \text{ ft}) \tan 18^\circ$$

$$v = 64.7 \text{ ft/s} = 44.1 \text{ mi/h}$$

Angular Momentum

From before, linear momentum: $\vec{L} = m\vec{v}$

Now angular momentum is defined as the *moment of momentum*

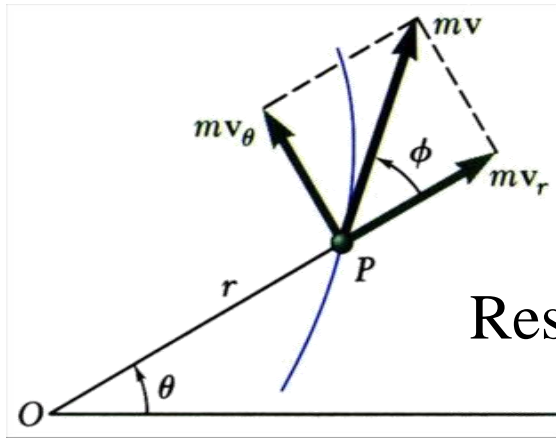

$$\vec{H}_O = \vec{r} \times m\vec{v}$$

\vec{H}_O is a vector perpendicular to the plane containing \vec{r} and $m\vec{v}$

Resolving into radial & transverse components:

$$H_{O\theta} = mvr = mr^2\dot{\theta}$$

Derivative of angular momentum with respect to time:


$$\dot{\vec{H}}_O = \dot{\vec{r}} \times m\vec{v} + \vec{r} \times m\dot{\vec{v}} = \vec{v} \times m\vec{v} + \vec{r} \times m\vec{a}$$

$$= \vec{r} \times \sum \vec{F} \quad \leftarrow \text{Moment of } \vec{F} \text{ about } O$$


$$= \sum \vec{M}_O$$

Sum of moments about O = rate of change of angular momentum


Equations of Motion in Radial & Transverse Components

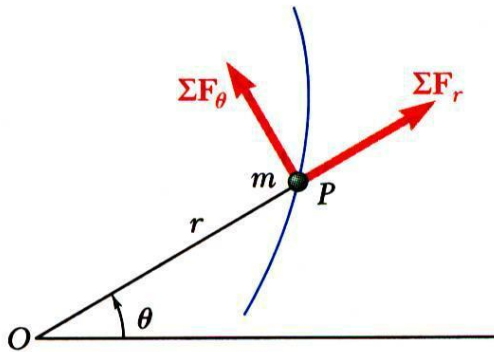

$$\begin{aligned} \Sigma F_\theta &= ma_\theta = m(r\ddot{\theta} + 2\dot{r}\dot{\theta}) \\ \Sigma F_r &= ma_r = m(\ddot{r} - r\dot{\theta}^2) \end{aligned}$$

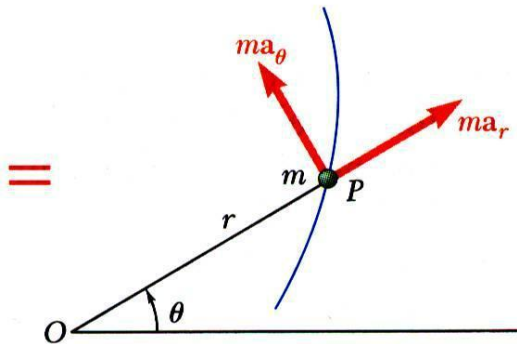

Central Force

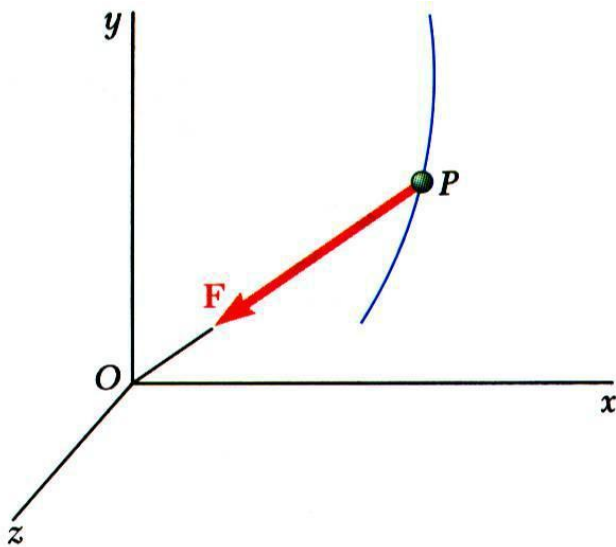

When force acting on particle is directed toward or away from a fixed point O , the particle is said to be *moving under a central force*.

O = center of force


Since line of action of the central force passes through O :

$$\sum \vec{M}_O = \dot{H}_O = 0$$



$$\vec{r} \times m\vec{v} = \vec{H}_O = \text{constant}$$

Sample Problem 8

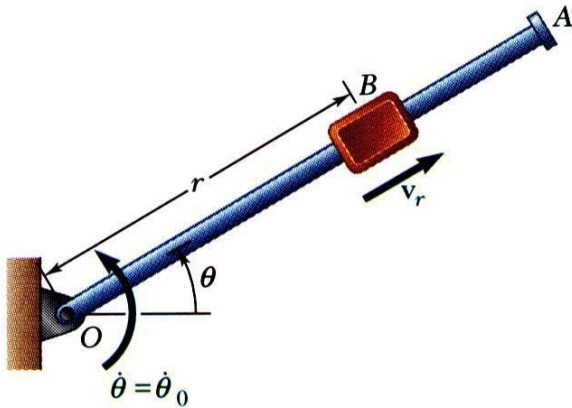

A block B of mass m can slide freely on a frictionless arm OA which rotates in a horizontal plane at a constant rate $\dot{\theta}_0$.


Knowing that B is released at a distance r_0 from O , express as a function of r

- the component v_r of the velocity of B along OA , and
- the magnitude of the horizontal force exerted on B by the arm OA .

SOLUTION:

- Write the radial and transverse equations of motion for the block.
- Integrate the radial equation to find an expression for the radial velocity.
- Substitute known information into the transverse equation to find an expression for the force on the block.

Sample Problem 8

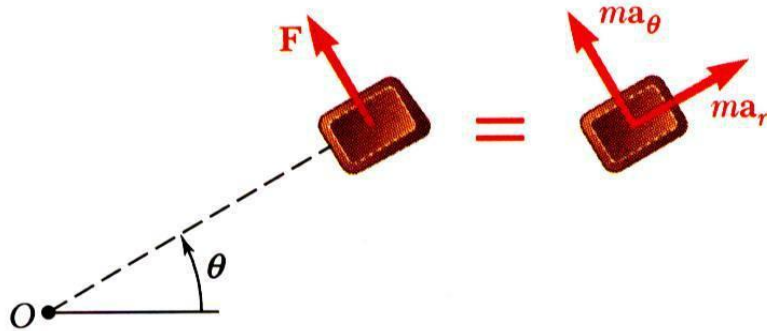

Write radial and transverse equations of motion:

$$\sum F_r = m a_r \quad \Rightarrow \quad (\ddot{r} - r \dot{\theta}^2)$$

$$\sum F_{\theta} = m a_{\theta} \quad \Rightarrow \quad F = m (r \ddot{\theta} + 2 \dot{r} \dot{\theta})$$

$$\Rightarrow \ddot{r} = r \ddot{\theta}$$

$$v_r = \frac{dr}{dt} = \frac{dr}{dr} \frac{dr}{dt} = v \frac{dr}{dt}$$

But $v_r = r \dot{\theta}$

$$r \dot{\theta} = v \frac{dr}{dr}$$

$$r \dot{\theta}^2 = v \frac{dv}{dr}$$

$$\int_{v_{r0}}^v dv_r = \int_{r_0}^r r \dot{\theta}_0^2 dr \quad \Rightarrow \quad v_r^2 = \dot{\theta}_0^2 (r^2 - r_0^2)$$

$$\Rightarrow v_r = \dot{\theta}_0 (r^2 - r_0^2)^{1/2}$$

$$\Rightarrow F = 2m \dot{\theta}_0^2 (r^2 - r_0^2)^{1/2}$$



UNIT-III

IMPULSE AND MOMENTUM, VIRTUAL VIRTUAL WORK

Impulse and momentum: Introduction; Impact, momentum, impulse, impulsive forces, units, law of conservation of momentum, Newton's law of collision of elastic bodies.

Coefficient of restitution, recoil of gun, impulse momentum equation; Virtual work: Introduction, principle of virtual work, applications, beams, lifting machines, simple framed structures.

Impulse = Momentum

Consider Newton's 2nd
Law and the

Impulse-Momentum Theorem

$$J = \Delta p$$
$$Ft = \Delta mv$$

$$\frac{F_{Net}}{m} = a, \quad a = \frac{\Delta v}{t}$$

$$\frac{F_{Net}}{m} = \frac{\Delta v}{t} \rightarrow Ft = \Delta mv$$

$$Ft = \text{Impulse}(J)$$

$$\Delta mv = \text{Momentum}(p)$$

Ns

Kg x m/s

Momentum is defined as “*Inertia in Motion*”

Units of Impulse:


Units of Momentum:

Impulse – Momentum Theorem

$$Ft = m\Delta v$$

IMPULSE



CHANGE IN MOMENTUM

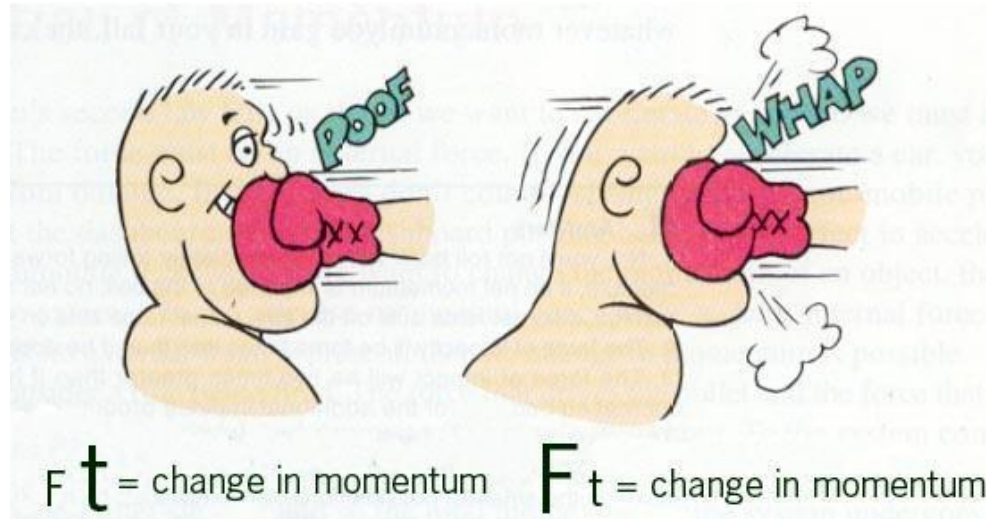

This theorem reveals some interesting relationships such as the INVERSE relationship between FORCE $m\Delta$ and v

TIME $F = t$

Impulse – Momentum Relationships

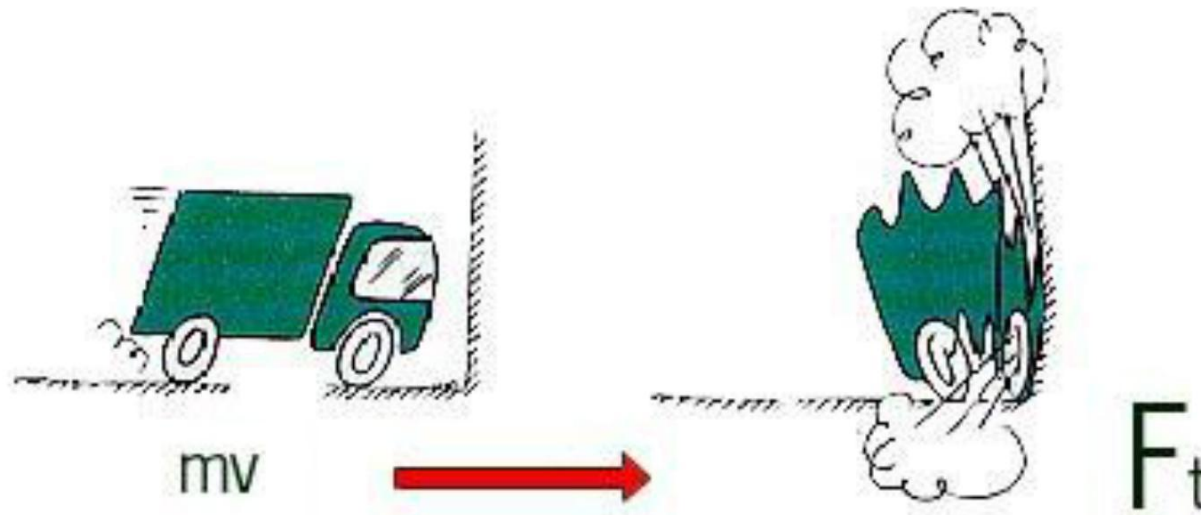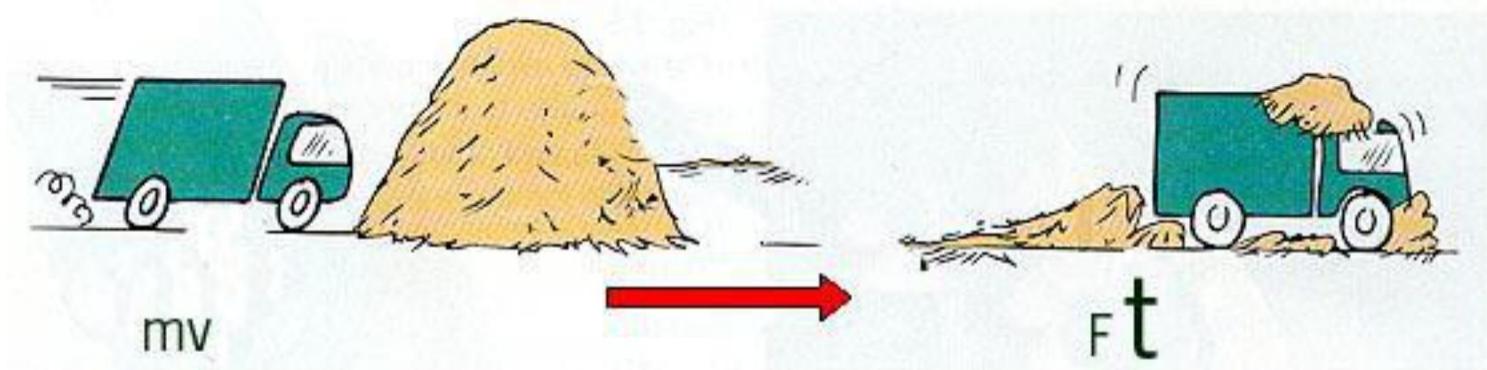

Impulse – Momentum Relationships

FOR THE SAME FORCE,
WHY IS THE SPEED OF A
CANNONBALL GREATER
WHEN SHOT FROM A
CANNON WITH A
LONGER BARREL?



$$fT = m\Delta V$$


Constant

Since TIME is directly related to the VELOCITY when the force and mass are constant, the LONGER the cannonball is in the barrel the greater the velocity.


Also, you could say that the force acts over a larger

displacement, thus there is


How about a collision?

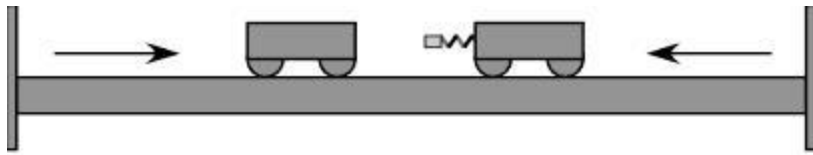

Consider 2 objects speeding toward each other. When they collide.....

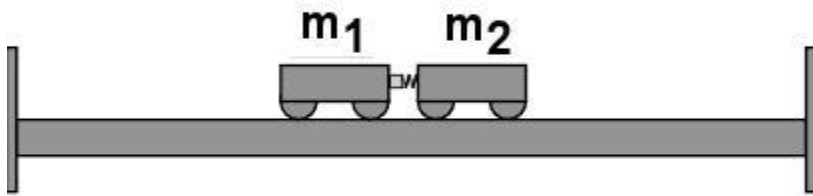

Due to Newton's 3rd Law the FORCE they exert on each other are EQUAL and OPPOSITE.

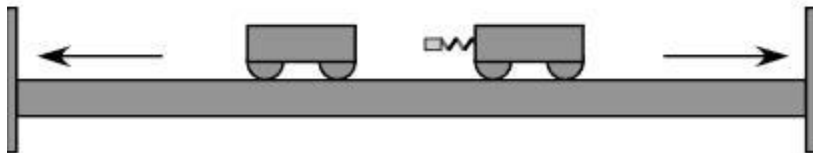

The TIMES of impact are also equal.

$$F_1 = -F_2 \quad t_1 =$$

$$t_2 \quad (Ft)_1 = -(Ft)_2$$

Therefore, the IMPULSES of the 2 objects colliding are also EQUAL

$$\mathbf{J}_1 = -\mathbf{J}_2$$

01/01/2018

Engineering Mechanics – Dynamics

141

How about a collision?

If the Impulses are
equal then the
MOMENTUMS are
 $J_1 = \text{also } -J_2$ equal!


$$p_1 = -p_2$$

$$m_1 \Delta v_1 = -m_2 \Delta v_2$$

$$m_1(v_1 - v_{o1}) = -m_2(v_2 - v_{o2})$$


$$\underbrace{m_1 v_1}_{\text{blue arrow right}} - \underbrace{m_1 v_{o1}}_{\text{blue arrow left}} = -m_2 v_2 + m_2 v_{o2} \quad \sum p_{\text{before}} = \sum p_{\text{after}}$$

$$m_1 v_{o1} + m_2 v_{o2} = m_1 v_1 + m_2 v_2$$

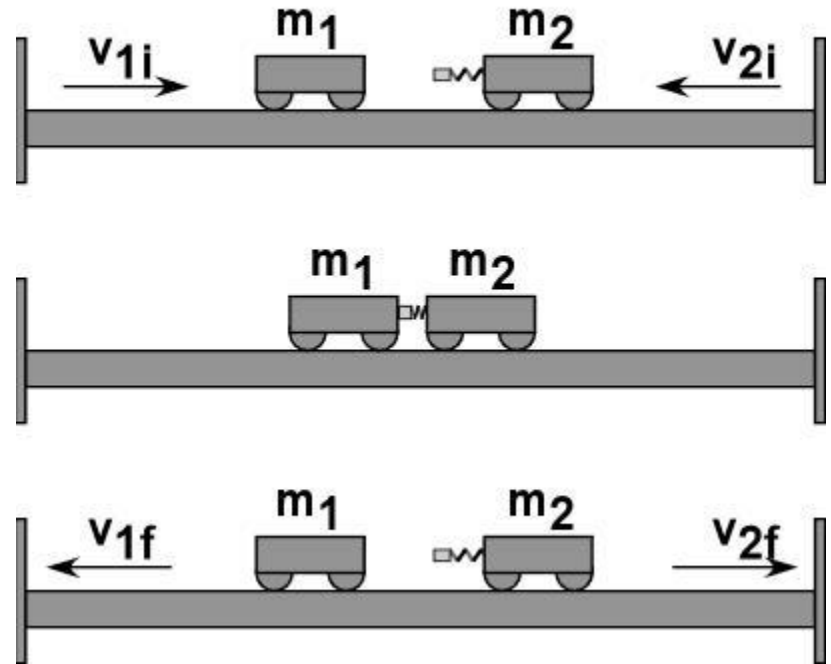

Momentum is conserved!

The Law of Conservation of Momentum: ***“In the absence of an external force (gravity, friction), the total momentum before the collision is equal to the total momentum after the collision.”***

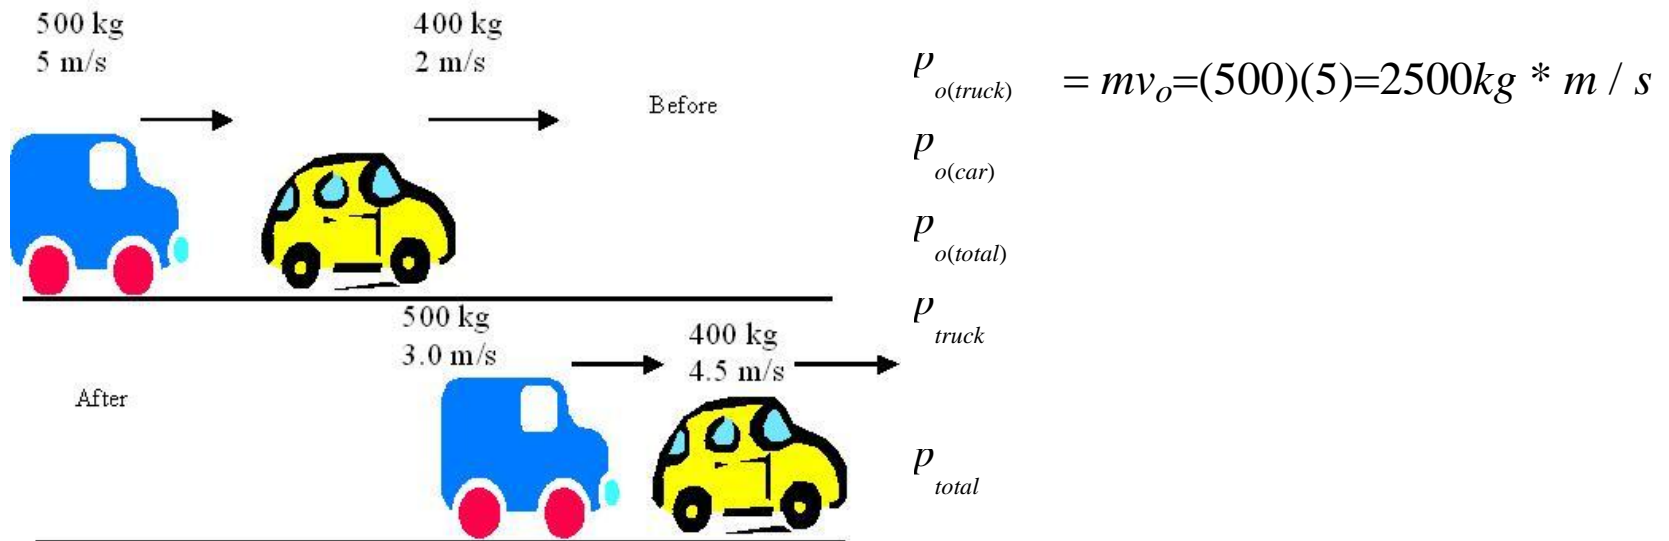

$$= (400)(2) = 800kg * m /$$

$$s = 3300kg * m / s$$


$$= 500 * 3 = 1500kg * m / s$$

$$p_{car} = 400 * 4.5 = 1800kg * m / s$$

$$= 3300kg * m / s$$

Types of Collisions

A situation where the objects **DO NOT STICK** is one type of collision

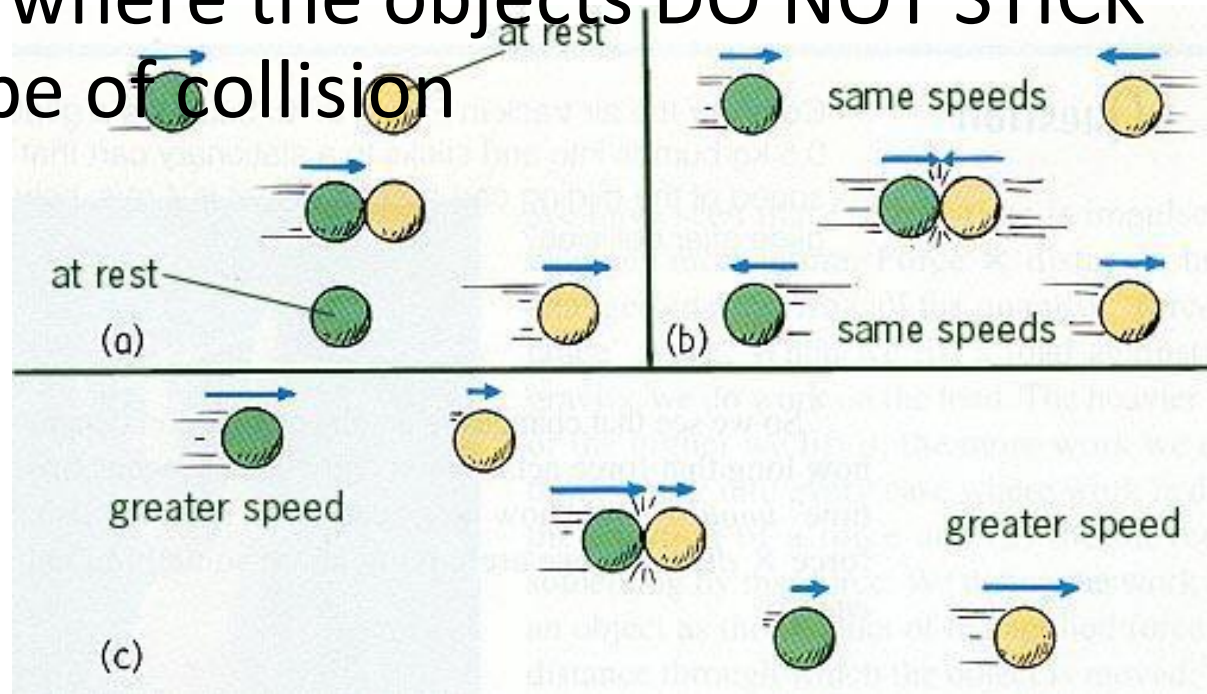


Notice that in EACH case, you have TWO objects BEFORE and AFTER the collision.

A “no stick” type collision

Car	
mass (kg)	1000
vel. (m/s)	20.0
mom. (kg m/s)	20 000

Truck	
mass (kg)	3000
vel. (m/s)	0.0
mom. (kg m/s)	0



Σp

before

=

Σp

after

$$m_1 v_{o1} + m_2 v_{o2} = m_1 v_1 + m_2 v_2$$

$$(1000)(20) + 0 = (1000)(v_1) + (3000)(10)$$

$$-10000 = 1000v_1$$

v

$$v_1 = \mathbf{-10 \text{ m/s}}$$

Types of Collisions

Another type of collision is one where the objects “STICK” together. Notice you have TWO objects before the collision and ONE object after the collision.



A “stick” type of collision

Car		Truck	
mass (kg)	1000	mass (kg)	3000
vel. (m/s)	20.0	vel. (m/s)	0.0
mom. (kg m/s)	20 000	mom. (kg m/s)	0



$$\begin{array}{c}
 \Sigma p \\
 \text{before}
 \end{array}
 =
 \begin{array}{c}
 \Sigma p \\
 \text{after}
 \end{array}$$


$$\begin{array}{l}
 m_1 v_{o1} + m_2 v_{o2} = m_T v_T \\
 (1000)(20) + 0 = (4000)v_T \\
 20000 = 4000v_T \\
 v_T = \mathbf{5 \text{ m/s}}
 \end{array}$$

The “explosion” type

before




after

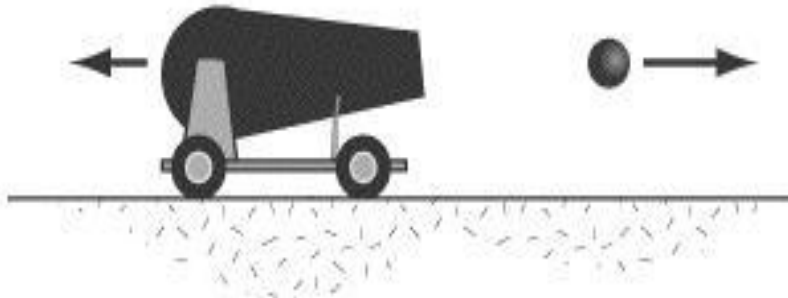

This type is often referred to as “backwards inelastic”. Notice you have ONE object (we treat this as a SYSTEM) before the explosion and TWO objects after the explosion.

Backwards Inelastic - Explosions

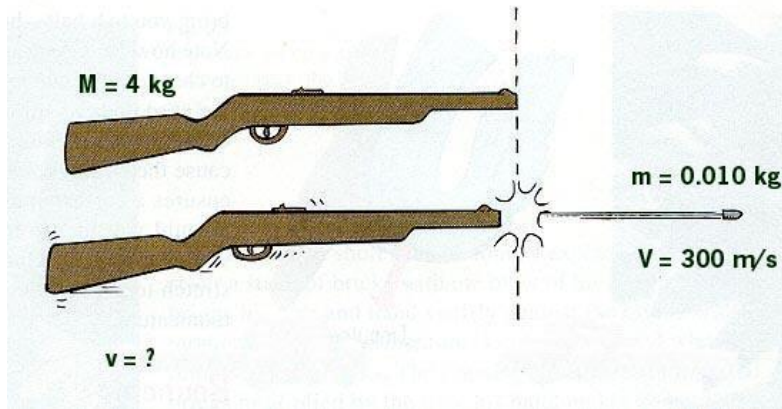

Suppose we have a 4-kg rifle loaded with a 0.010 kg bullet. When the rifle is fired the bullet exits the barrel with a velocity of 300 m/s. How fast does the gun RECOIL backwards?

$\sum p$ before	=	$\sum p$ after
$m_T v_T$	=	$m_1 v_1 + m_2 v_2$
$(4.010)(0)$	=	$(0.010)(300) + (4)(v_2)$
0	=	$3 + 4v_2$
v_2	=	-0.75 m/s

Collision Summary

Sometimes objects stick together or blow apart. In this case, momentum is ALWAYS conserved.

$$\sum p_{\text{before}} = \sum p_{\text{after}}$$

$$m_1 v_{01} + m_2 v_{02} = m_1 v_1 + m_2 v_2 \longrightarrow \text{When 2 objects collide and DON'T stick together}$$

$$m_1 v_{01} + m_2 v_{02} = m_{\text{total}} v_{\text{total}} \longrightarrow \text{When 2 objects collide and stick together}$$


$$m_{\text{total}} v_{o(\text{total})} = m_1 v_1 + m_2 v_2 \longrightarrow \text{When 1 object breaks into 2 objects}$$

Elastic Collision = Kinetic Energy **is**

Conserved **Inelastic** Collision = Kinetic Energy is **NOT**
Conserved

Elastic Collision

Car		Truck	
mass (kg)	1000	mass (kg)	3000
vel. (m/s)	20.0	vel. (m/s)	0.0
mom. (kg m/s)	20 000	mom. (kg m/s)	0

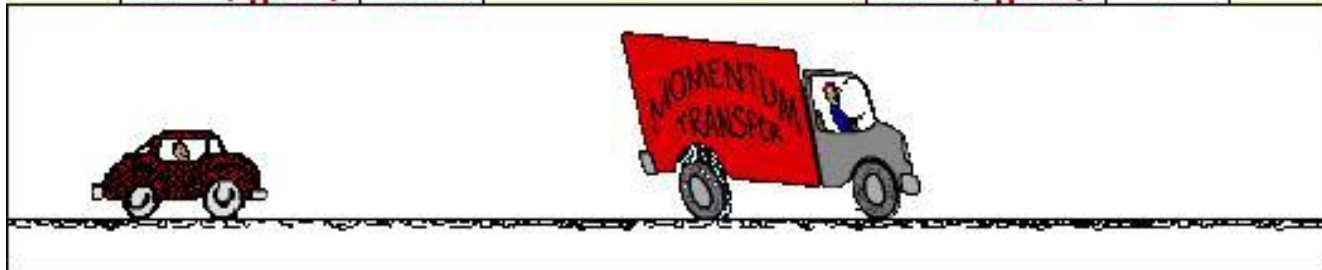

$$KE_{car}(Before) = \frac{1}{2}mv^2 = 0.5(1000)(20)^2 = 200,000J$$


$$KE_{truck}(After) = 0.5(3000)(10)^2 = 150,000J$$

$$KE_{car}(After) = 0.5(1000)(-10)^2 = 50,000J$$

Since KINETIC ENERGY is conserved during the collision we call this an **ELASTIC COLLISION**.

Inelastic Collision

Car		Truck	
mass (kg)	1000	mass (kg)	3000
vel. (m/s)	20.0	vel. (m/s)	0.0
mom. (kg m/s)	20 000	mom. (kg m/s)	0




$$KE_{car} (Before) = \frac{1}{2}mv^2 = 0.5(1000)(20)^2 = 200,000J$$

$$KE_{truck/car} (After) = 0.5(4000)(5)^2 = 50,000J$$

Since KINETIC ENERGY was NOT conserved during the collision we call this an **INELASTIC COLLISION**.

Example

Granny ($m=80$ kg) whizzes around the rink with a velocity of 6 m/s. She suddenly collides with Ambrose ($m=40$ kg) who is at rest directly in her path. Rather than knock him over, she picks him up and continues in motion without "braking." Determine the velocity of Granny and Ambrose.

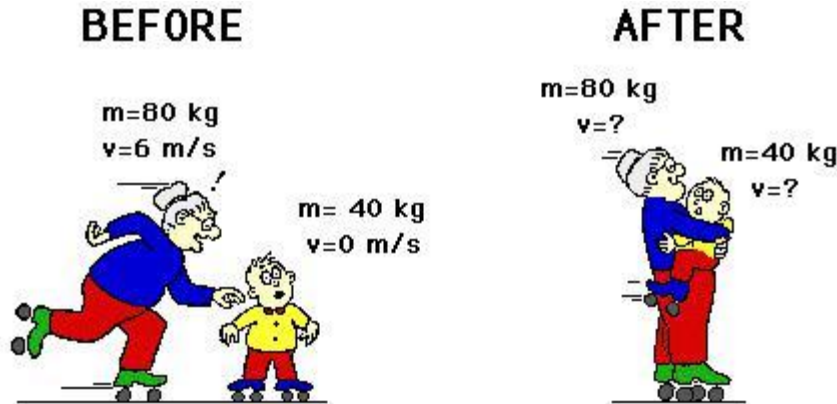

How many objects do I have before the collision? $= \sum p_b = \sum p_a$

2

$$m_1 v_{o1} + m_2 v_{o2} = m_T v_T$$

objects do I have after the collision?


How many

1

$$(80)(6) + (40)(0) = 120v_T$$


$$v_T = 4 \text{ m/s}$$

Collisions in 2 Dimensions

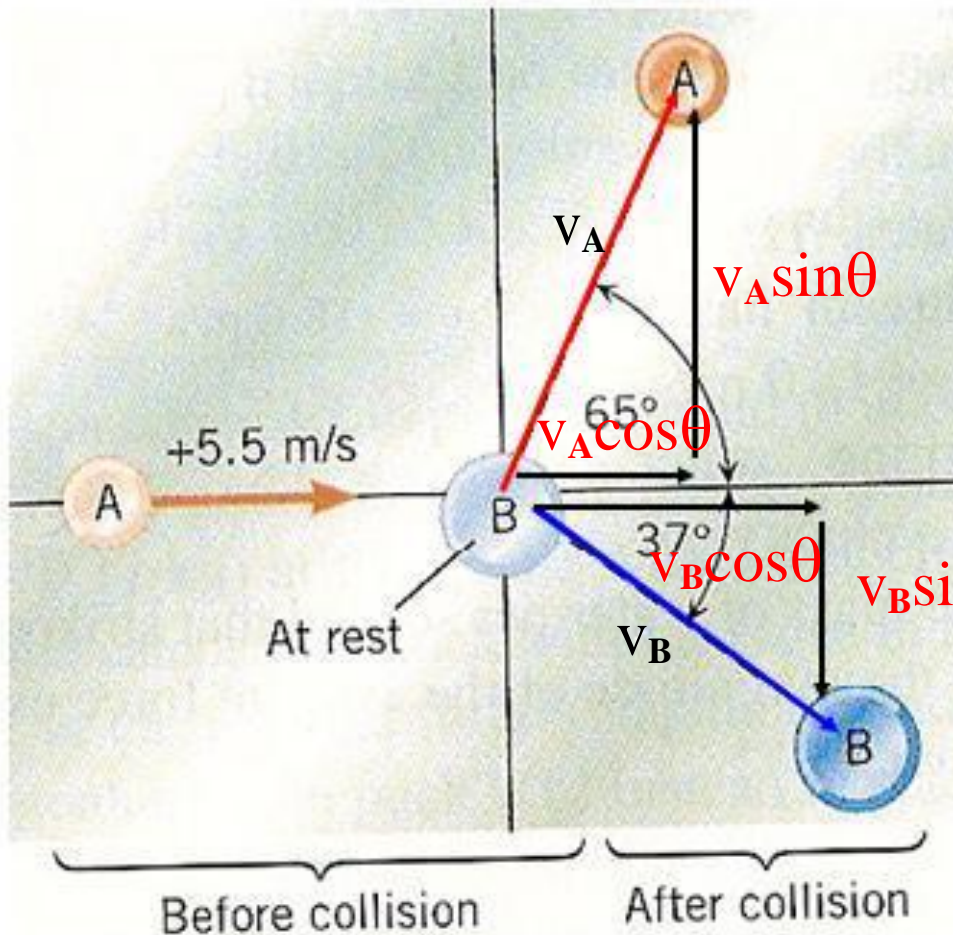

The figure to the left shows a collision between two pucks on an air hockey table. Puck A has a mass of 0.025-kg and is moving along the x-axis with a velocity of $+5.5 \text{ m/s}$. It makes a collision with puck B, which has a mass of 0.050-kg and is initially at rest. The collision is NOT head on. After the collision, the two pucks fly apart with angles shown in the drawing. Calculate the speeds of the pucks after the collision.

Collisions in 2 dimensions

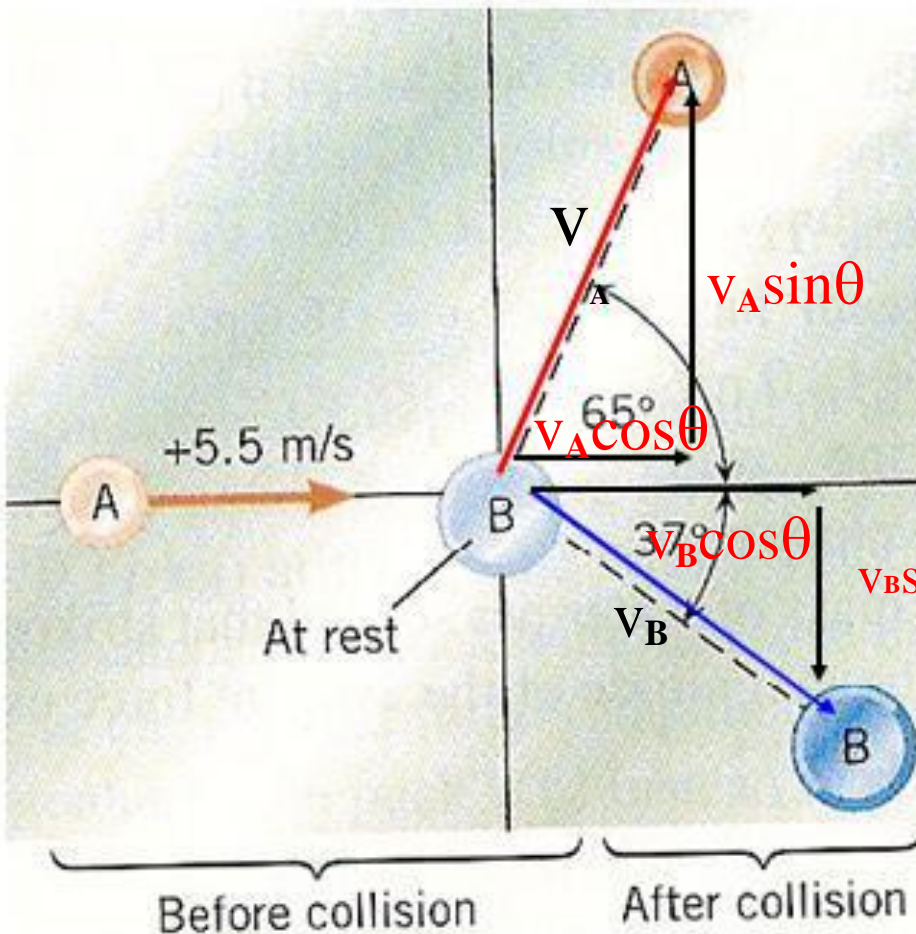

$$\sum p_{ox} = \sum p_x$$

$$m_A v_{Ax} + m_B v_{Bx} = m_A v_{Ax} + m_B v_{Bx}$$

$$(0.025)(5.5) + 0 = (0.025)(v_A \cos 65) + (0.050)(v_B \cos 37)$$

$$0.1375 = 0.0106v_A + 0.040v_B$$

$$\sum p_{oy} = \sum p_y$$

$$0 = m_A v_{Ay} + m_B v_{By}$$

$$0 = (0.025)(v_A \sin 65) + (0.050)(-v_B \sin 37)$$

$$0.0300v_B = 0.0227v_A$$

$$v_B = 0.757v_A$$

Collisions in 2 dimensions

$$0.1375 = 0.0106v_A + 0.040v_B$$

$$v_B = 0.757(2.84) = 2.15 \text{ m/s}$$

$$0.1375 = 0.0106v_A + (0.050)(0.757v_A)$$

$$0.1375 = 0.0106v_A + 0.03785v_A$$

$$0.1375 = 0.04845v_A$$

$$v_A = 2.84 \text{ m/s}$$


UNIT-IV

WORK ENERGY METHOD

Work energy method: Law of conservation of energy, application of work energy, method to particle motion and connected system, work energy applied to connected systems, work energy applied to fixed axis rotation.

Law of Conservation of Energy

Energy Transformations

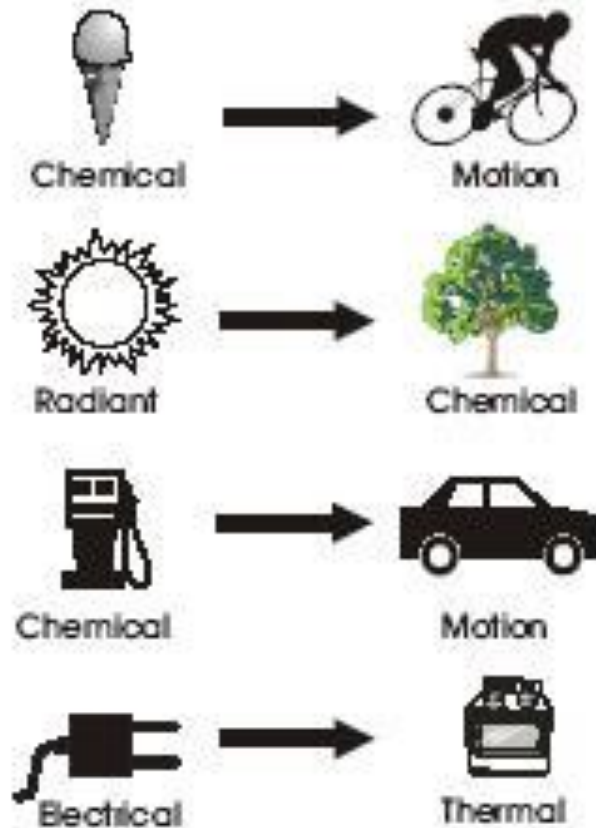

- What you put in is what you get out
- Total energy is conserved

Practical Applications



- Gasoline converts to energy which moves the car
- A battery converts stored chemical energy to electrical energy
- Dams convert the kinetic energy of falling water into electrical energy



Can You Think of Other Examples?



Conservation of Mechanical Energy

$$\frac{1}{2}mv^2 + mgh = E$$

m = mass

v = velocity


g = gravitational acceleration

h = height

Kinetic
Energy

Potential
Energy


Total
Energy

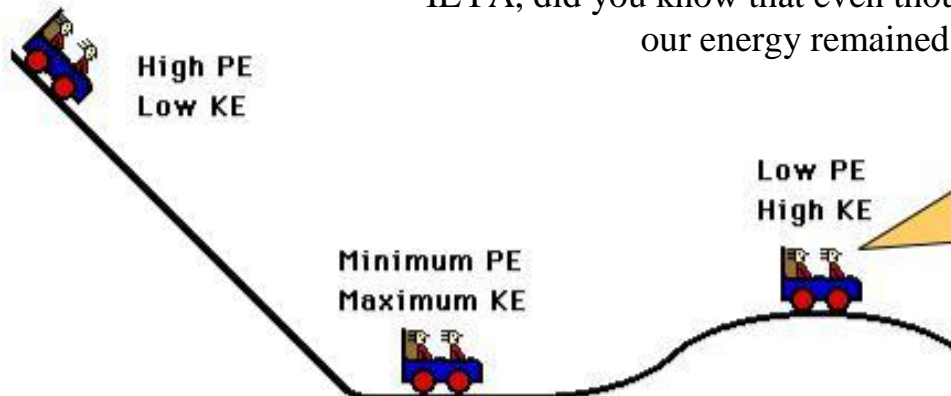


As a coaster car loses height, it gains speed; PE is transformed into KE. As a coaster car gains height it loses speed; KE is transformed into PE. The sum of the KE and PE is a constant.

Example of Conservation of Mechanical Energy

$$\frac{1}{2}mv^2 + mgh = E$$

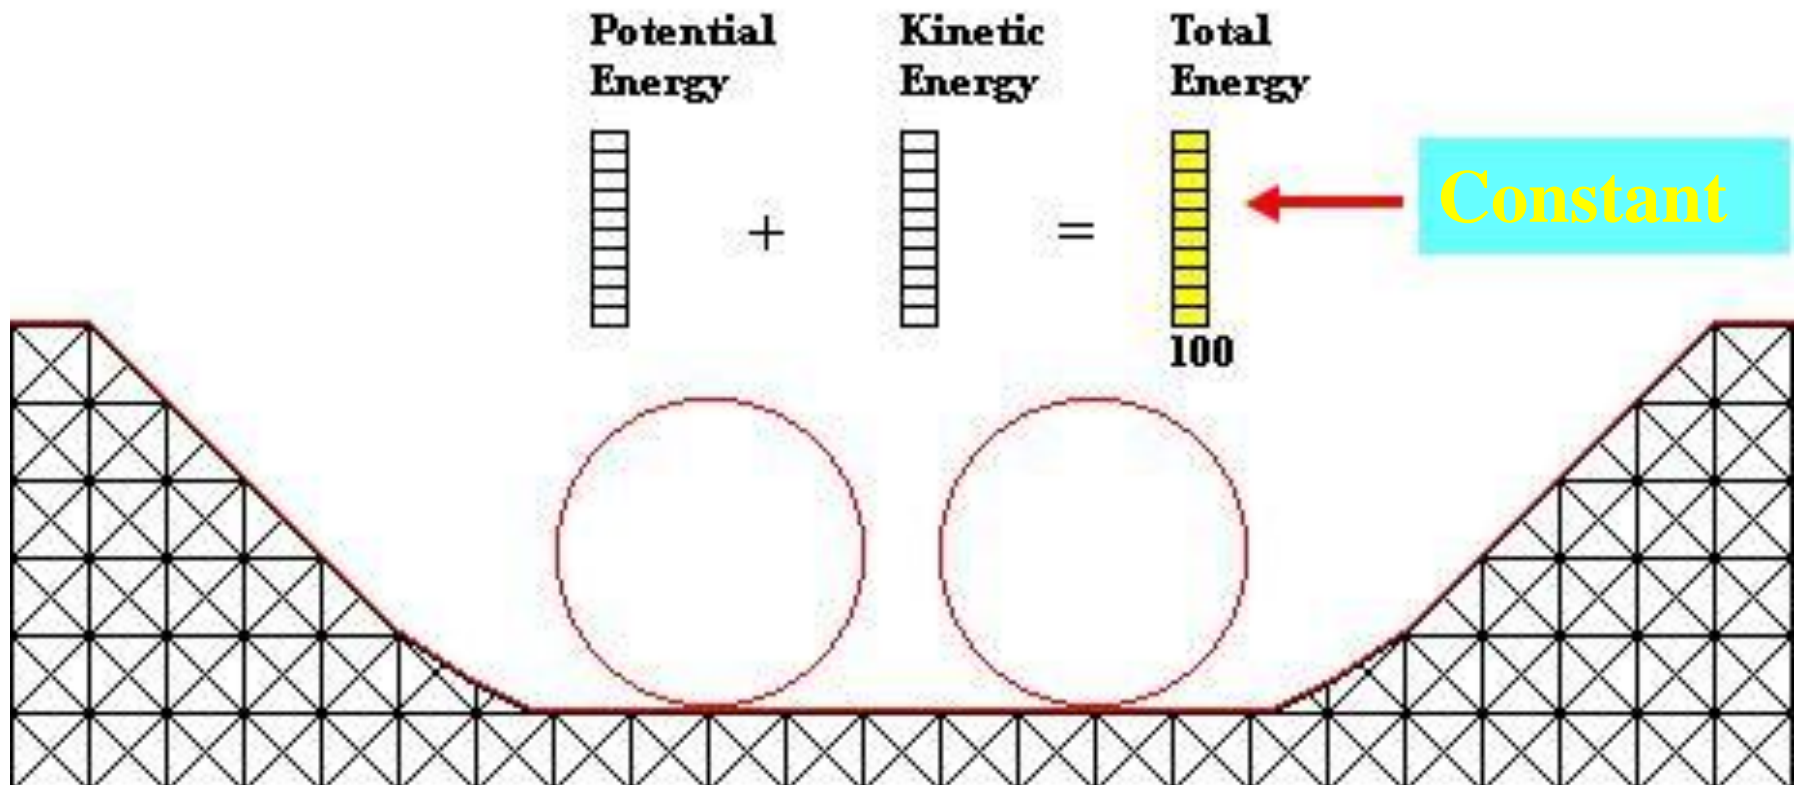


An Example

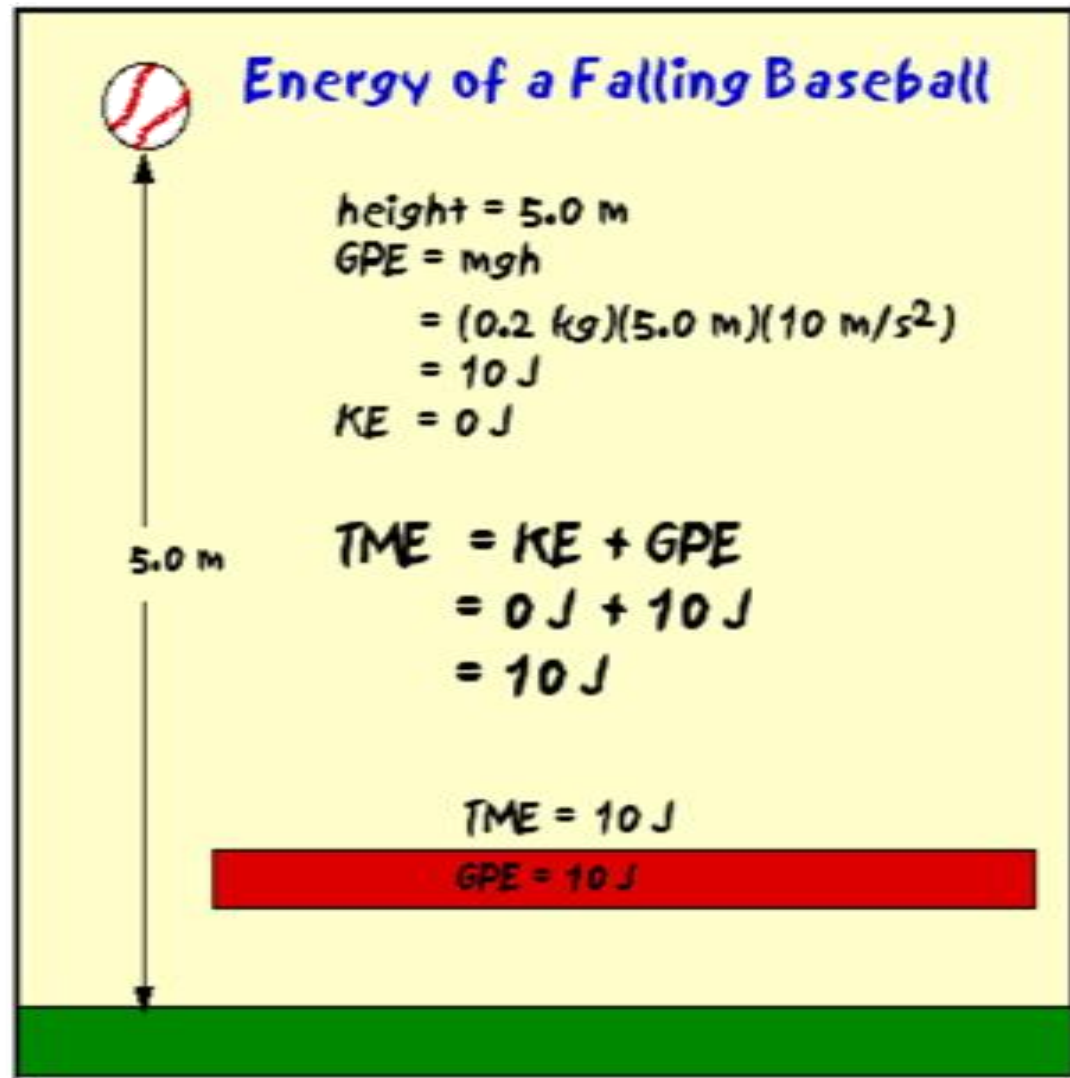

Another Example

Energy of a Falling Baseball

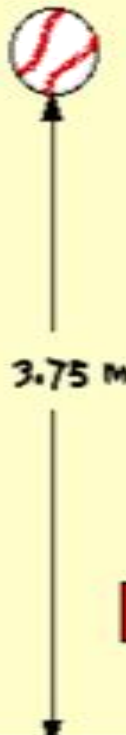

height = 3.75 m
GPE = mgh
 $= (0.2 \text{ kg})(3.75 \text{ m})(10 \text{ m/s}^2)$
 $= 7.5 \text{ J}$
KE = 2.5 J

TME = KE + GPE
 $= 2.5 \text{ J} + 7.5 \text{ J}$
 $= 10 \text{ J}$


TME = 10 J

GPE = 7.5 J	KE = 2.5 J
-------------	------------

Yet Another Example


Energy of a Falling Baseball

height = 2.5 m
GPE = mgh
 $= (0.2 \text{ kg})(2.5 \text{ m})(10 \text{ m/s}^2)$
 $= 5.0 \text{ J}$
KE = 5.0 J



TME = KE + GPE
 $= 5.0 \text{ J} + 5.0 \text{ J}$
 $= 10 \text{ J}$

TME = 10 J



Last Example

Energy of a Falling Baseball

$$\text{height} = 0 \text{ m}$$

$$\text{GPE} = mgh$$

$$= (0.2 \text{ kg})(0 \text{ m})(10 \text{ m/s}^2)$$

$$= 0 \text{ J}$$

$$\text{KE} = 10 \text{ J}$$

$$\text{TME} = \text{KE} + \text{GPE}$$

$$= 10 \text{ J} + 0 \text{ J}$$

$$= 10 \text{ J}$$

$$\text{TME} = 10 \text{ J}$$

$$\text{KE} = 10 \text{ J}$$




UNIT-V


MECHANICAL VIBRATIONS

Definitions and concepts, simple harmonic motion, free vibrations, simple and compound pendulum, torsion pendulum, free vibrations without damping, general cases.

Simple Harmonic Motion

- Harmonic Motion is any motion that repeats itself.
- Examples of Harmonic Motion.

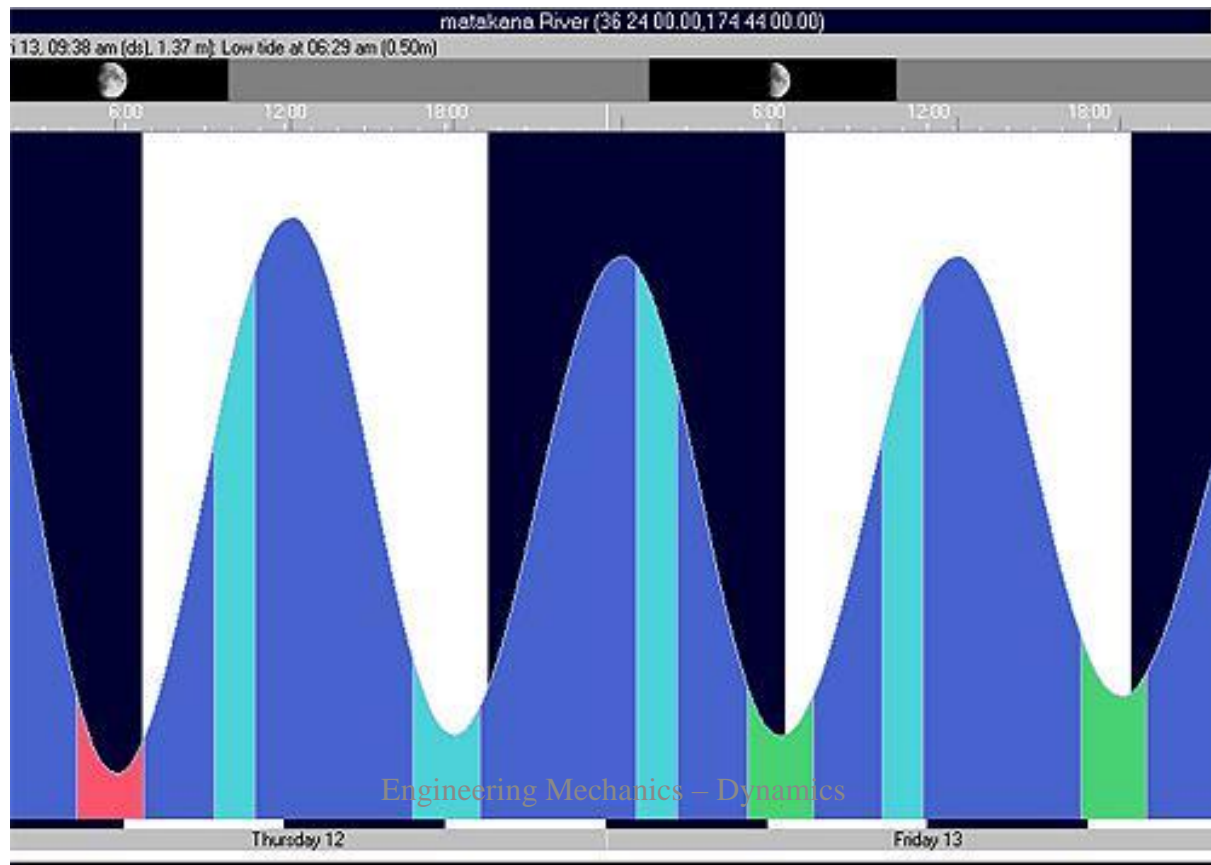

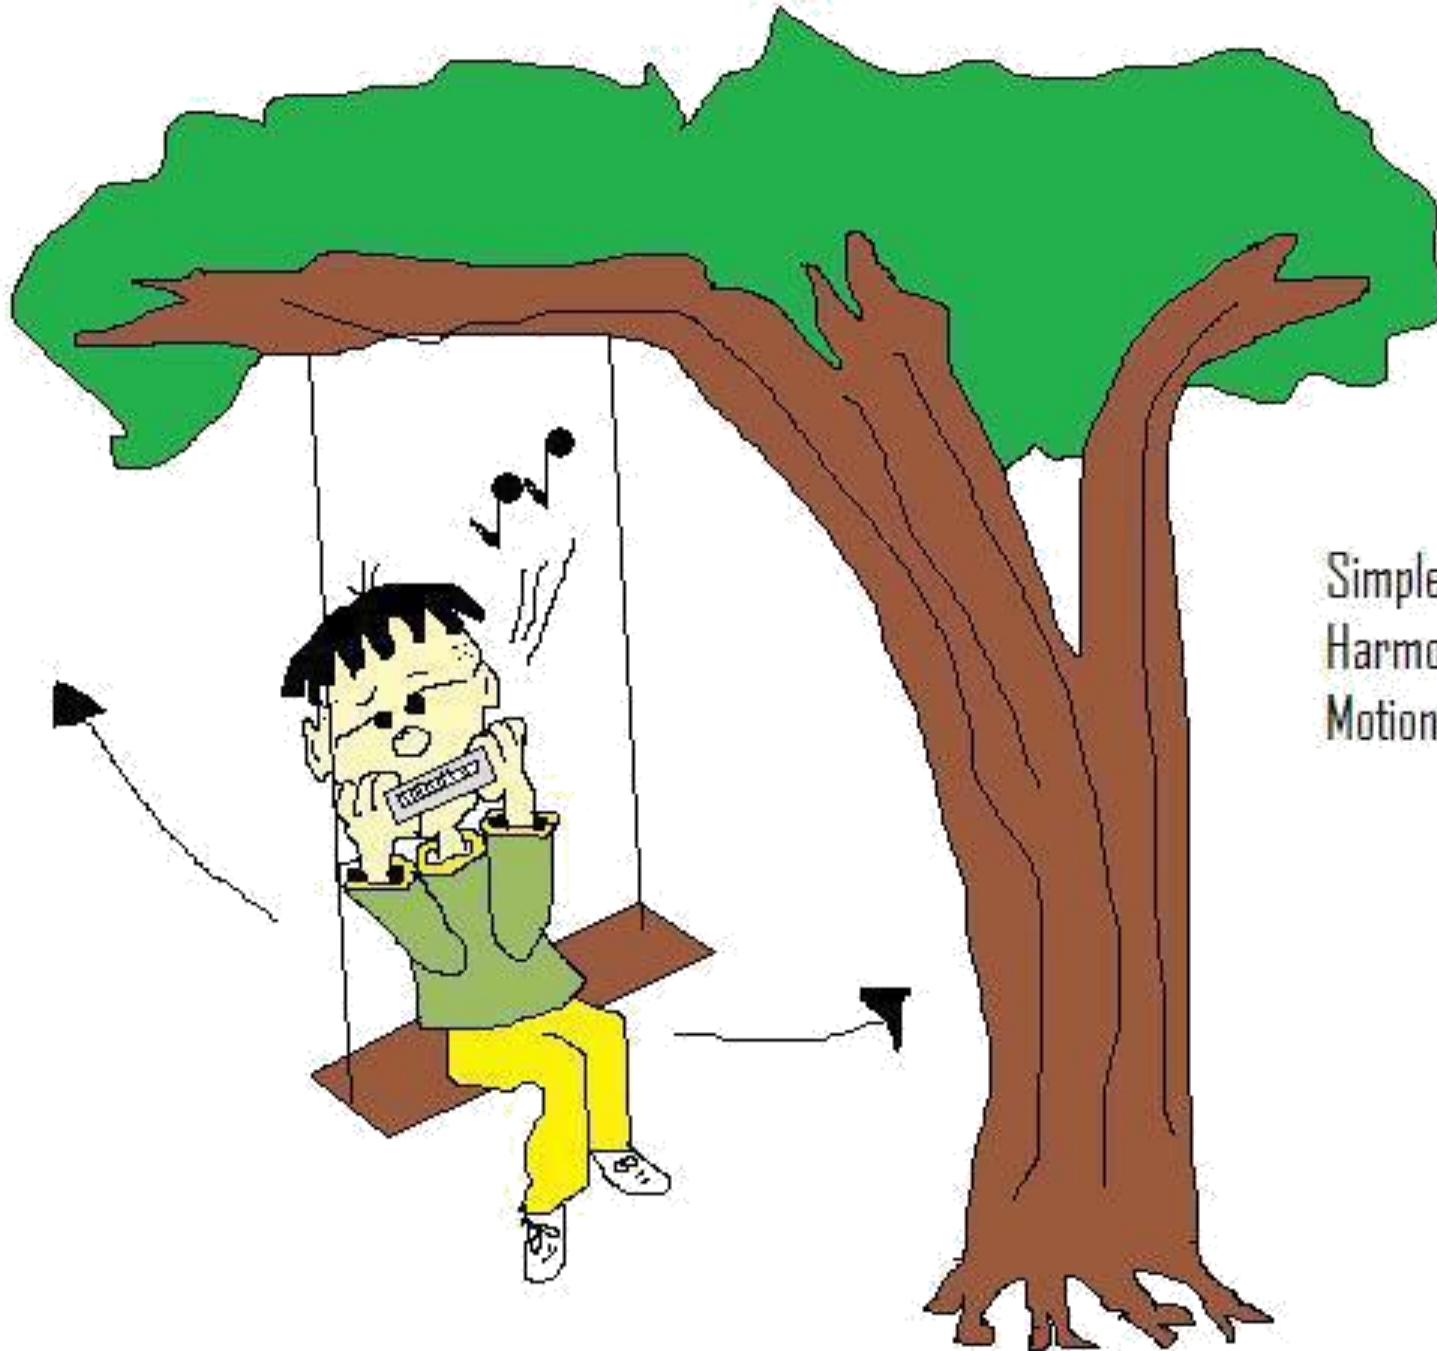

Simple
Harmonic
Motion.....







Period

Time for one oscillation

Frequency

Number of oscillations in
one second


Displacement

Distance from equilibrium

Amplitude

Maximum displacement


- Simple harmonic motion is a special type of harmonic motion.
- Consider a mass on a spring.

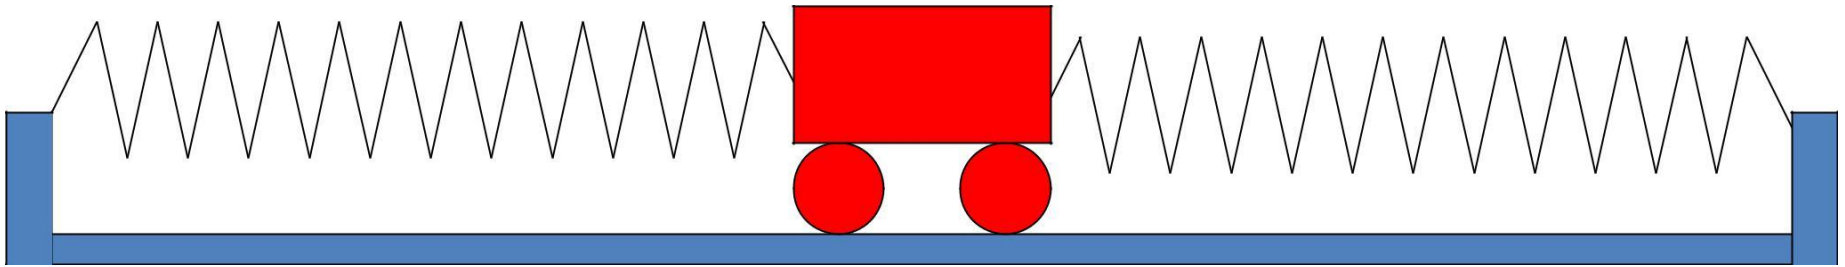


- The cart is in **equilibrium**, because the **total force** is **zero**.
- The **acceleration** is also **zero**.
(this doesn't mean it's stationary)

Lets look at the forces


force

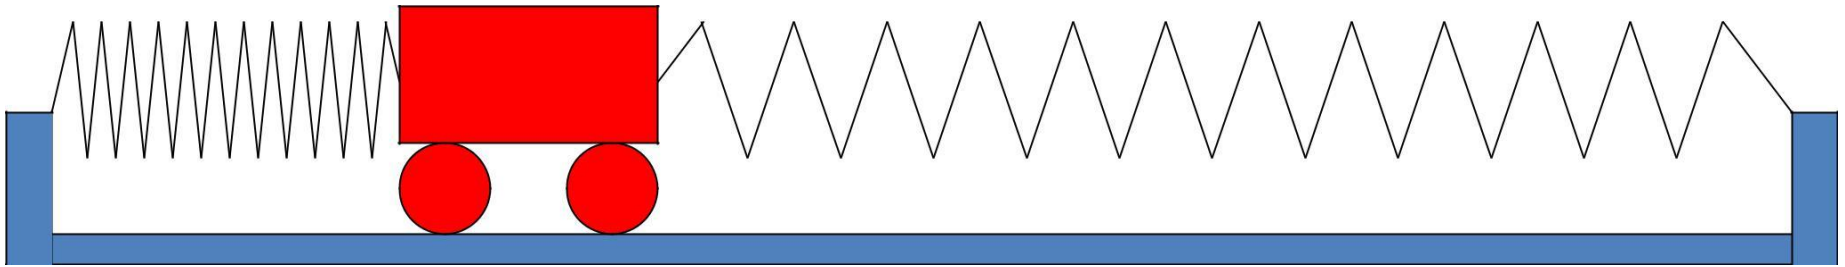


$\text{dispt} = -A$

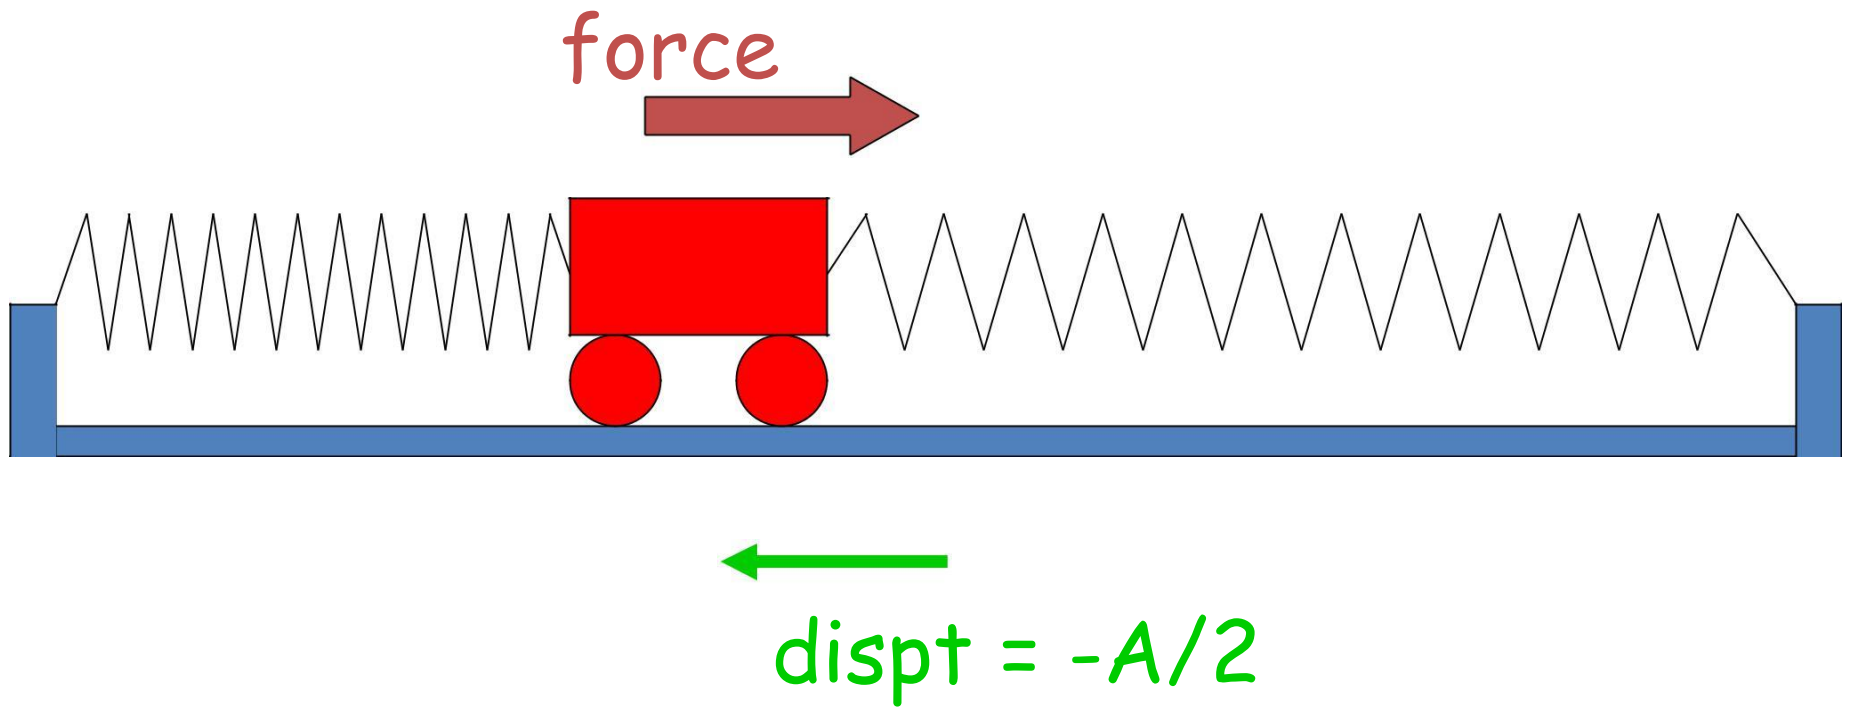



Force = 0

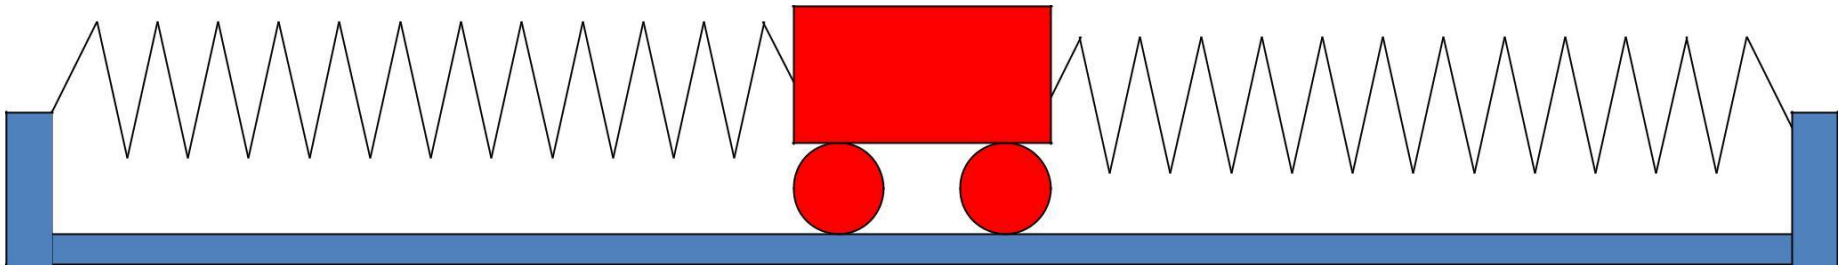

dispt = 0

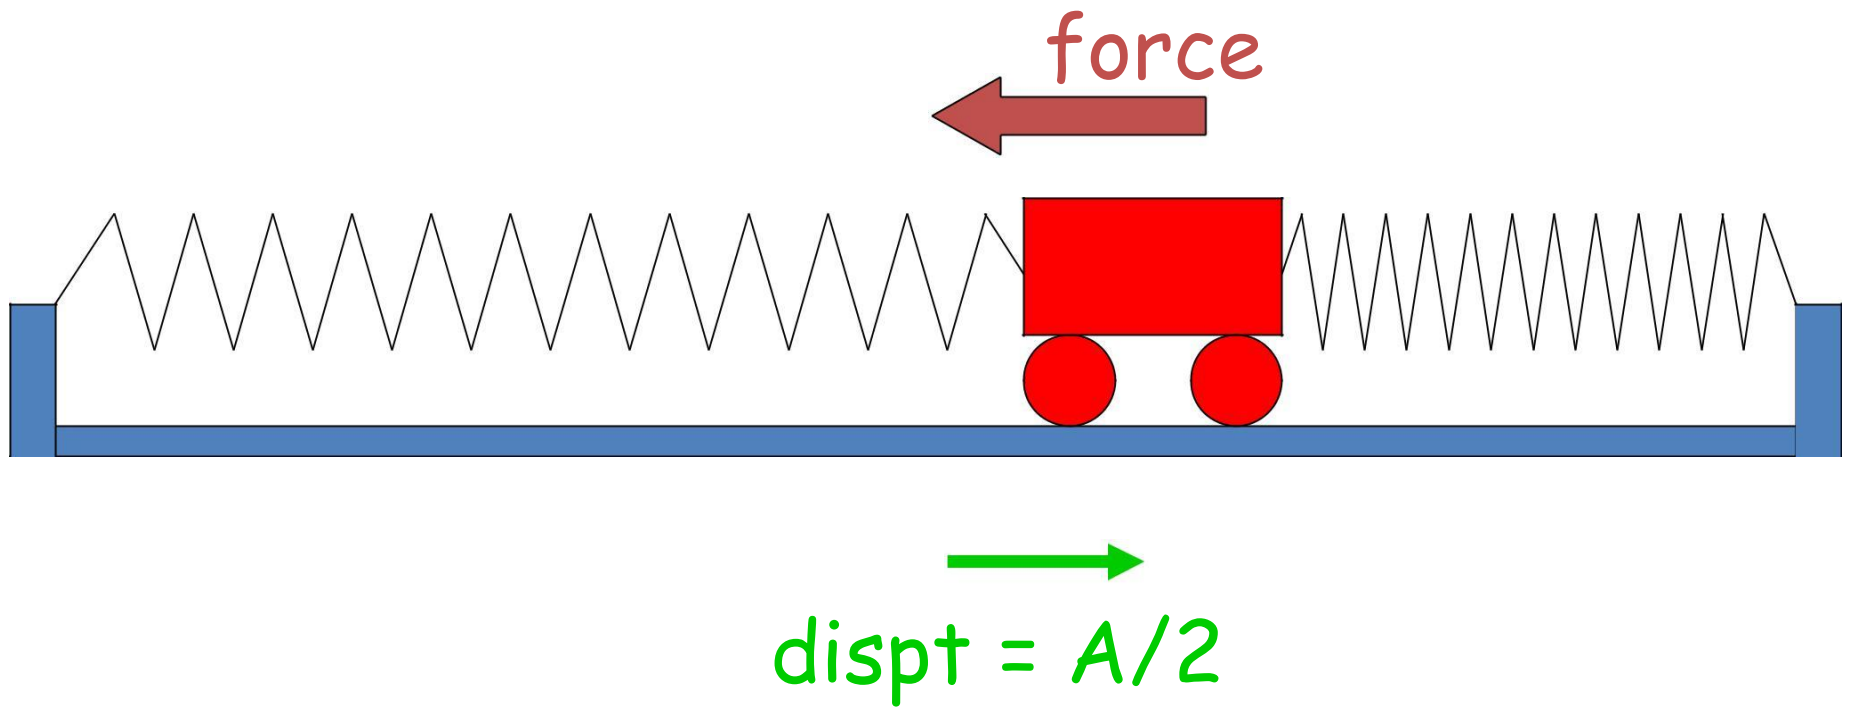

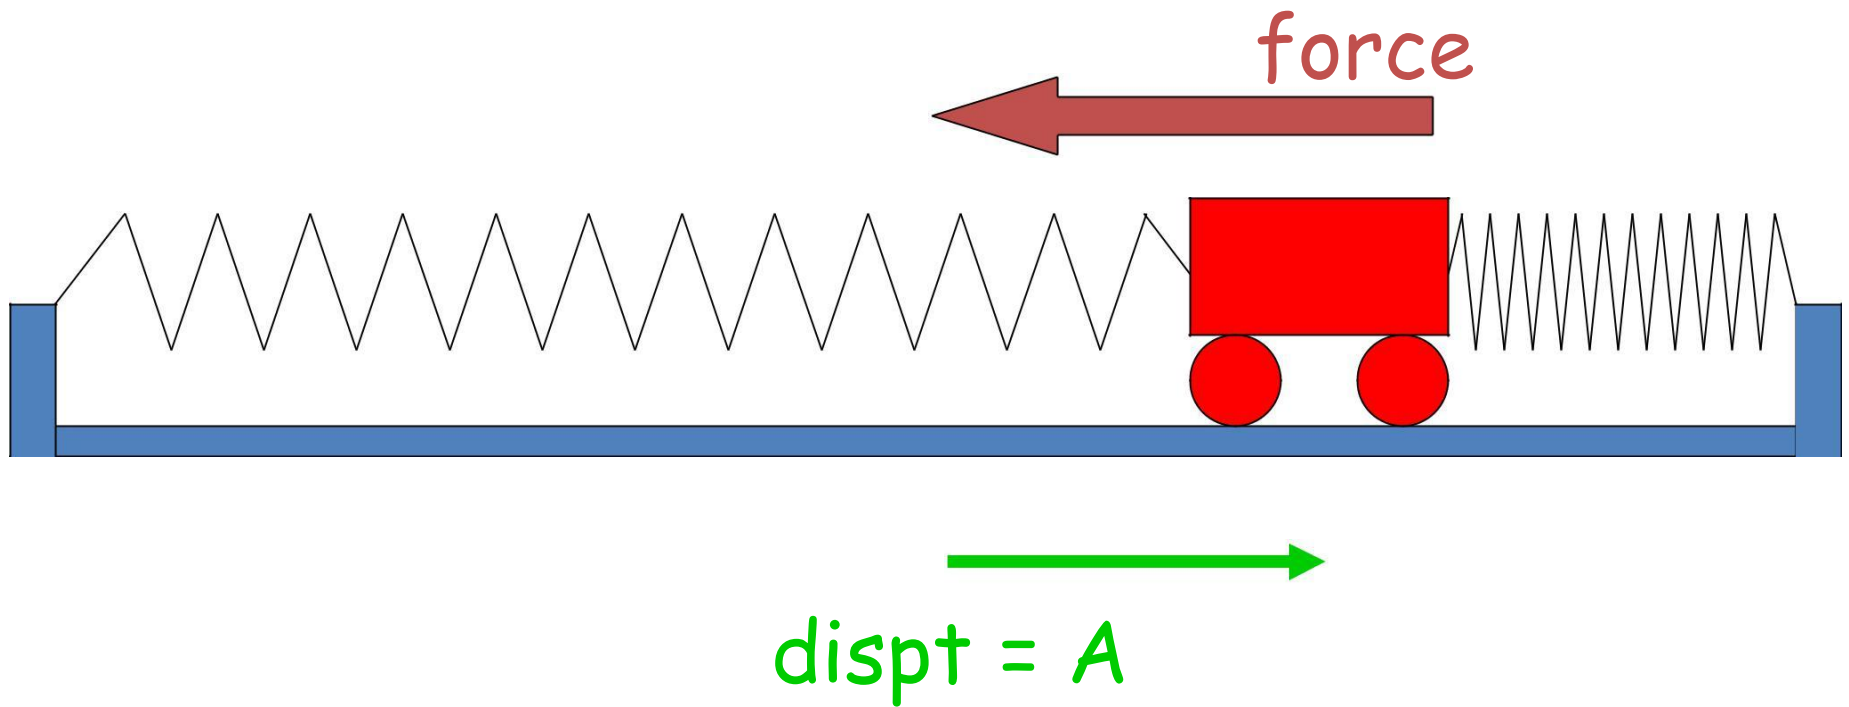

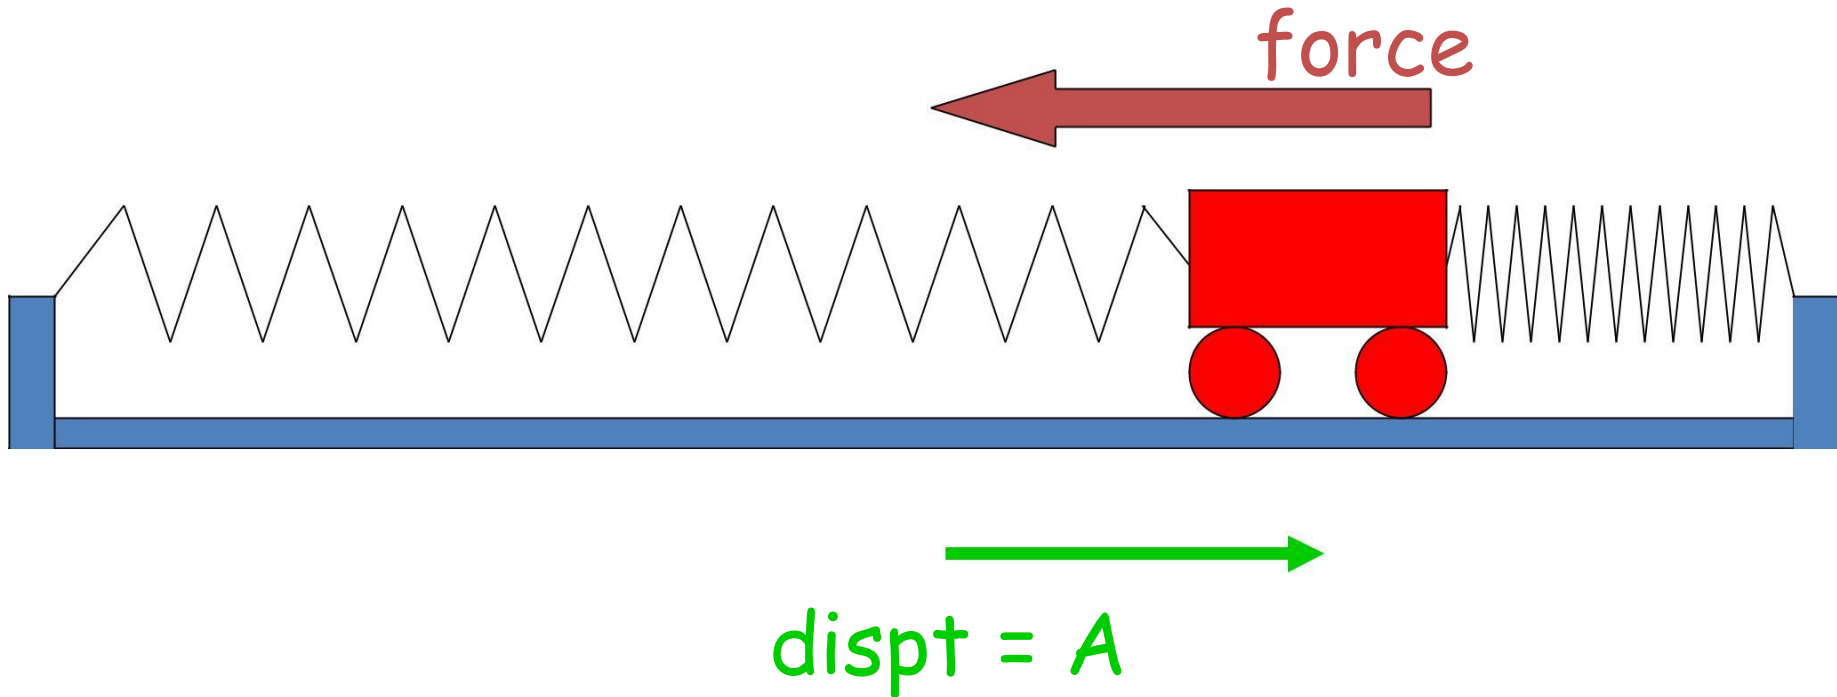


- Notice that as the **displacement** *increases*, the **restoring force** *increases*.
- Notice that the **restoring force** is always in the ***opposite direction*** to the **displacement**

Now we'll look at the acceleration

acceleration



force

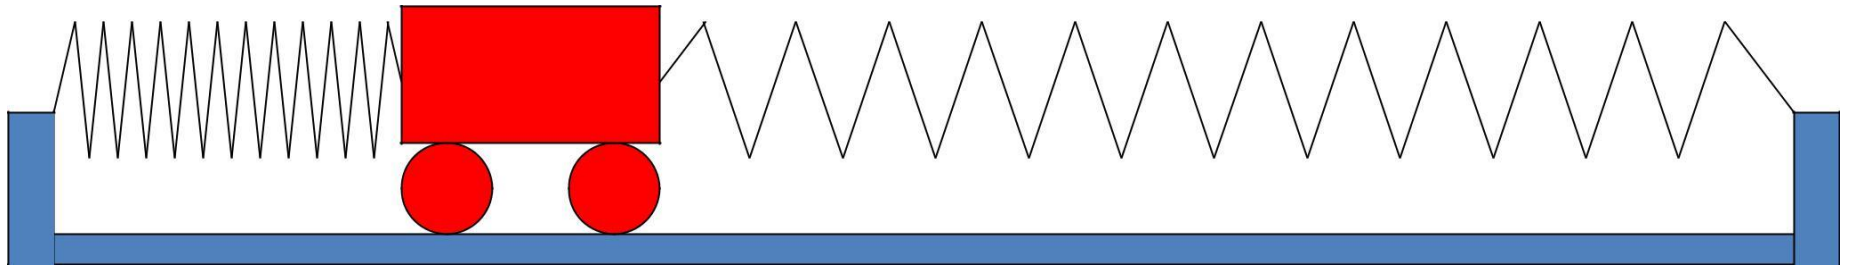


$\text{dispt} = -A$

acceleration




force

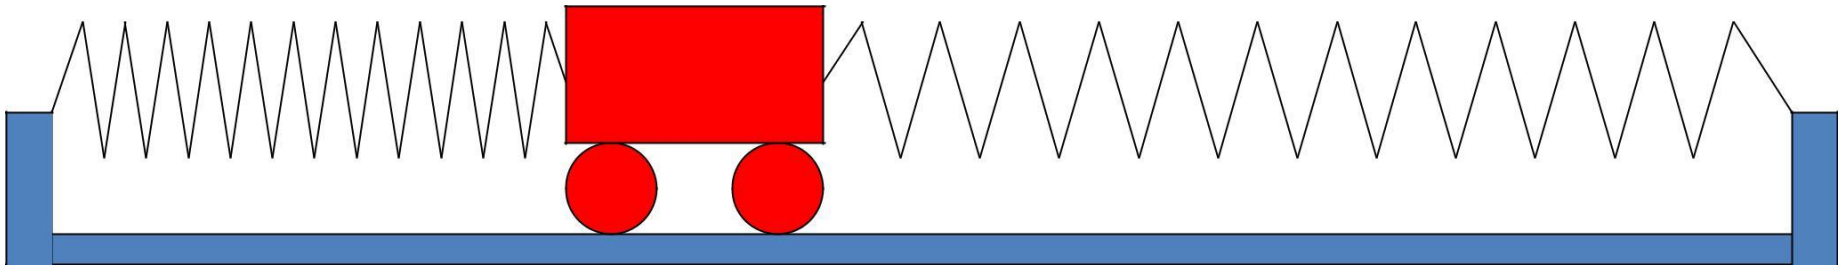


$$\text{dispt} = -A/2$$


Acceleration = 0


Force = 0

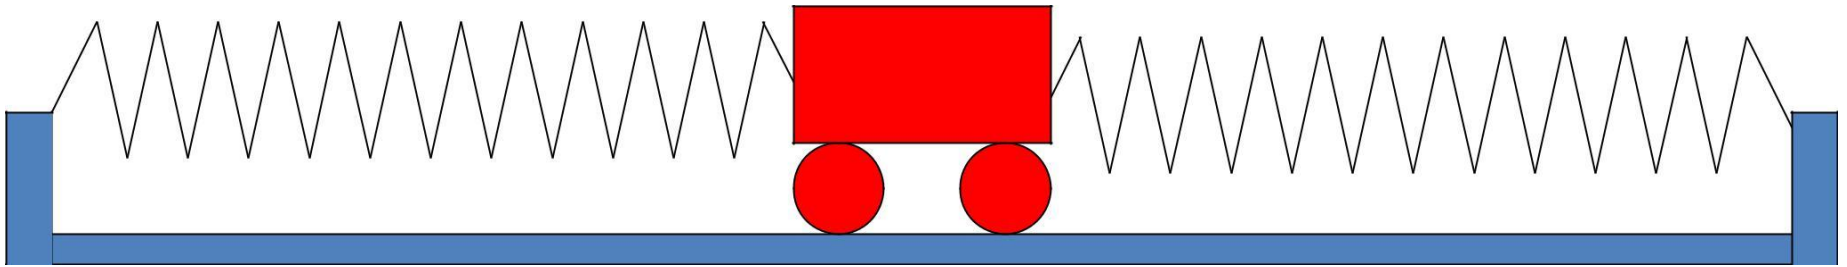

dispt = 0

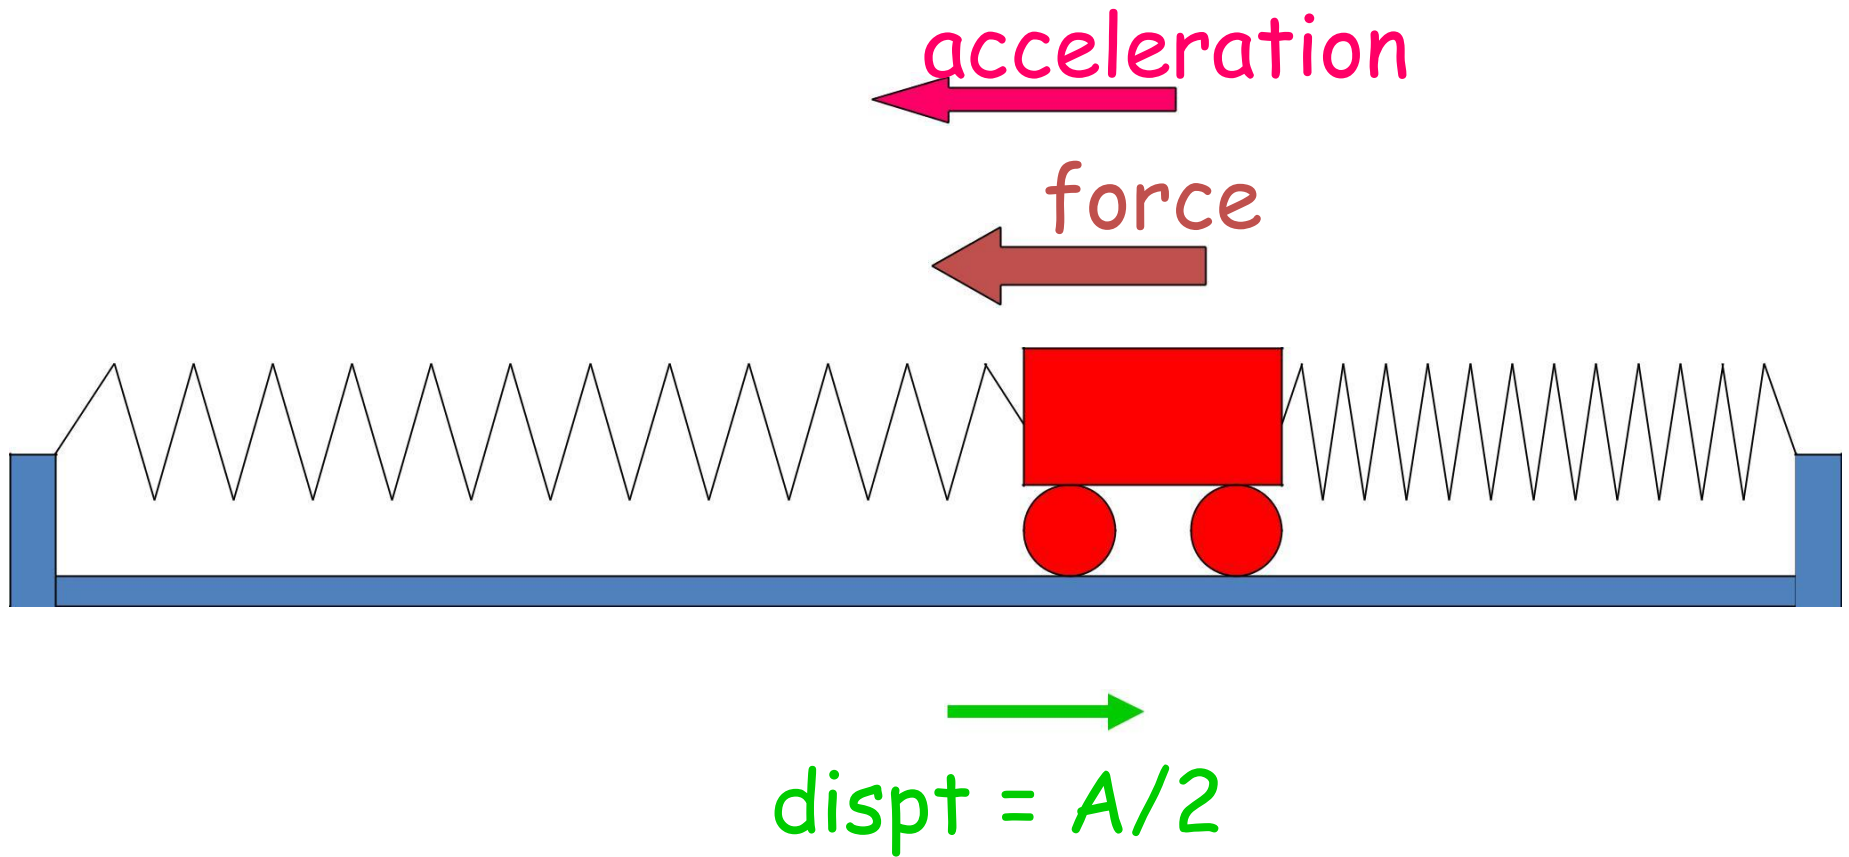

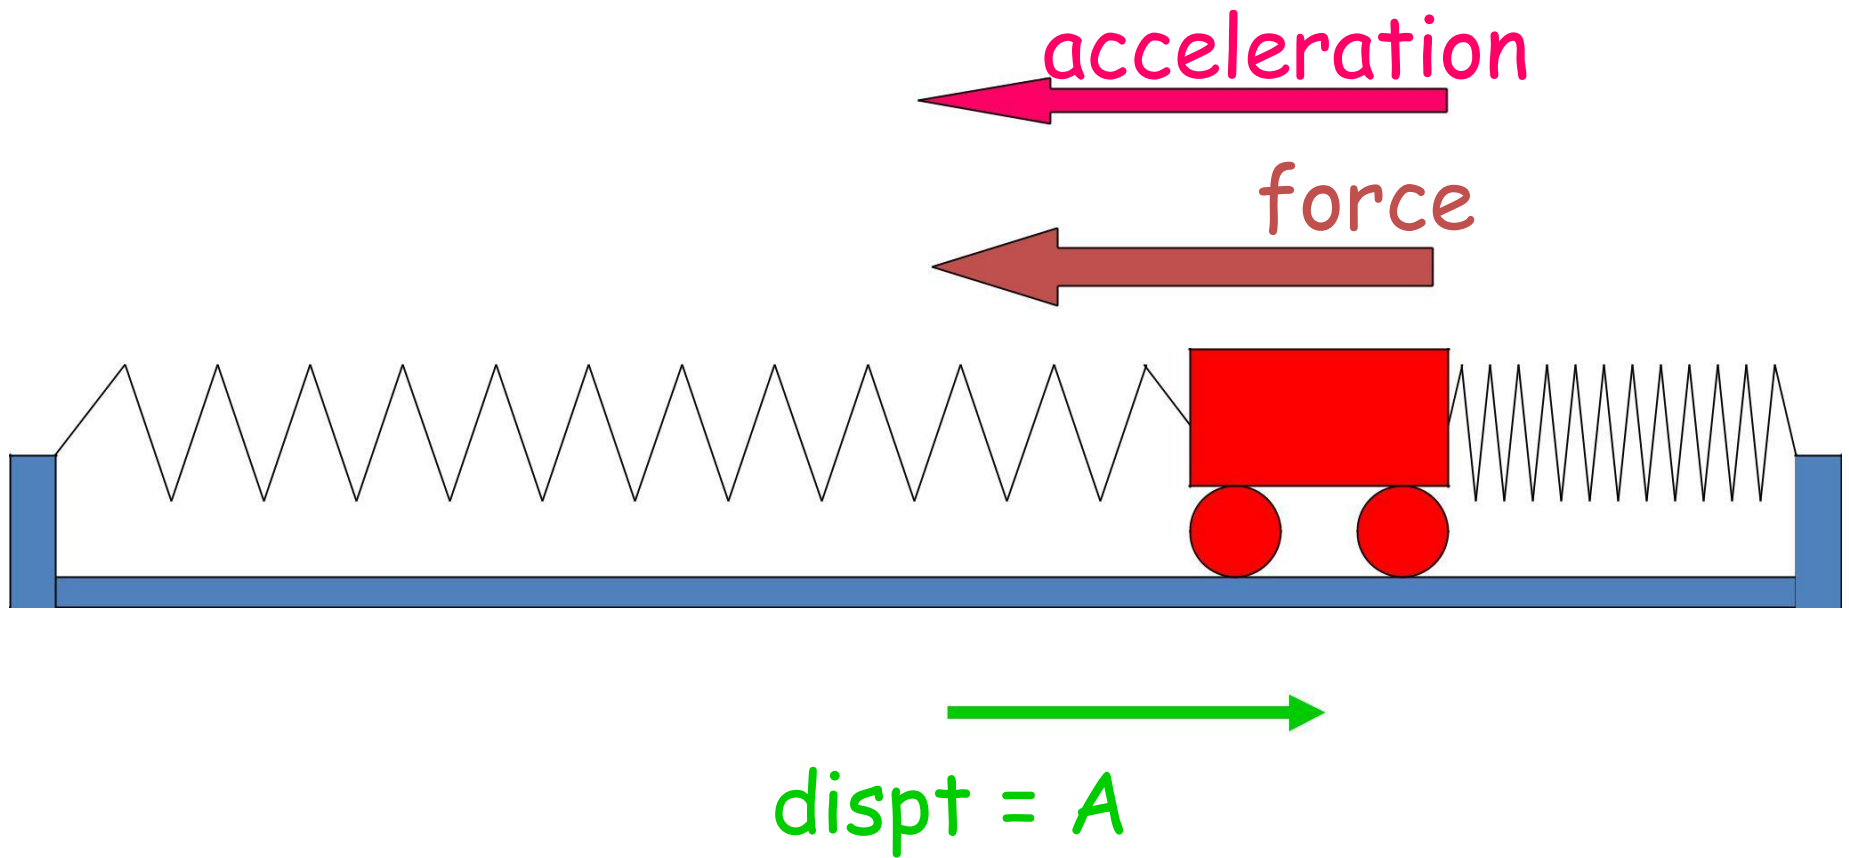

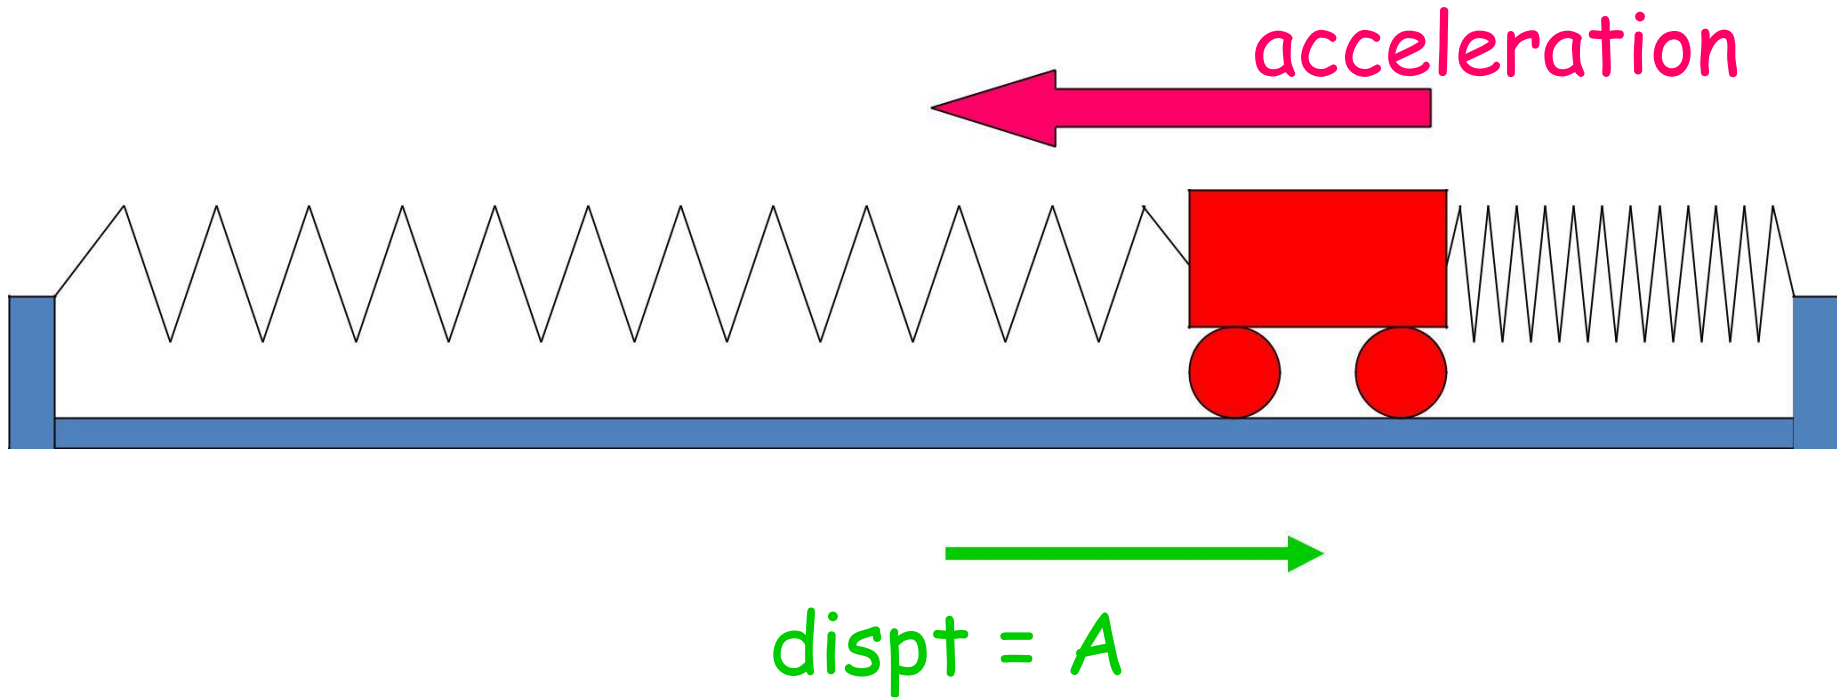

- Notice that as the **displacement** *increases*, the **acceleration** *increases*.
- Notice that the **acceleration** is always in the *opposite direction* to the **displacement**


- The relation between acceleration and displacement is
- Acceleration is proportional to displacement
- Acceleration is in opposite direction to displacement.

$$a = -\text{constant} \times y$$


$$a = -\omega^2 \times y$$

$$\omega = \frac{2\pi}{T}$$


Acceleration/position graph

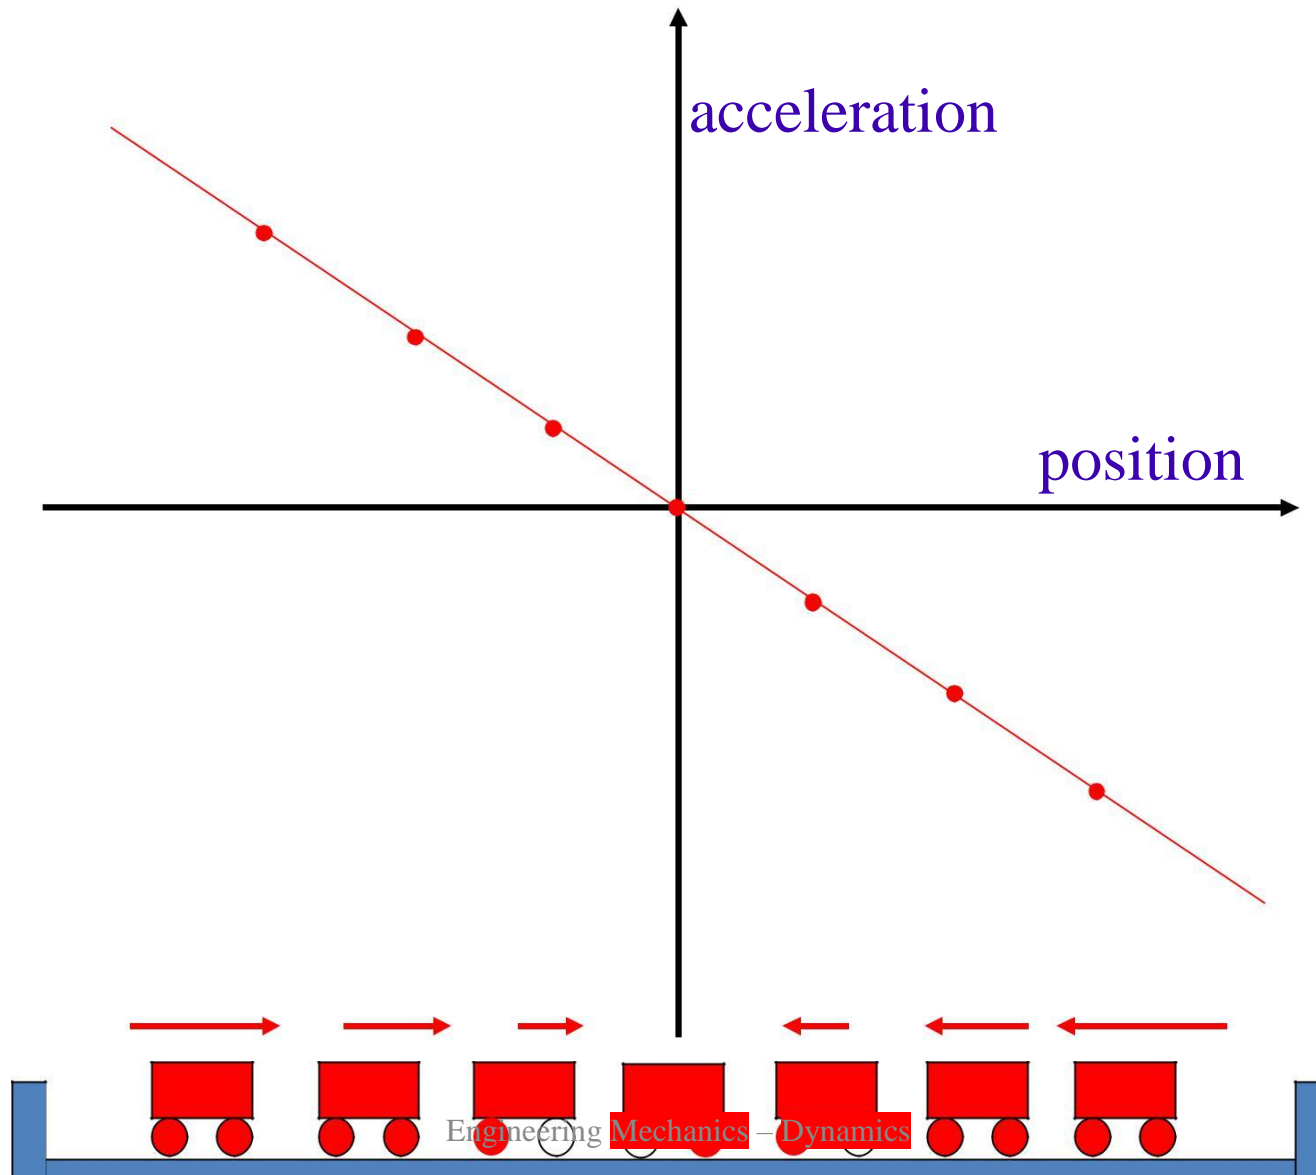

Acceleration/position graph

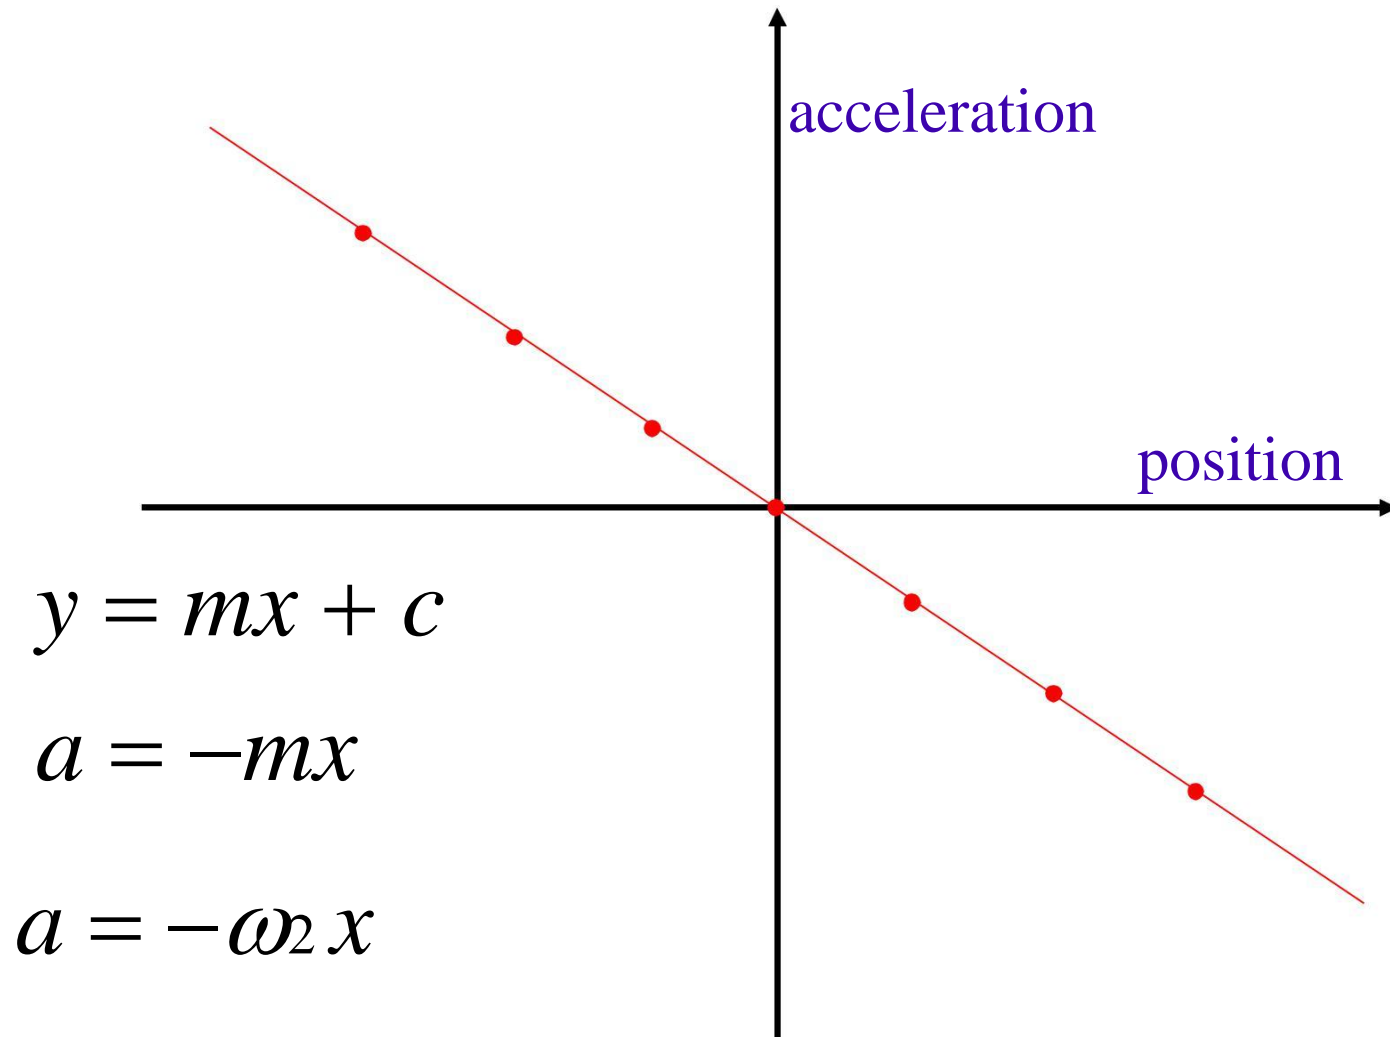


Force/position graph

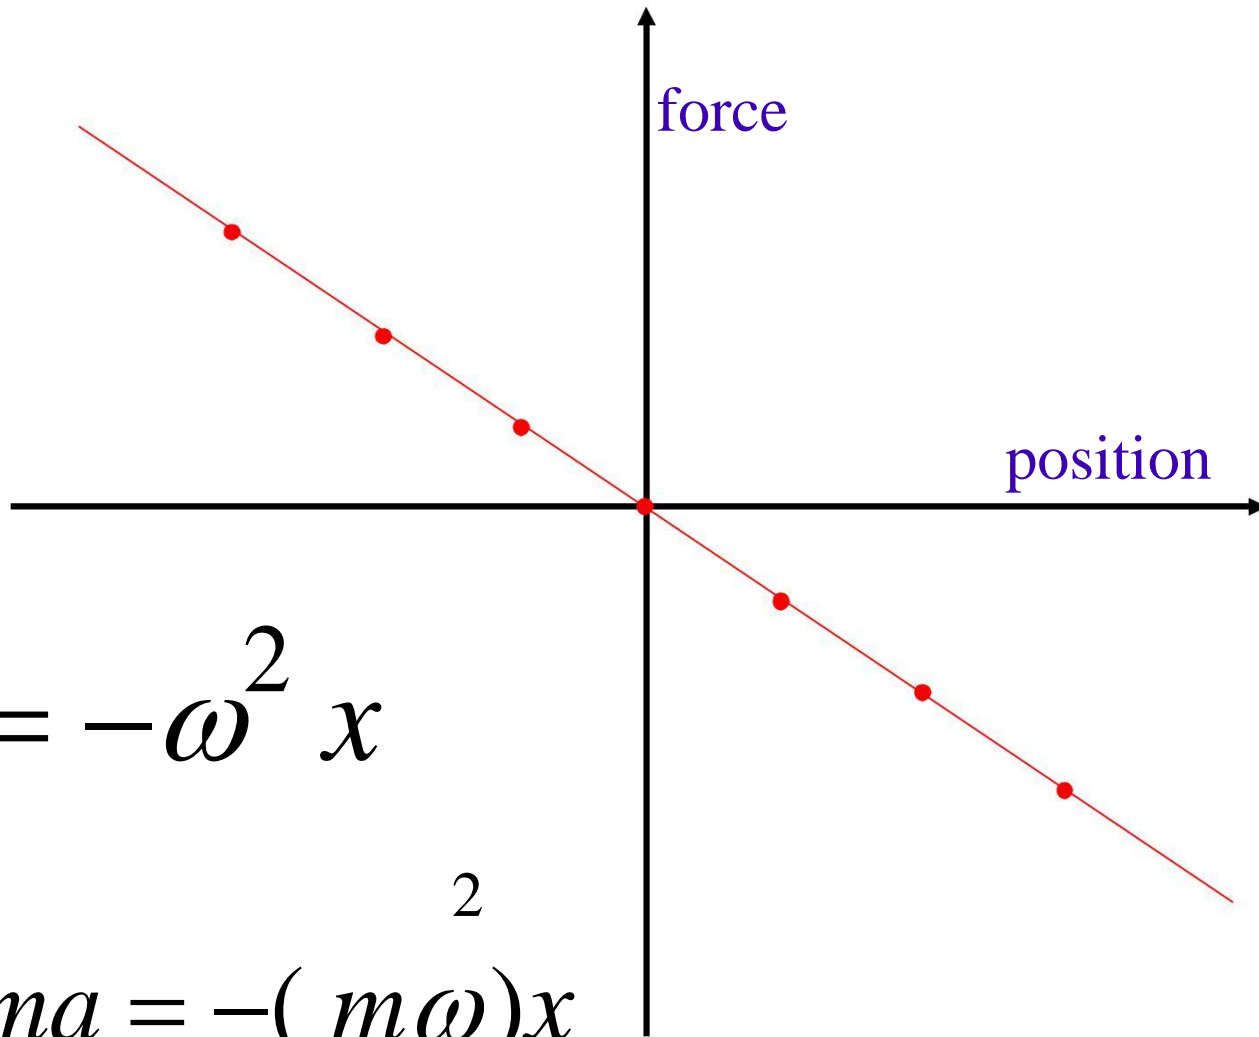


Graphs of SHM

- We have looked at simple harmonic motion as a function of *position*.
- Now we'll look at it as a function of *time*


displacement
 x

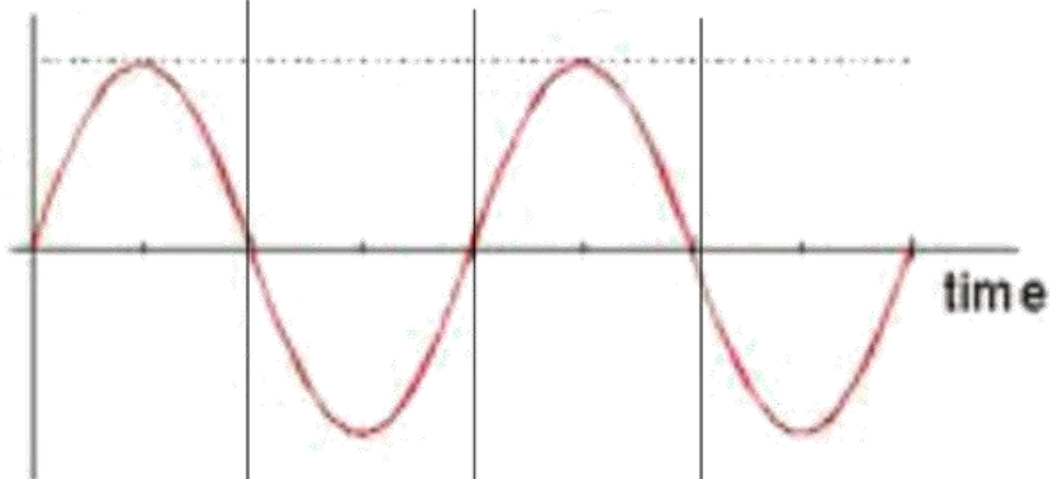

velocity
 v

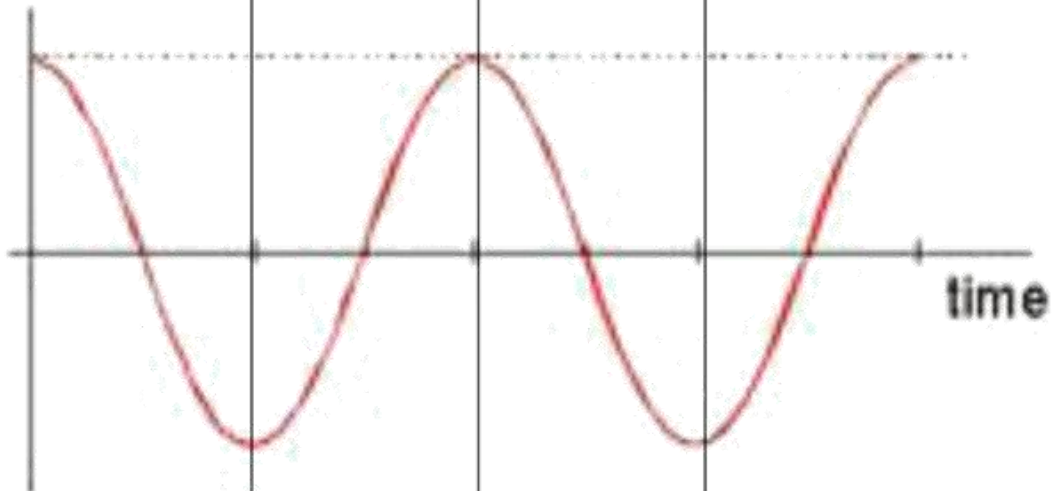


acceleration
 a

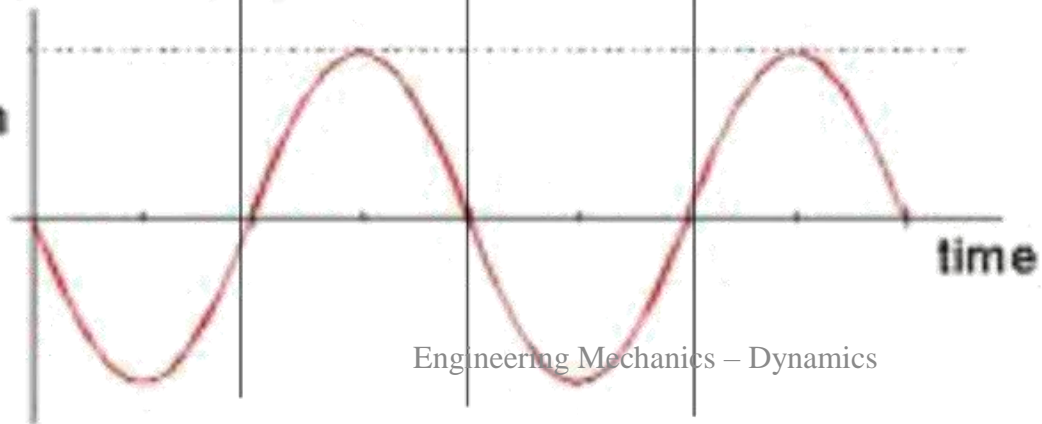


raphs


graphical treatment

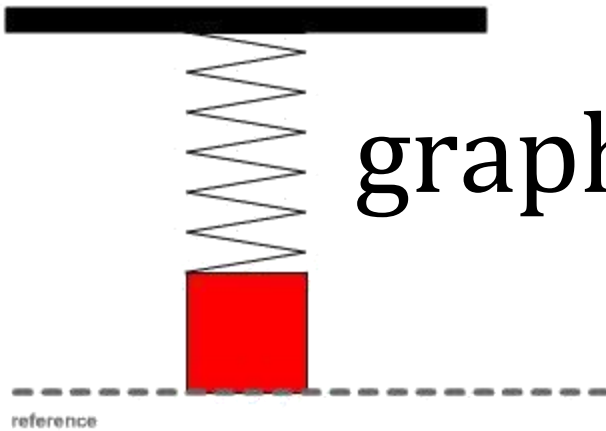


equilibrium
position

- ☒ none
- ☐ displacement
- ☐ velocity
- ☐ acceleration

 **mass**

 **spring constant**

 **damping**



pause

slow


reset

reference


01/01/2018

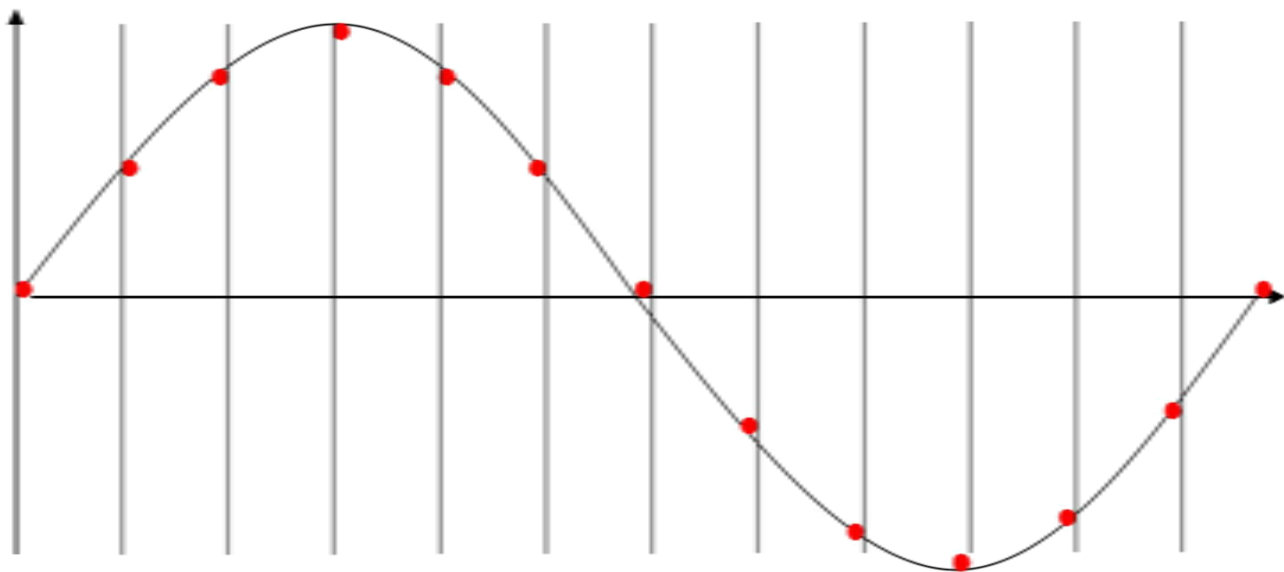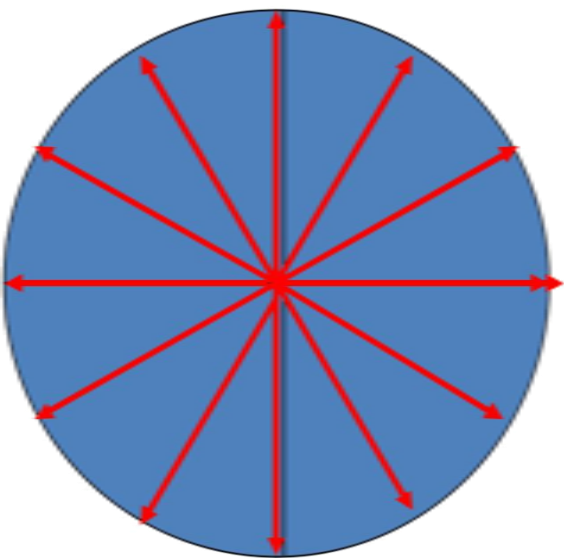

Reference Circle

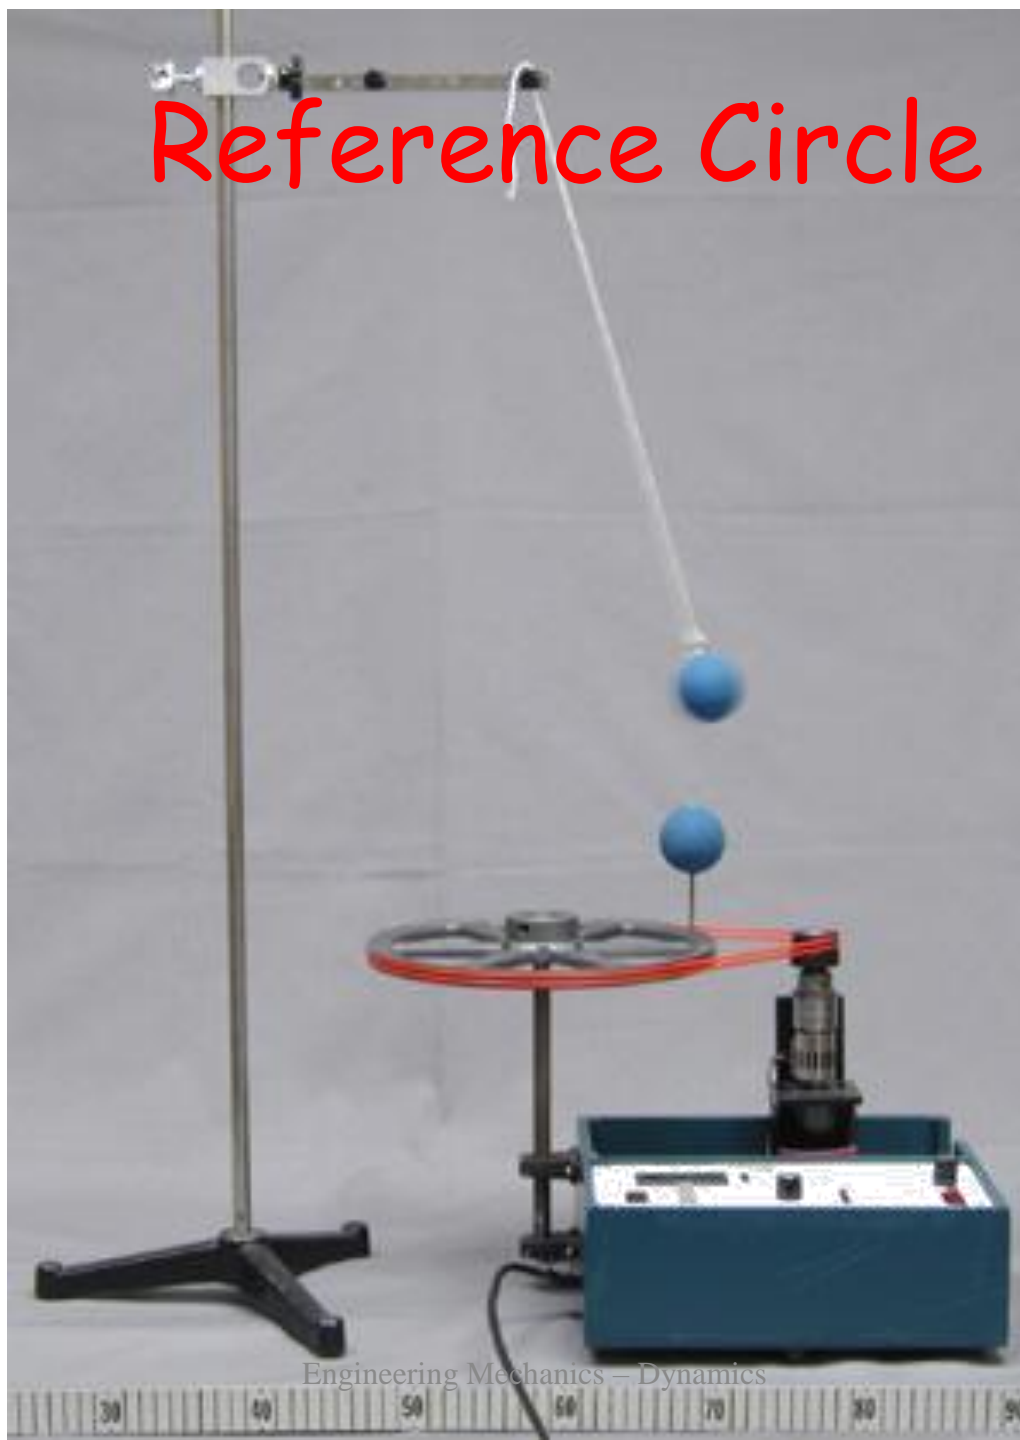

Reference Circle

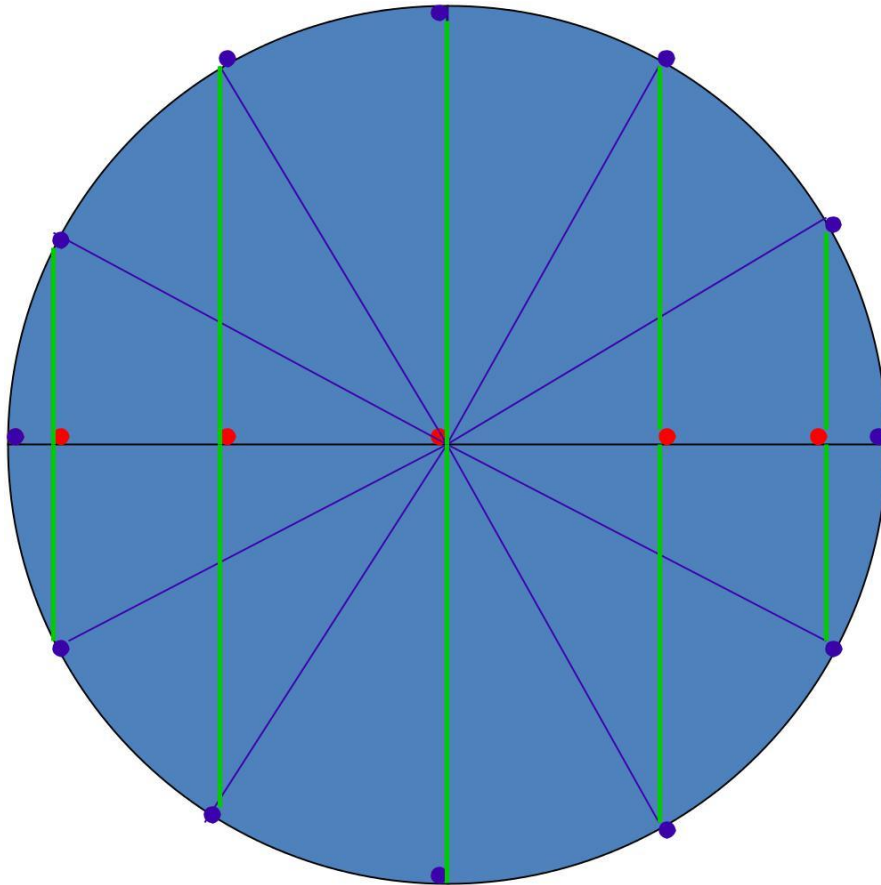

Red ball moves in SHM horizontally

Blue ball moves in a circle

Both have same period

Amplitude of SHM equals
radius of circle


Both have same *horizontal
displacement*

To find the **position** of a swing at a certain time.

The period is 4.0s

The amplitude is 2.0m


Where is the swing **2.0s** after release?

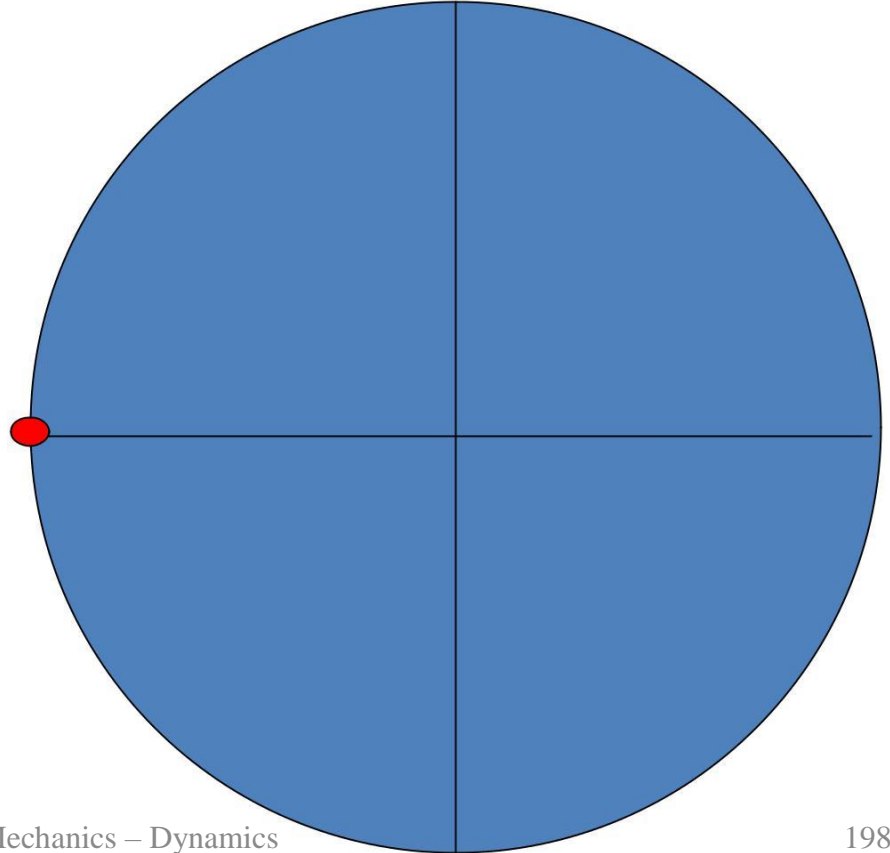

The period is 4.0s

The amplitude is 2.0m

Where is the swing **1.0s** after release?

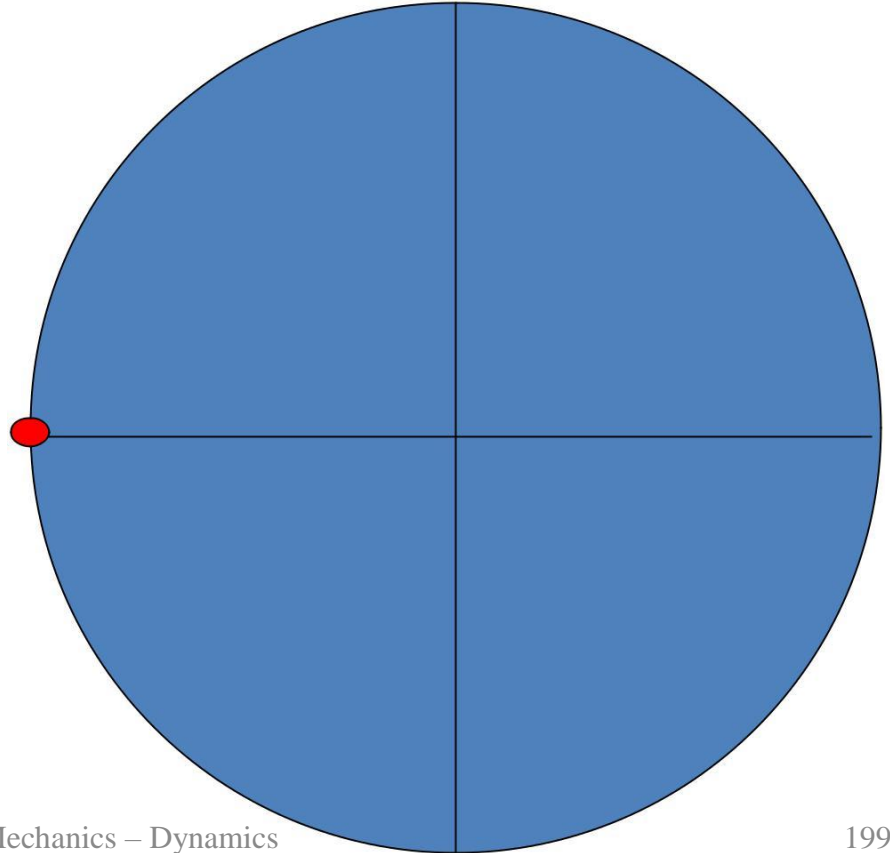


Where is the swing **0.5s** after release?

Convert time to angle (1period = 360°)

$$\frac{0.5}{4.0} \times 360^{\circ} = 45^{\circ}$$

$$0.50 \text{ s} = 45^{\circ}$$

$$\cos 45^{\circ} = \frac{x}{2}$$

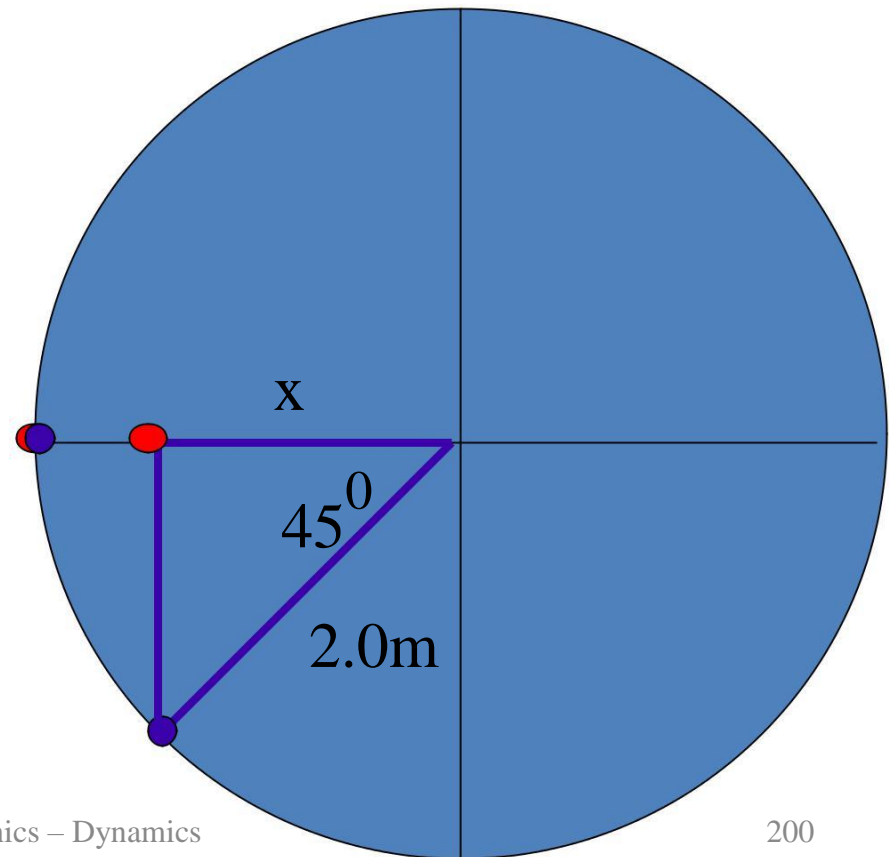


Where is the swing **2.5s** after release?

Convert time to angle (1period = 360°)

$$\frac{2.5}{4.0} \times 360^{\circ} = 225^{\circ}$$

$$2.50 \text{ s} = 225^{\circ}$$

$$\cos 45^{\circ} = \frac{x}{2}$$

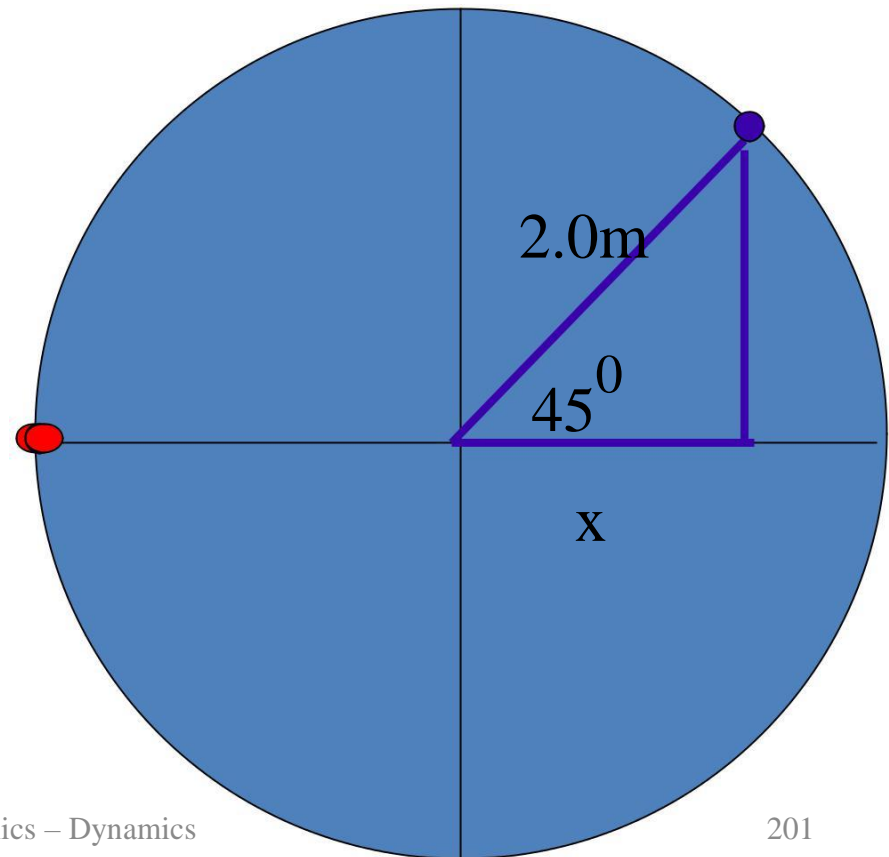

How long does it take to go 1.4m from the start?

(1) Calculate angle


$$\cos \theta = \frac{0.59}{2}$$

$$\theta =$$


(2) Convert angle to time
(1 period = 360°)

$$60^\circ = \frac{60}{360} \text{ of a period}$$

$$60^\circ = \cancel{16} \times 4.0s$$

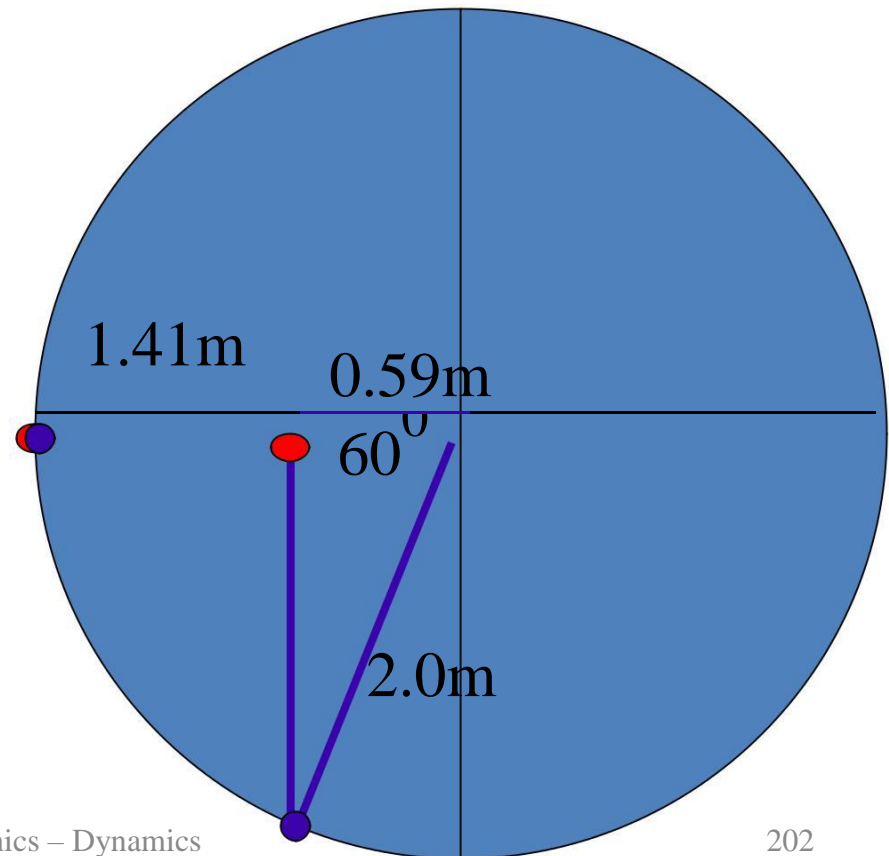

- The top of the sky tower is oscillating with an amplitude of 2.0 m and a period of 14 s.
- How long is it more than 0.80m from equilibrium each cycle?
- What is the horizontal acceleration when the displacement is maximum?

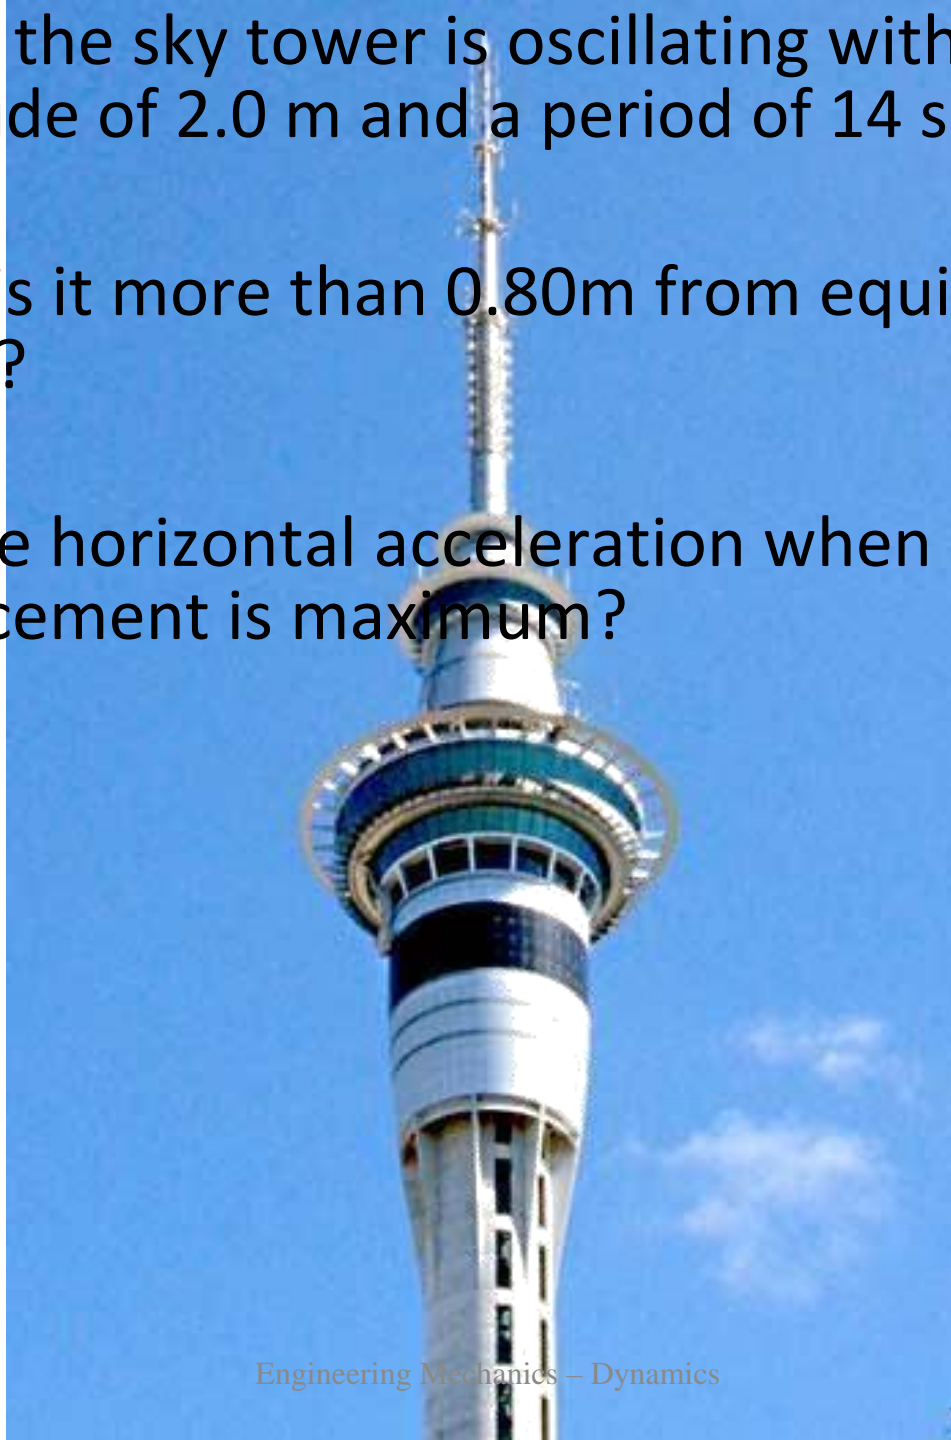

Equations 1


$$y = A \sin \theta$$

$$\theta = \omega t$$

$$y = A \sin \omega t$$

$$v = A \omega \cos \omega t$$

$$a = -A \omega^2 \sin \omega t$$

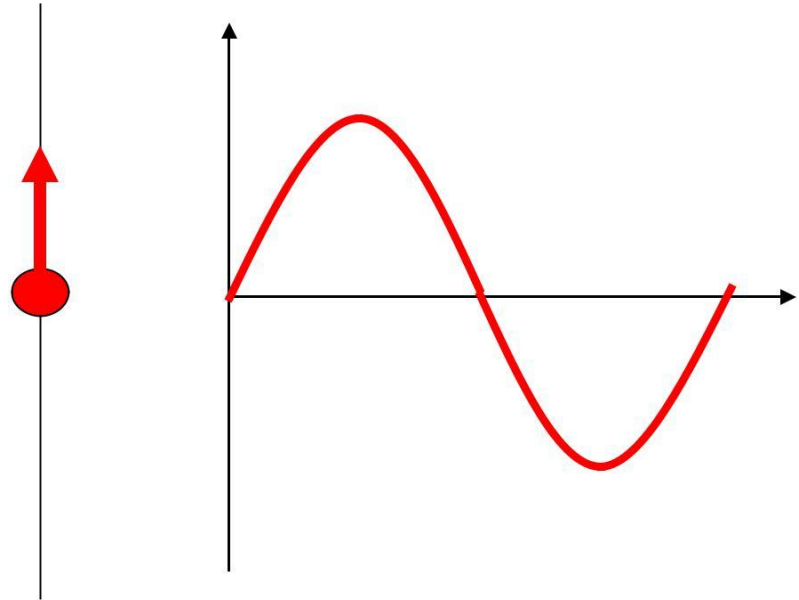


Equations 2

$$y = A \cos \omega t$$

$$v = -A \omega \sin \omega t$$

$$a = -A \omega^2 \cos \omega t$$

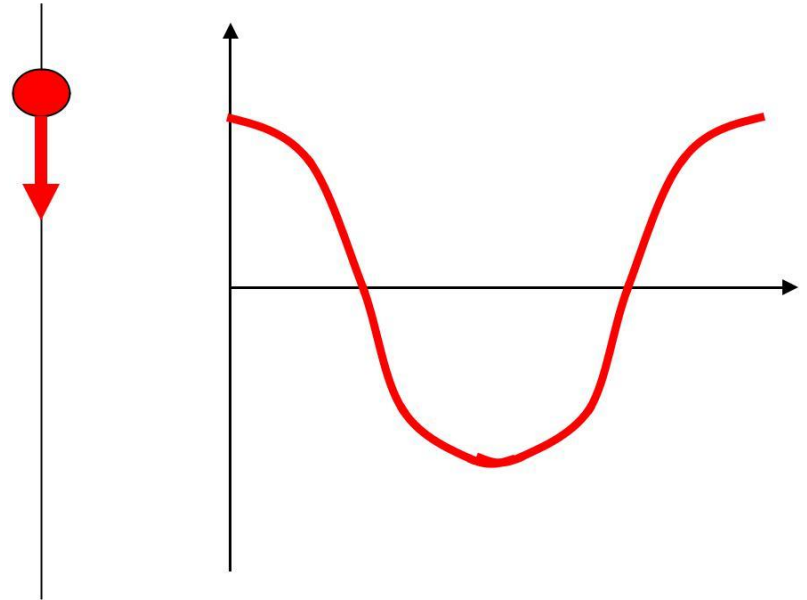


Equations 3

$$y = -A \cos \omega t$$

$$v = A \omega \sin \omega t$$

$$a = A \omega^2 \cos \omega t$$

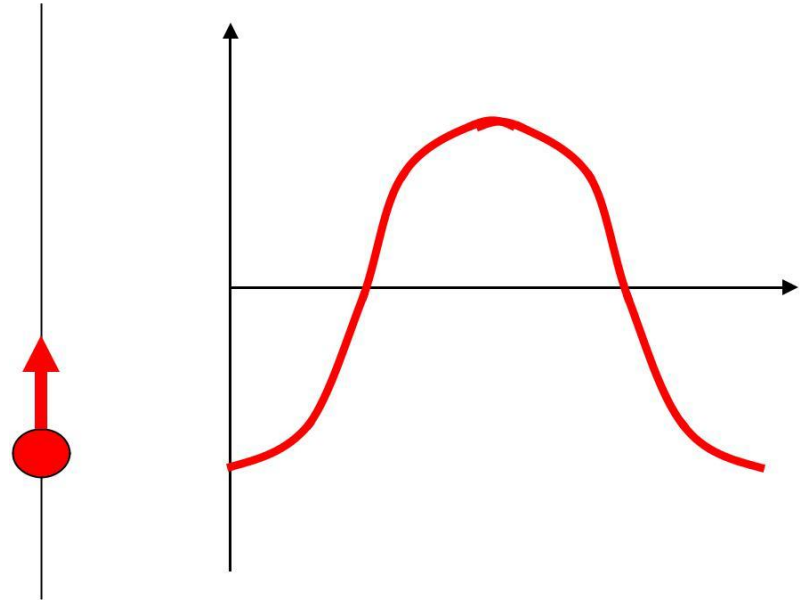

$$y = A \sin \omega t$$

$$y_{\max} = A$$

$$v = A \omega \cos \omega t$$

$$v_{\max} = A \omega$$

$$= -A \omega^2 \sin \omega t$$

$$a_{\max} = A \omega^2$$

$$a = -\omega^2 A \sin \omega t = -\omega^2 y$$

$$a = -\omega^2 y$$



Anisha is on a swing. Kate pulls her back 2.0m and lets her go. Her period is 4.0s.

(a) Calculate her maximum speed. (where is it?)

(b) Calculate her maximum acceleration. (where is it?)



Anisha is on a swing. Kate pulls her back 2.0m and lets her go. Her period is 4.0s.

- (a) Calculate her speed 0.50s after being released
- (b) Calculate her acceleration 0.50s after being released

- Nik is bungee jumping. In one oscillation he travels 12 m and it takes 8.0s.
 - Tahi starts videoing him as he passes through the mid position moving UP.
- (a) Calculate his velocity 1.0s after the video starts
- (b) Calculate his acceleration 2.0s after the video starts.

Mass on a Spring

- As the mass increases, the period... increases
- As the spring stiffness increases the period ... increases

Effect of mass:

$$a = \frac{F}{m}$$

- As the mass increases, the acceleration...
decreases (assuming constant force)
- As the acceleration decreases the period
... **increases**

A larger mass means a longer period.

Effect of spring stiffness:

$$a = \frac{F}{m} \qquad F = kx$$

- As the **stiffness** increases, the **restoring force**...
increases (assuming same displacement)
- As the **restoring force** increases the **acceleration** ...
increases
- As the **acceleration** increases the period ... **decreases**

A stiffer spring means a shorter period.

Summary

- mass \uparrow accel \downarrow period \uparrow
- stiffness \uparrow force \uparrow accel \uparrow period \downarrow

equation

$$T = 2\pi \sqrt{\frac{m}{k}}$$

Extensionderivation of the equation:
consider a mass on a spring.

$$a = \frac{F}{m} \quad F = -kx$$


$$a = \frac{-kx}{m} \quad a = -\frac{k}{m}x \quad (i.e. \ a \propto -x)$$

$$a = \frac{-k}{m}x \quad a = -\omega^2 x$$

$$\frac{k}{m} = \omega^2 = \left(\frac{2\pi}{T} \right)^2$$

$$\sqrt{\frac{k}{m}} = \frac{2\pi}{T} \quad T = 2\pi \sqrt{\frac{m}{k}}$$


energy of motion

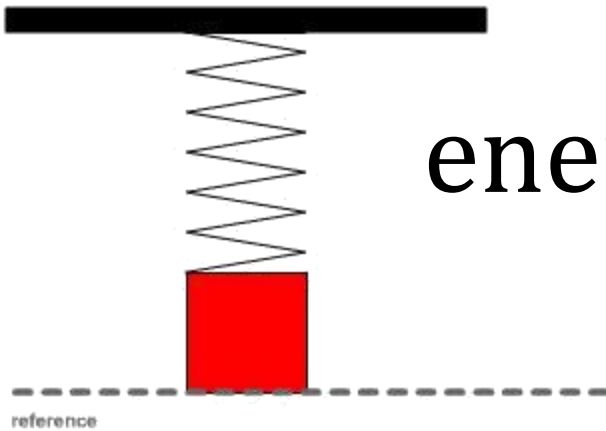


equilibrium
position

- ☒ none
- ☐ g.p.e.
- ☐ strain
- ☐ total potential
- ☐ kinetic

 **mass**

 **spring constant**

 **damping**


pause

slow


reset

Simple Pendulum


- This is where all the mass is concentrated in one point.

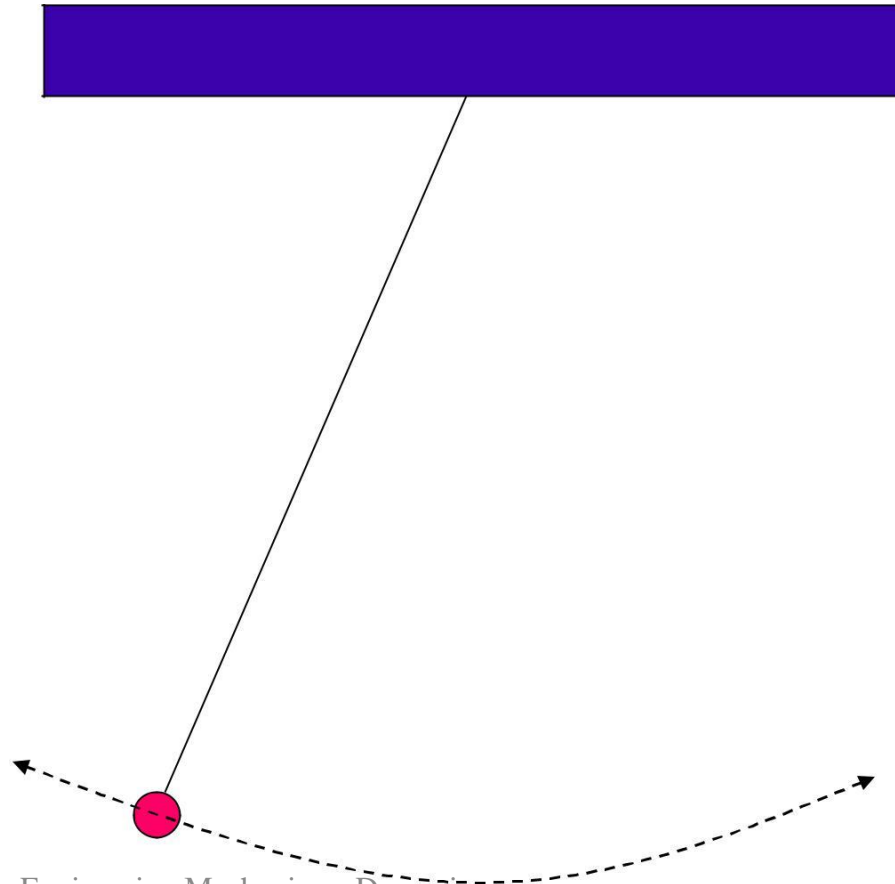


What provides the restoring force?

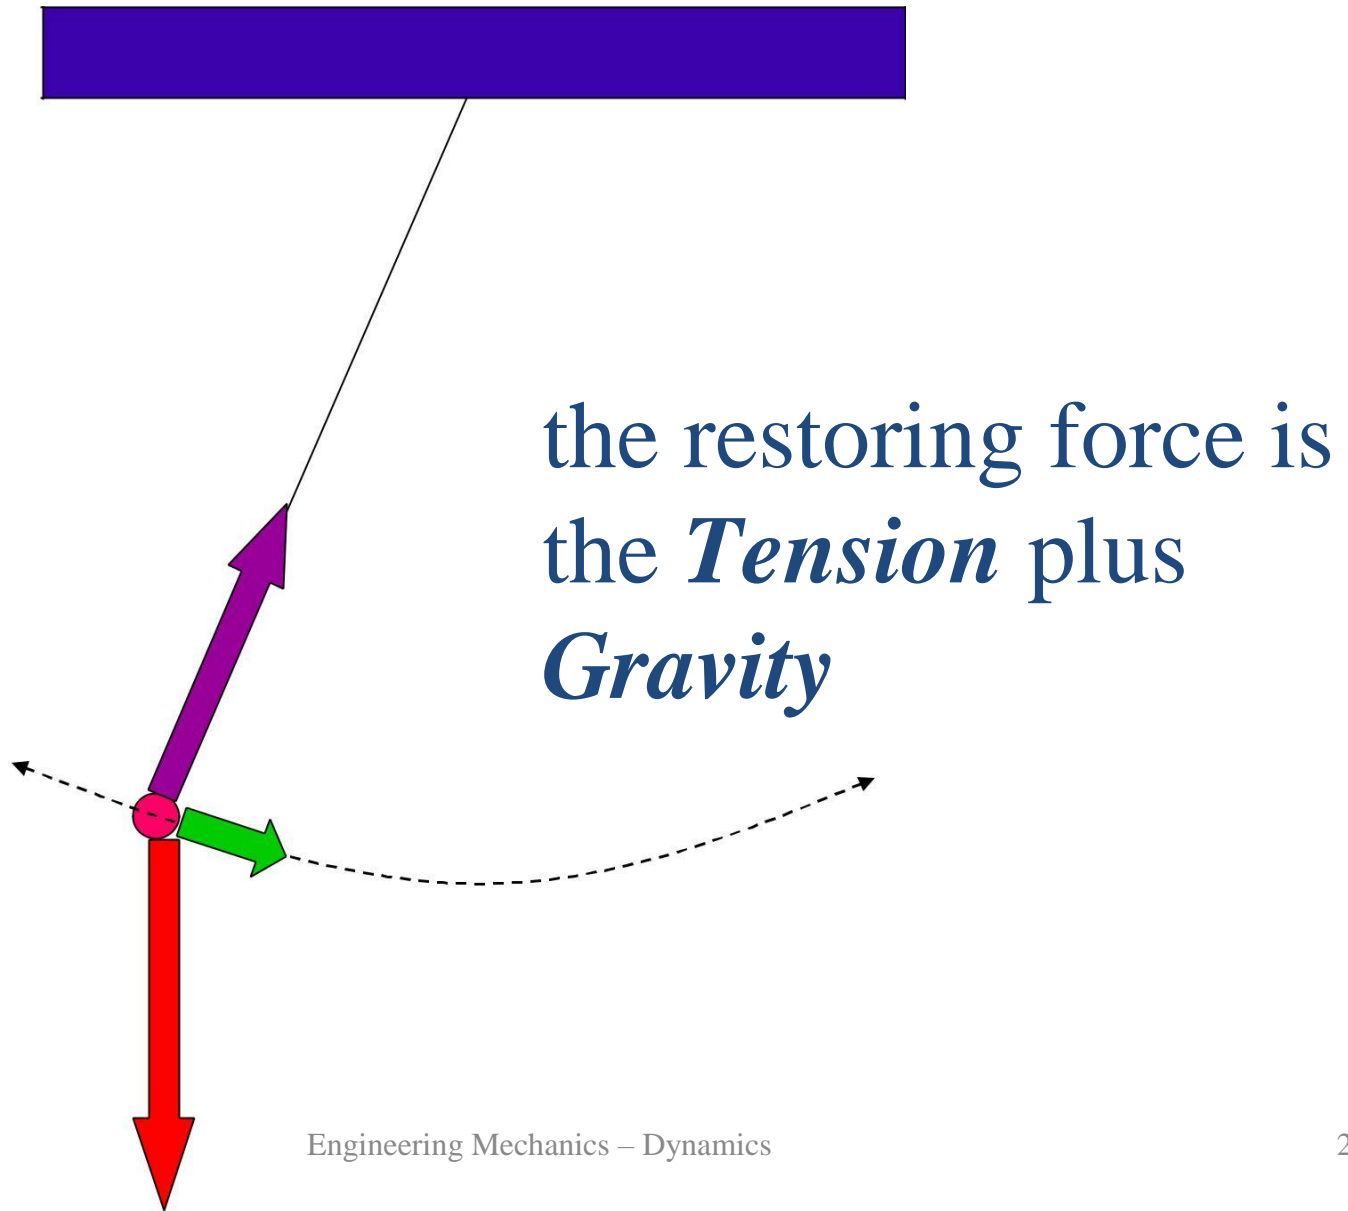


Why is the motion SHM?

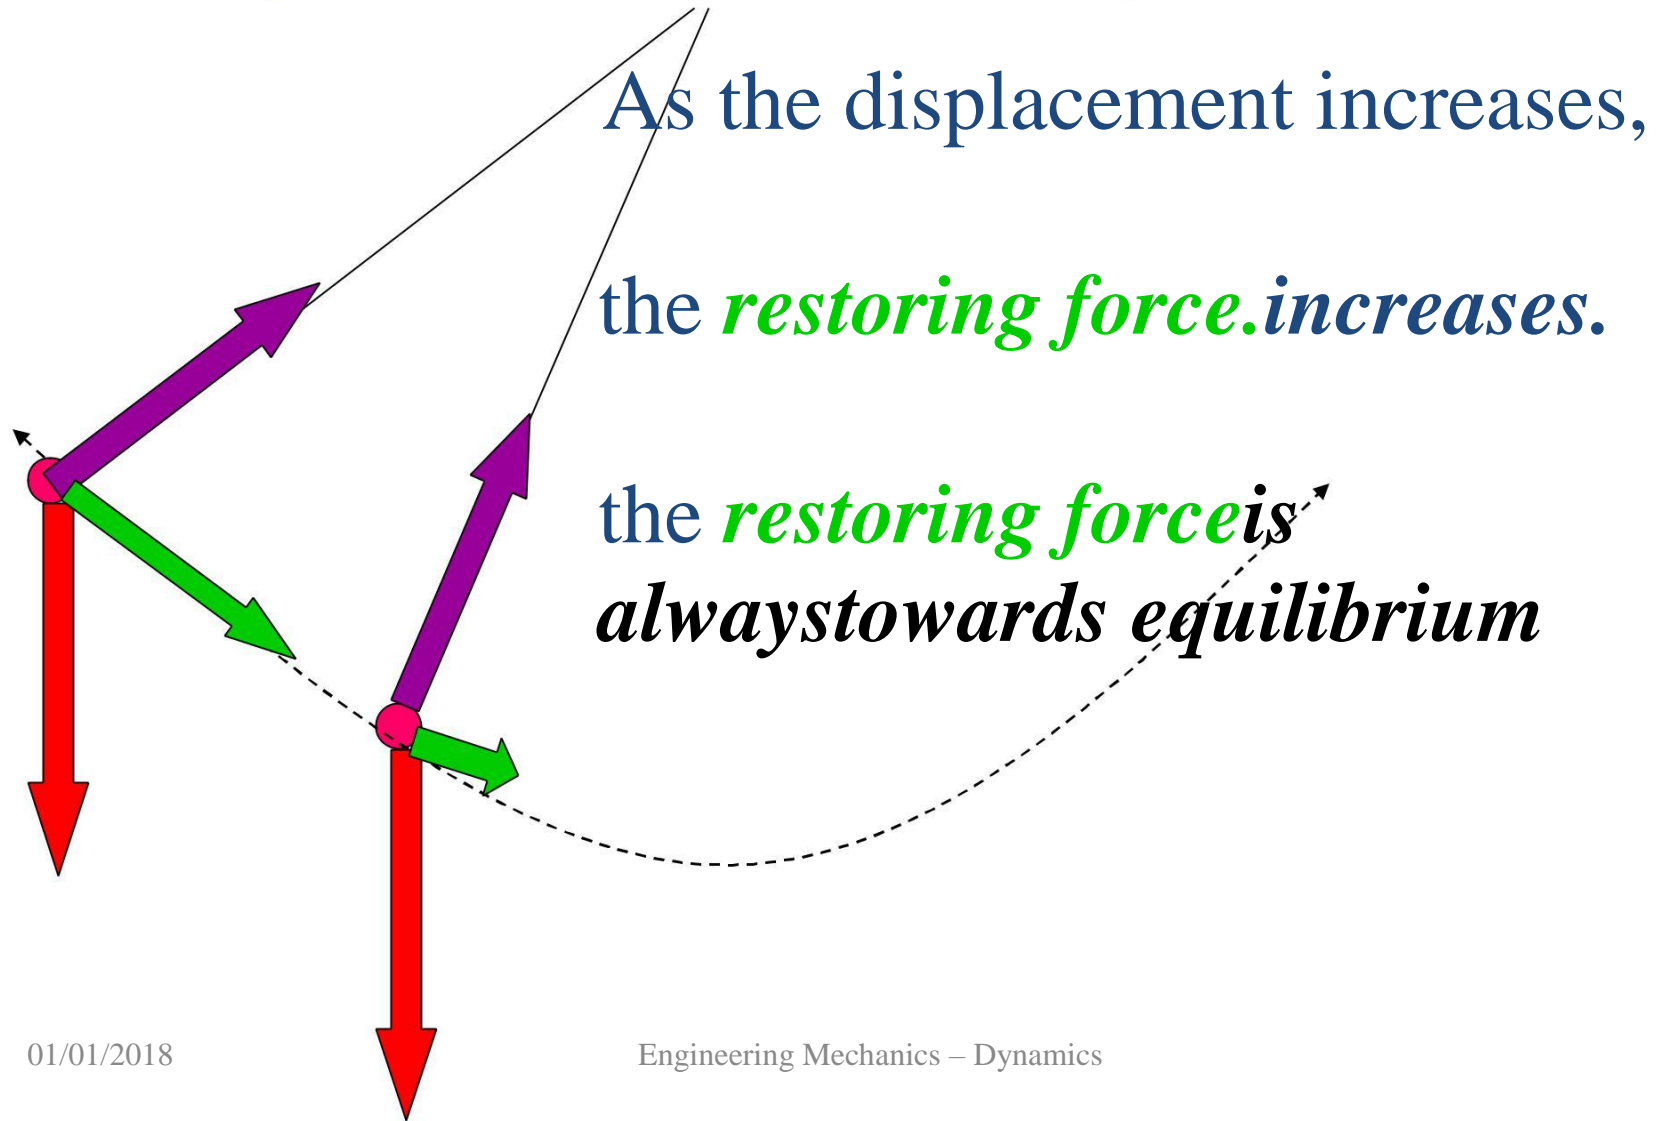

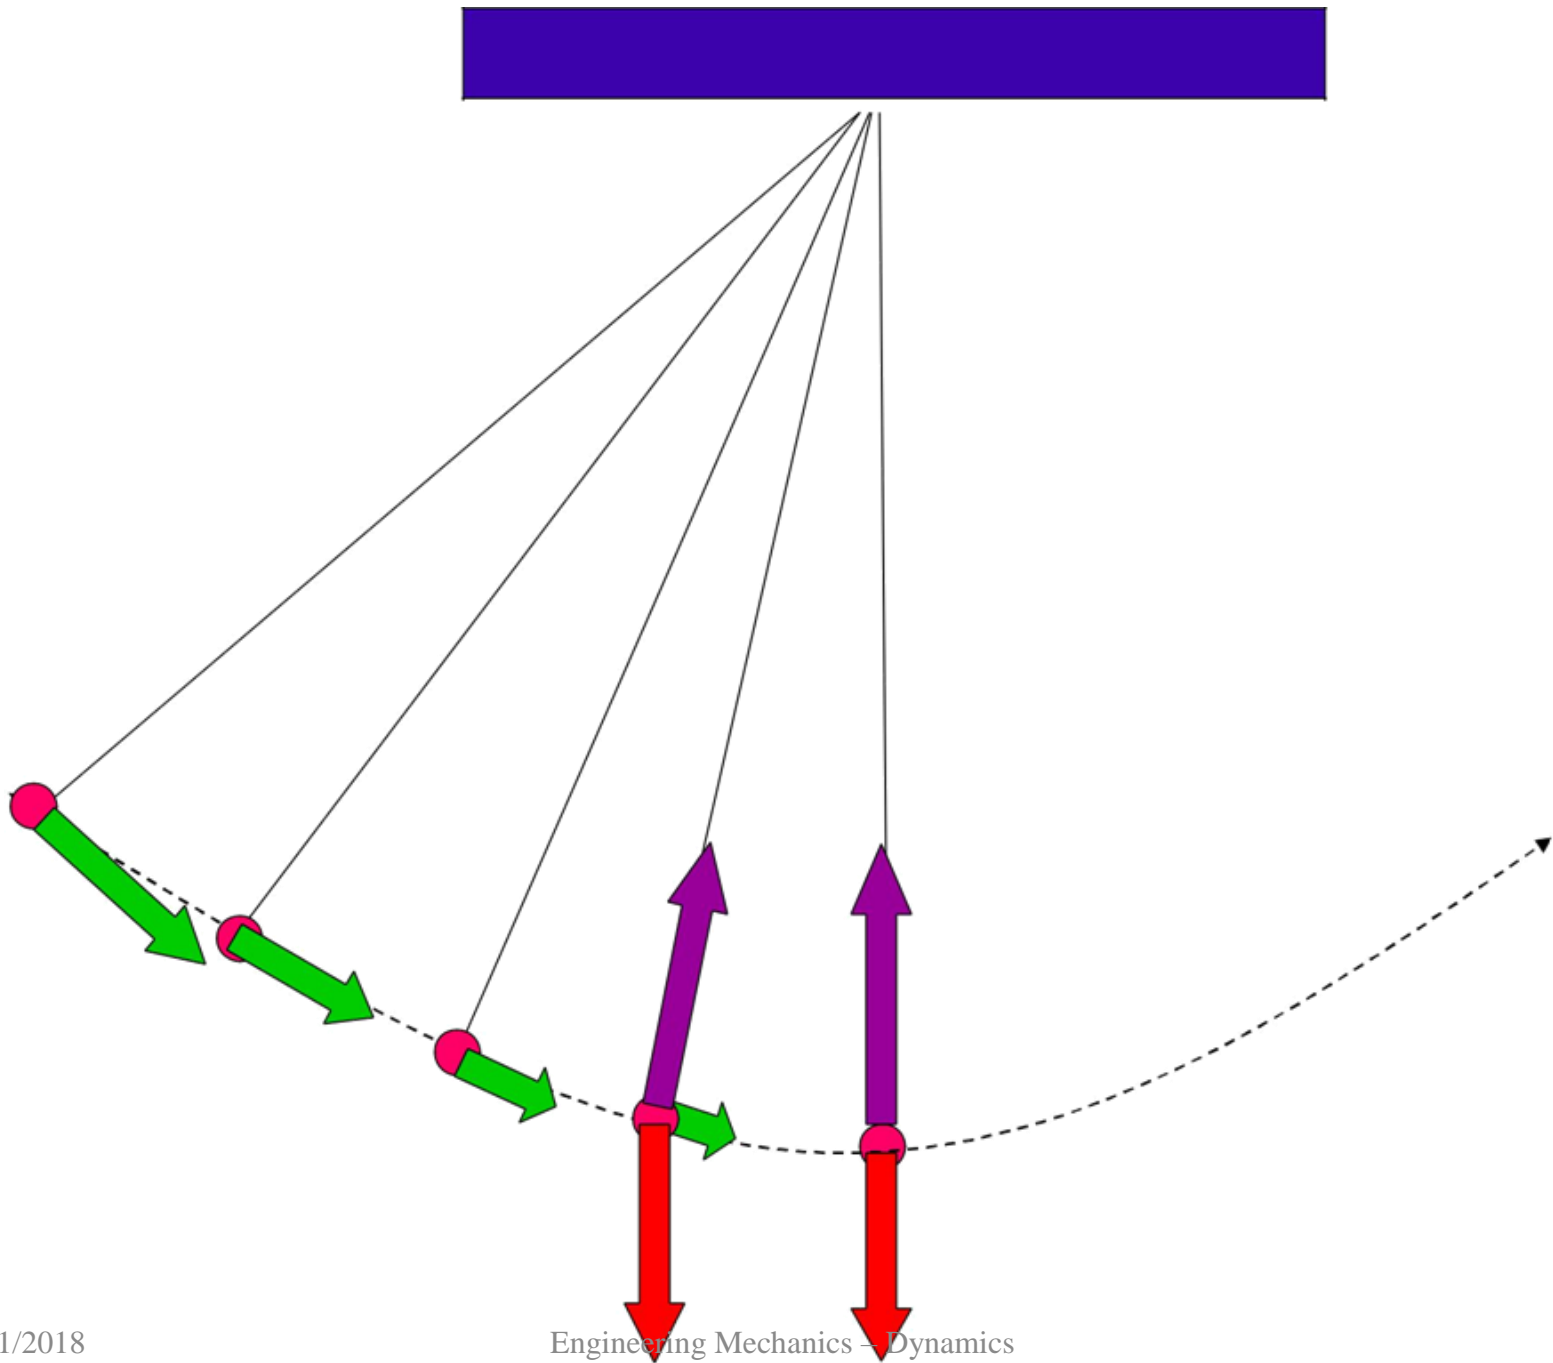

- This next bit is very important

Why does **length** affect **period**?

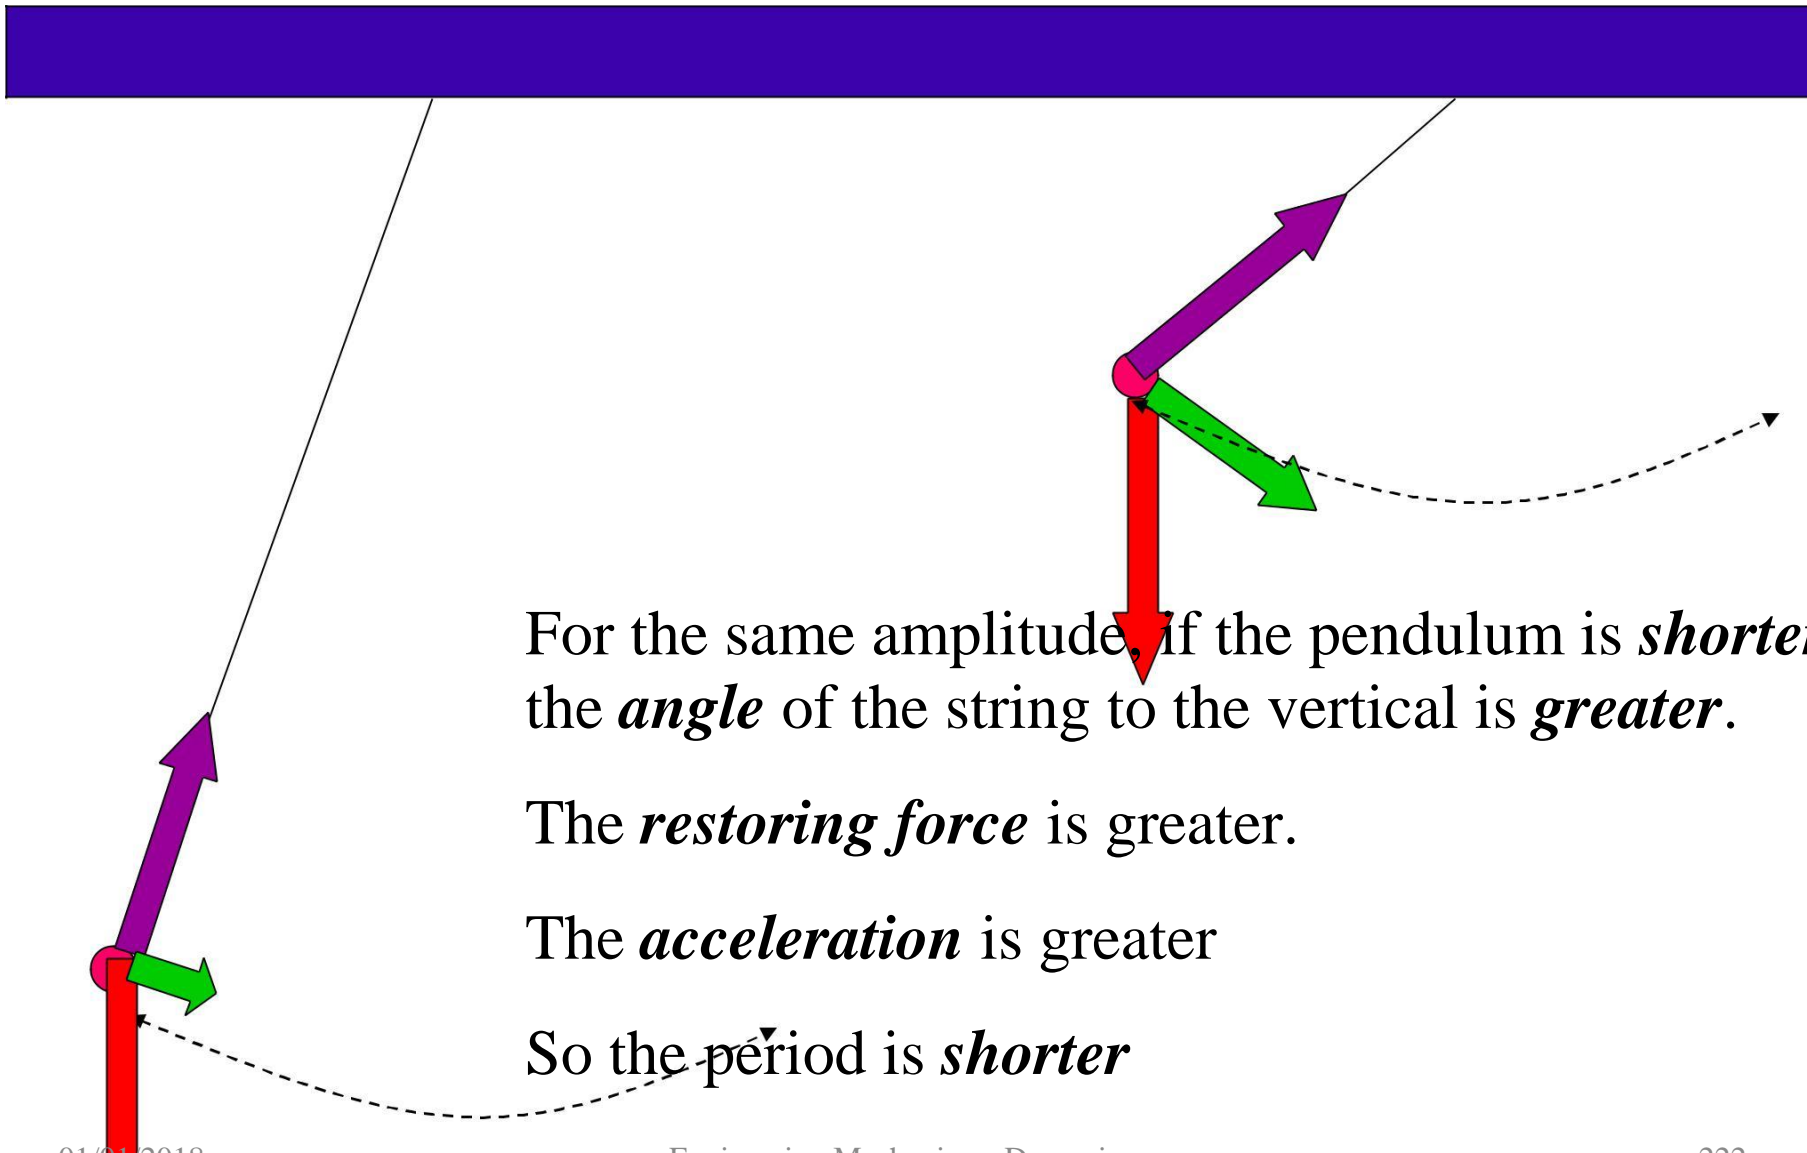


For the same amplitude, if the pendulum is *shorter*, the *angle* of the string to the vertical is *greater*.

The *restoring force* is greater.

The *acceleration* is greater

So the period is *shorter*

period of a pendulum

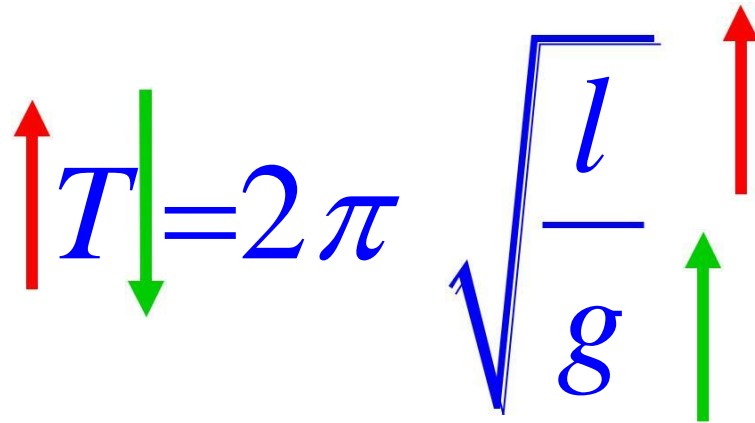

The diagram shows the formula for the period of a pendulum, $T = 2\pi \sqrt{\frac{l}{g}}$, with red arrows pointing up and green arrows pointing down next to the variables T and g respectively. The length l is represented by a blue line segment with a red arrow pointing up and a green arrow pointing down.

$$T = 2\pi \sqrt{\frac{l}{g}}$$

How is *length* measured?



As the pendulum expands
down,


The mercury expands up

This keeps the center of
mass in the same place

Same length same period.

Energy of SHM


energy of motion

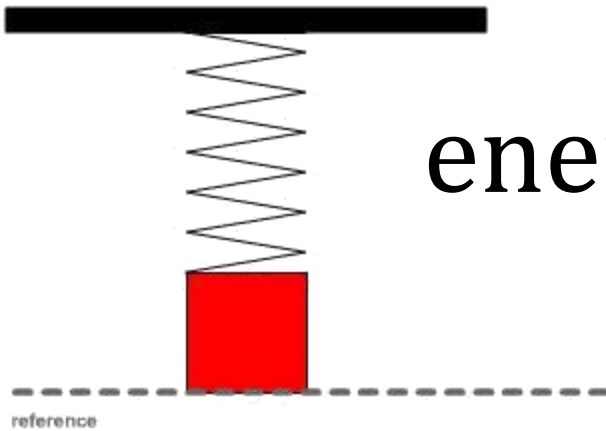


equilibrium
position

- ☒ none
- ☐ g.p.e.
- ☐ strain
- ☐ total potential
- ☐ kinetic

 **mass**

 **spring constant**


 **damping**

pause


slow

reset

a sprung system

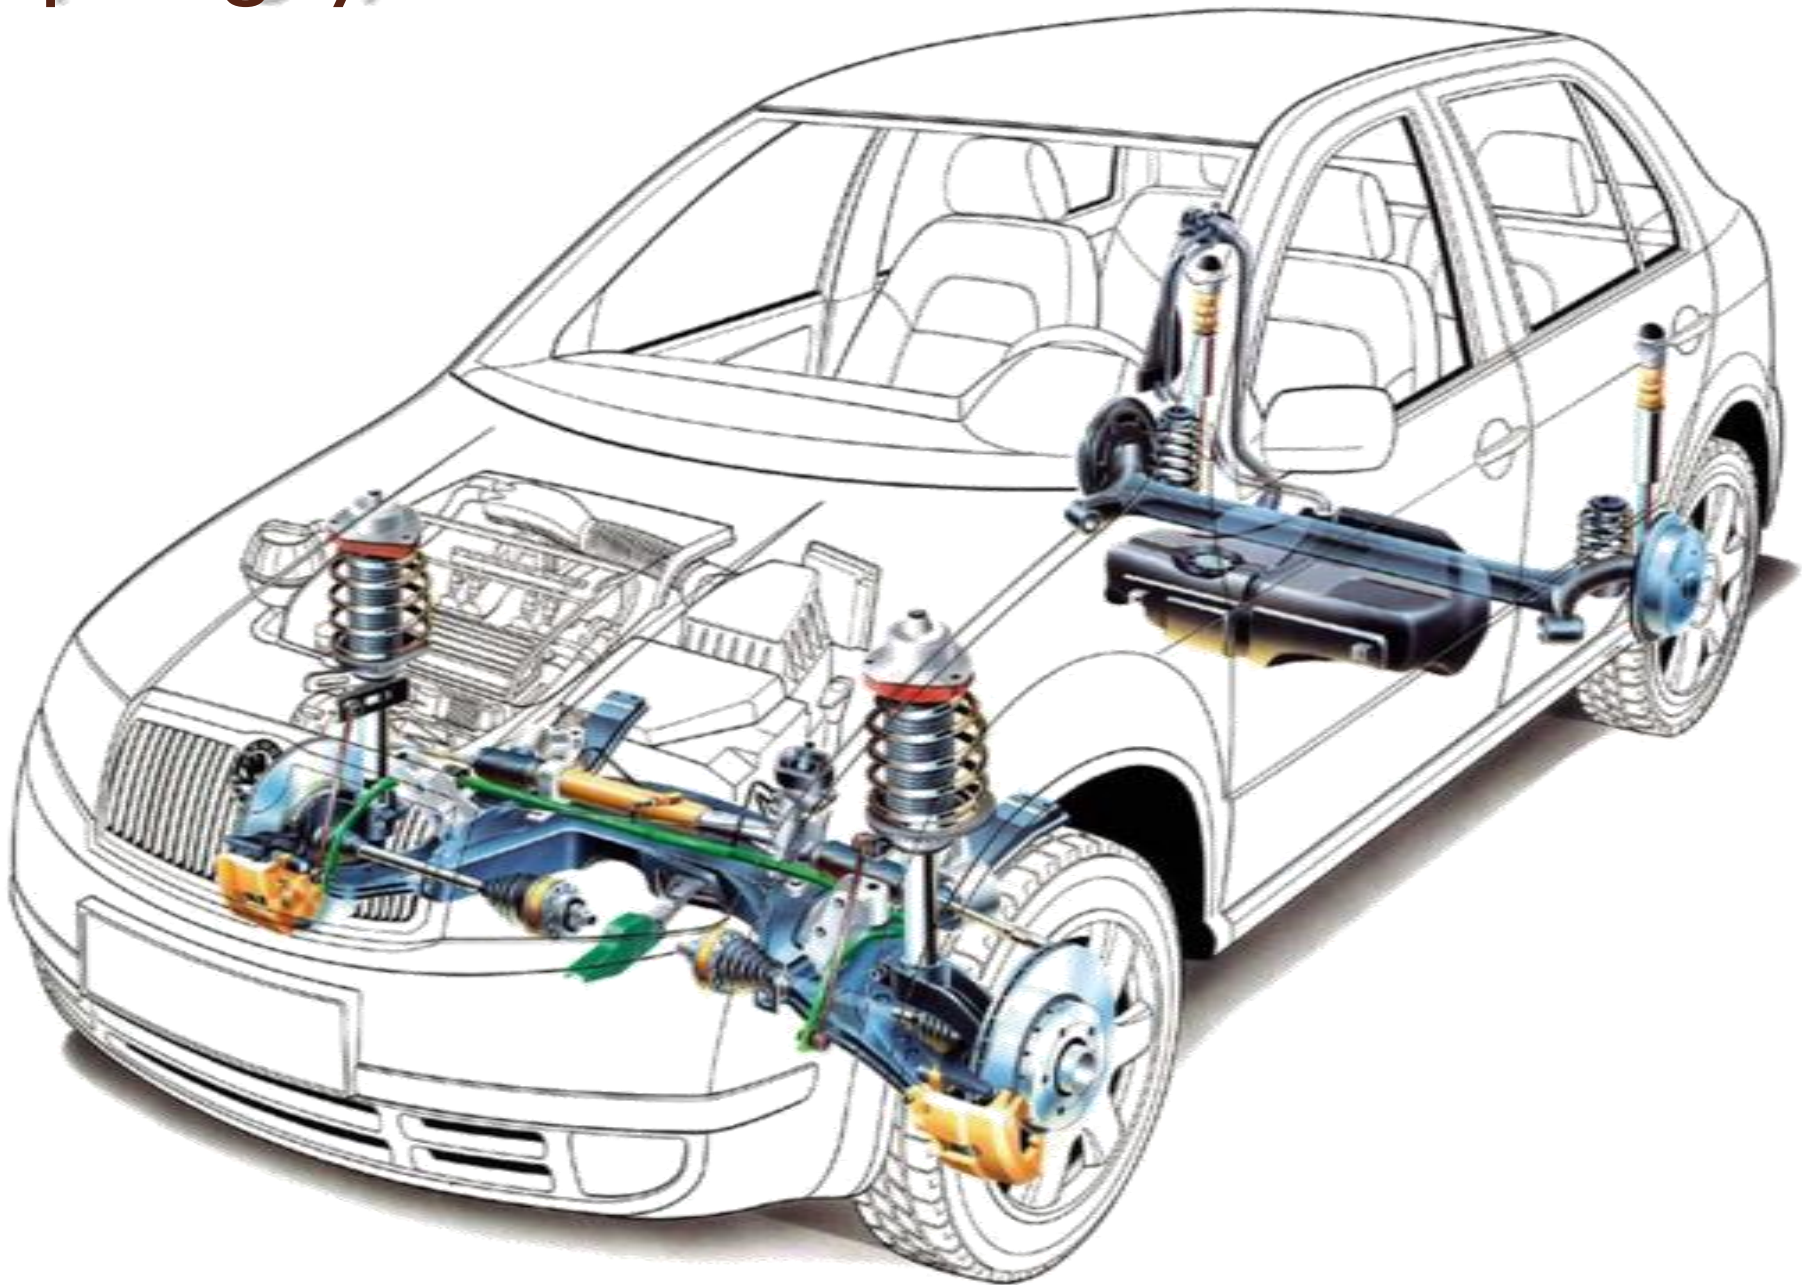


dampers

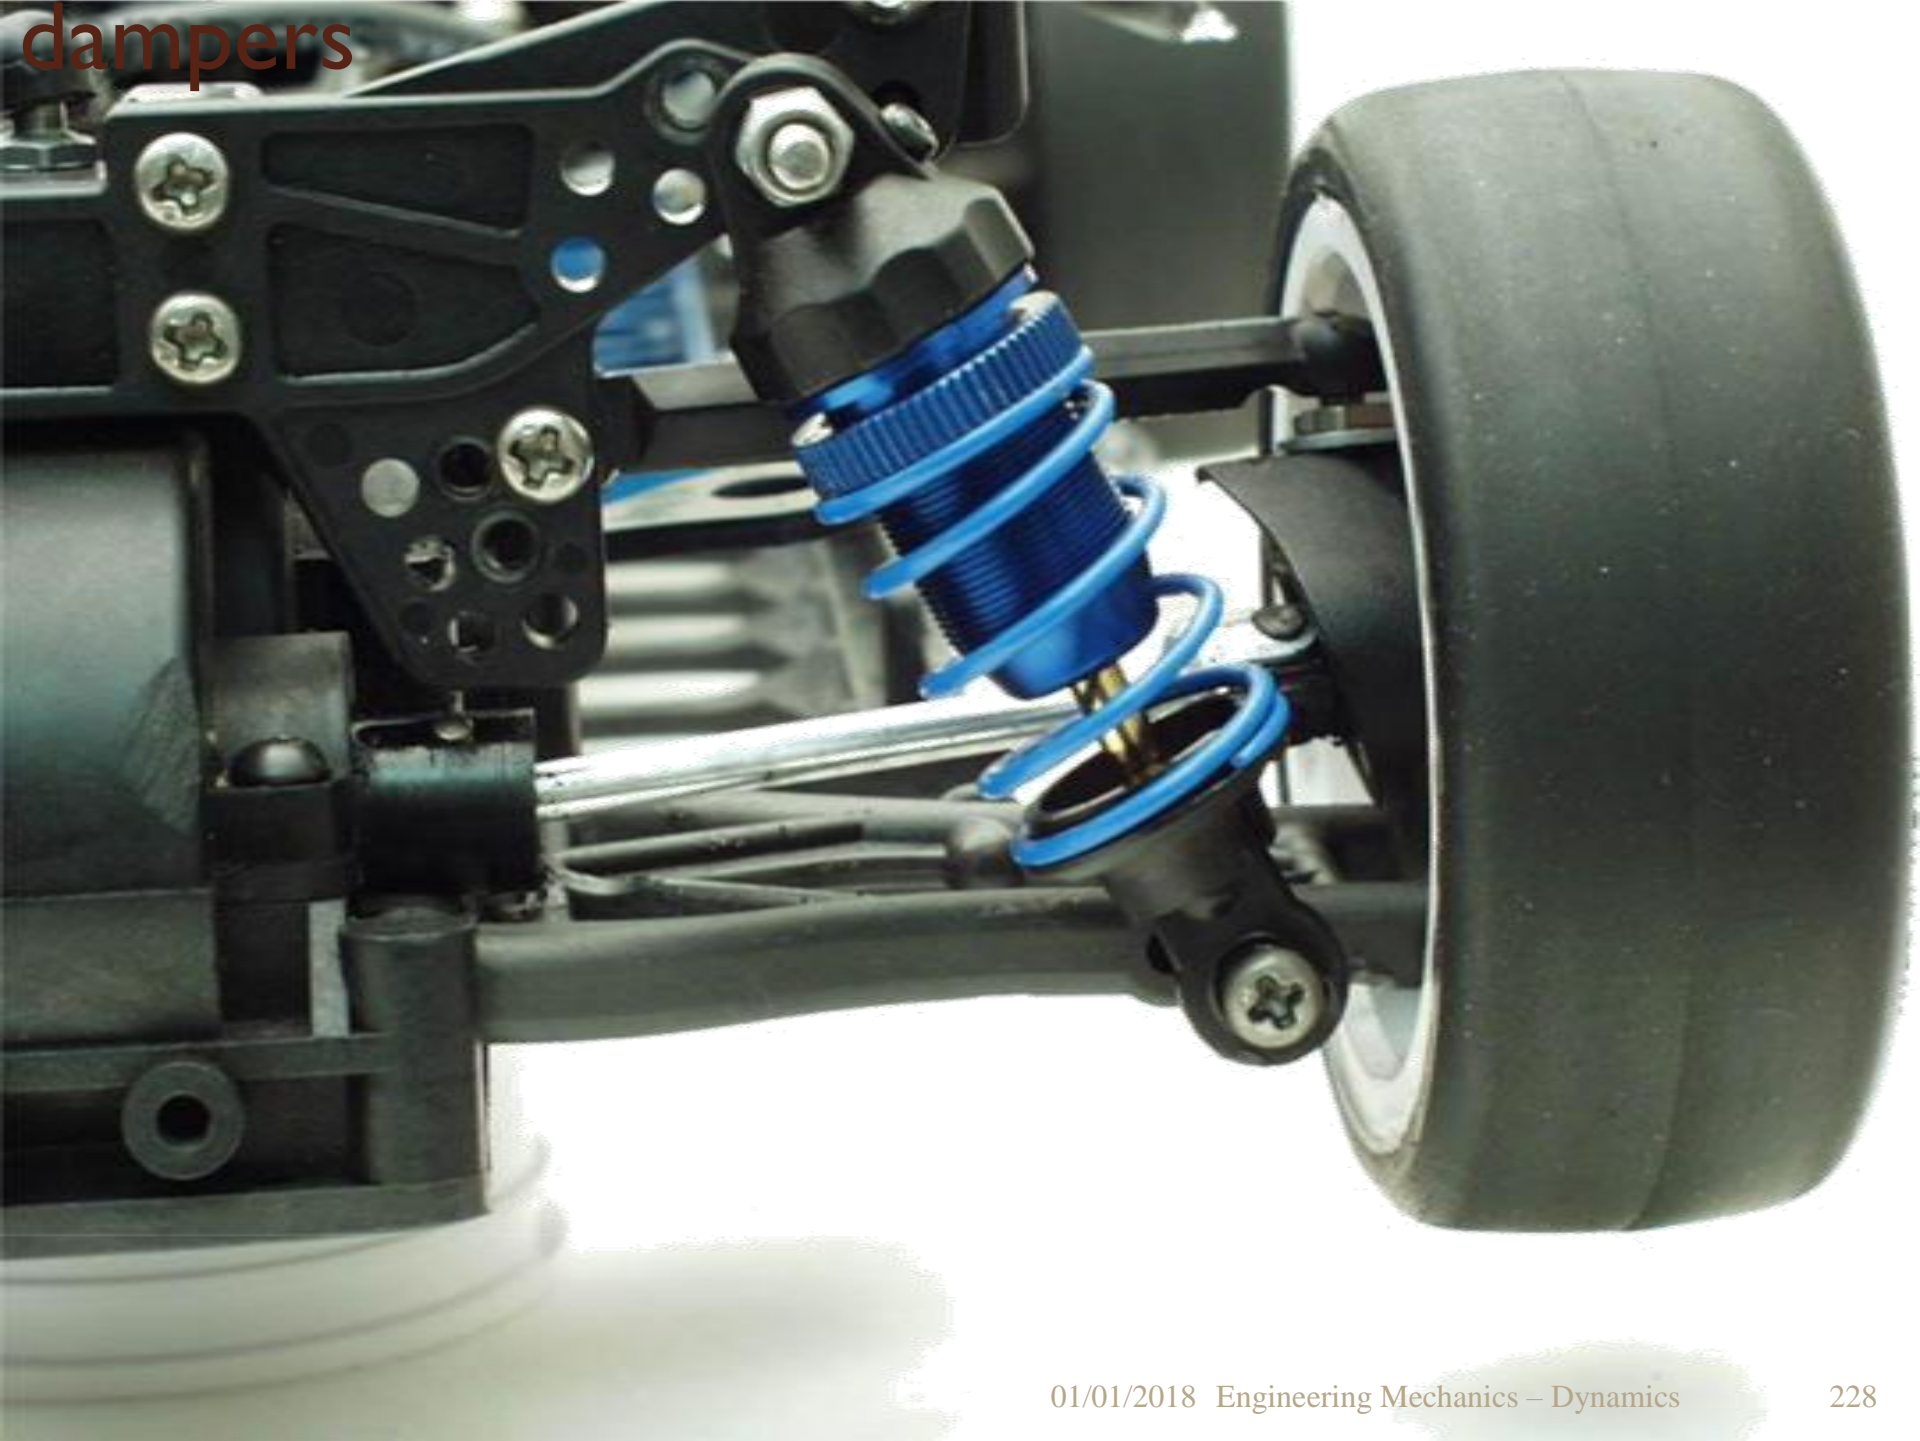



energy dissipation

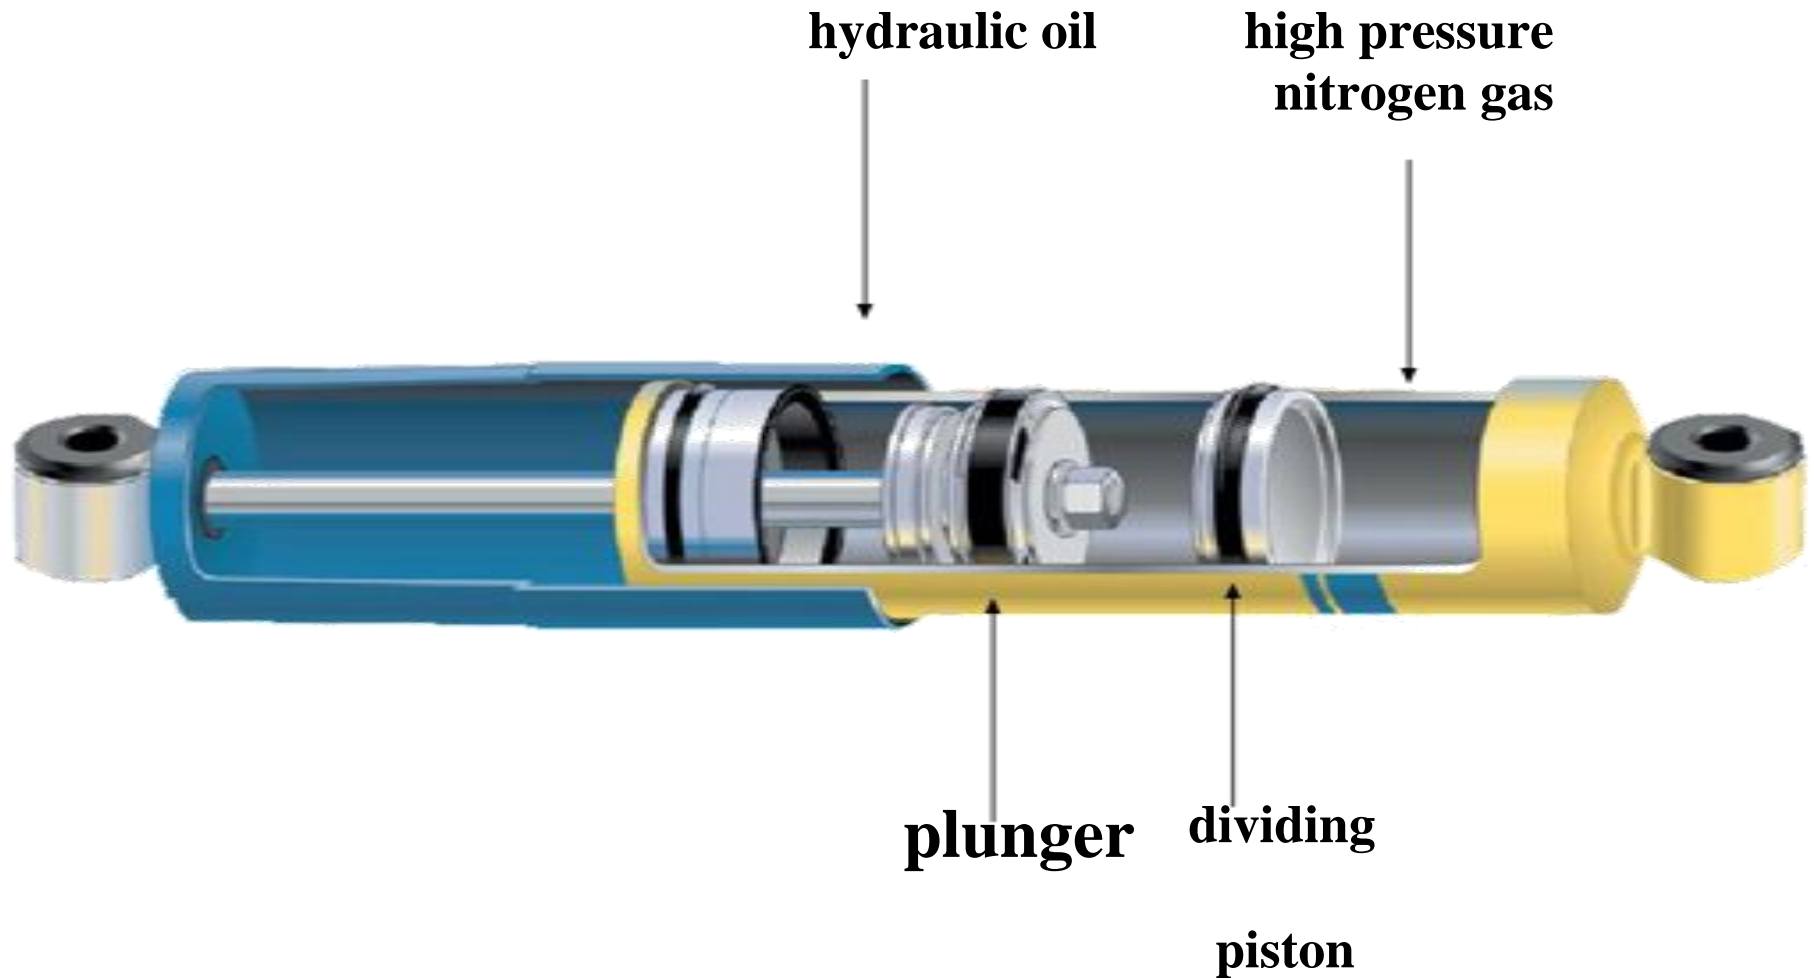

bridge dampers






Resonance

- Any elastic system has a **natural period** of oscillation.
- If bursts of energy (pushes) are supplied at the natural period, the **amplitude will increase.**
- This is called ***resonance***





Examples of resonance



- 
- The glass has a **natural frequency** of vibration.
 - If you tap the glass, it vibrates at the natural frequency causing sound.
 - If you put **energy** in at the natural frequency, the **amplitude** increases. This is **resonance**.
 - If the amplitude gets high enough, the glass can break.

Bay of Fundy

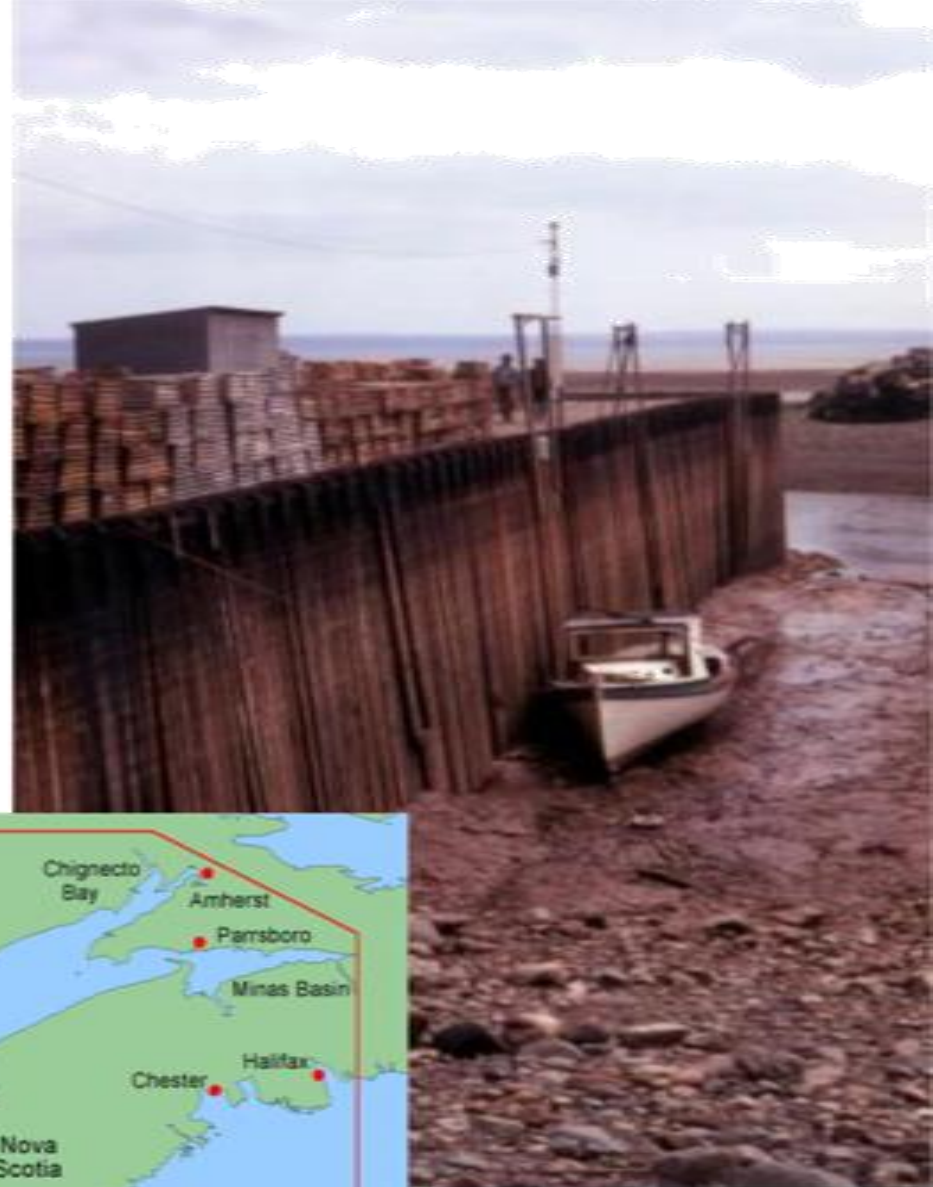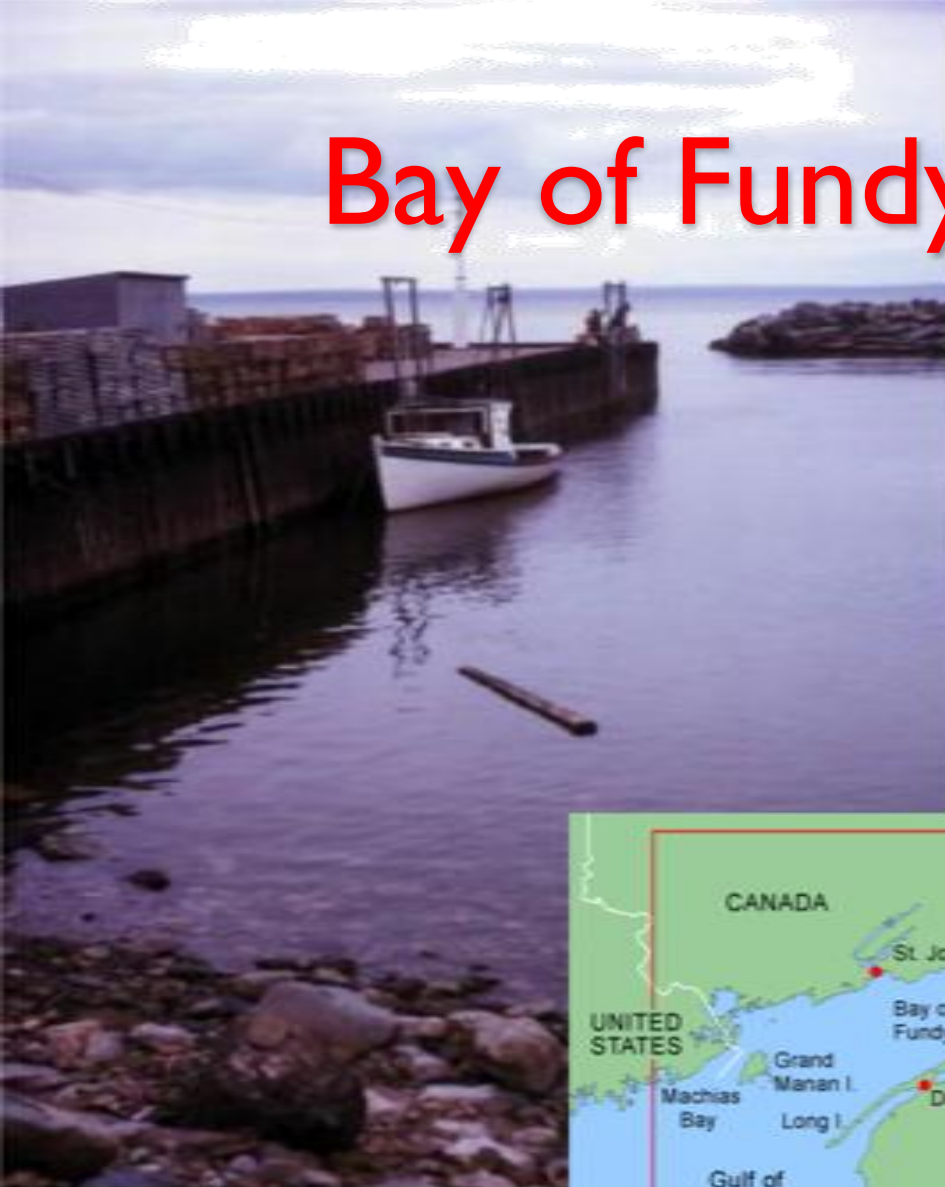

Bay of Fundy


The period of the tide is 12 hours.

The time for a wave to move up the bay and back is 12 hours



What is vibration?

- Vibrations are oscillations of a system about an equilibrium position.

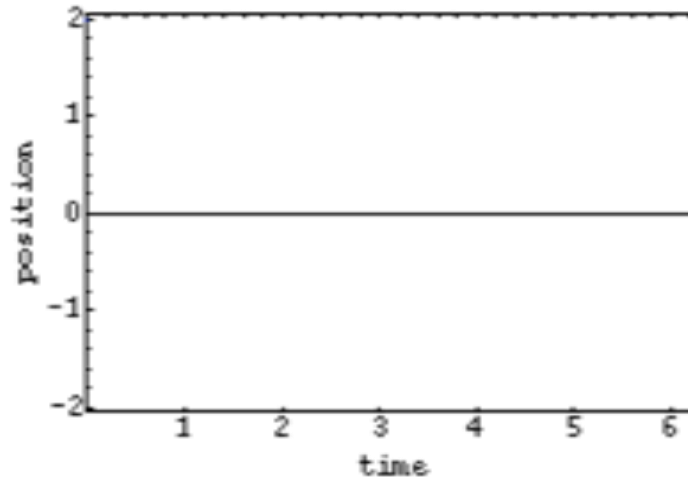

©1996 - V. Sparrow
modified by D. Russell, 1997

Vibration...



It is also an everyday phenomenon we meet on everyday life

Vibration ...


Useful Vibration



Compressor



Testing

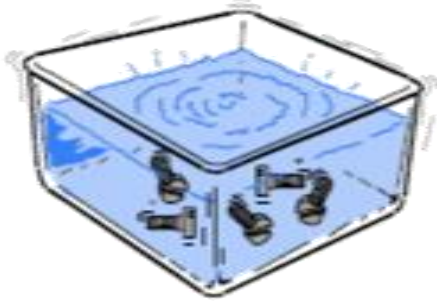


Ultrasonic
cleaning

Harmful vibration




Noise

Destruction




Wear

Fatigue



Vibration parameters

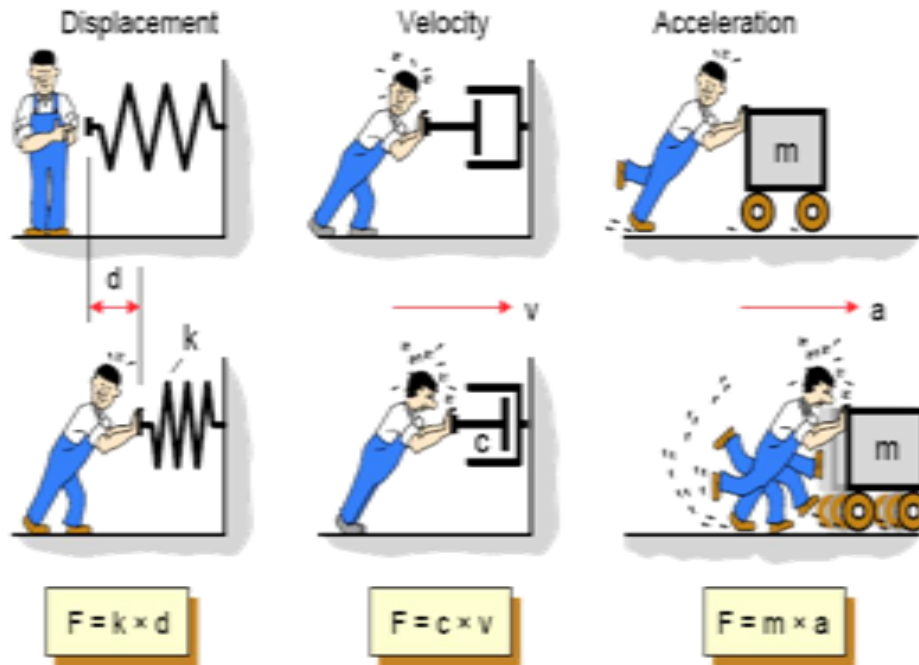

All mechanical systems can be modeled by containing three basic components:

spring, damper, mass



When these components are subjected to *constant* force, they react with a *constant*

displacement, velocity and acceleration


Free vibration

- When a system is initially disturbed by a displacement, velocity or acceleration, the system begins to vibrate with a constant amplitude and frequency depend on its stiffness and mass.
- This frequency is called as **natural frequency**, and the form of the vibration is called as **mode shapes**

Equilibrium pos.

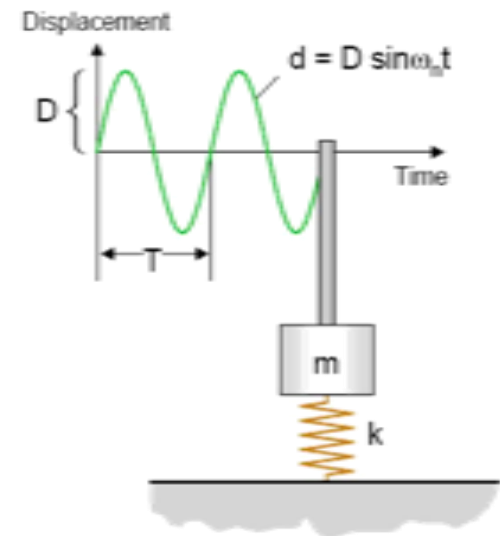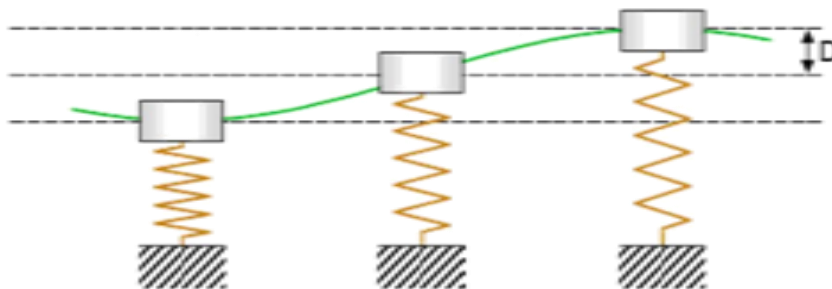


Forced Vibration



If an external force applied to a system, the system will follow the force with the same frequency.

However, when the force frequency is increased to the system's natural frequency, amplitudes will dangerously increase in this region. This phenomenon called as

“Resonance”

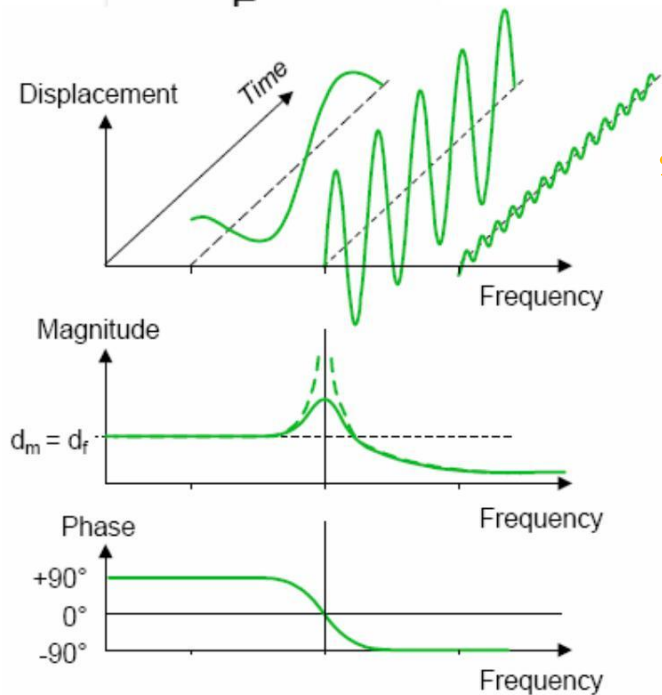



Watch these ...

Bridge collapse:

<http://www.youtube.com/watch?v=j-zczJXSxnw>

Helicopter resonance:

<http://www.youtube.com/watch?v=0FeXjhUEXlc>

Resonance vibration test:

http://www.youtube.com/watch?v=LV_UuzEznHs

Flutter (Aeordynamically induced vibration) :


<http://www.youtube.com/watch?v=OhwLojNerMU>

Modelling of vibrating systems


Lumped (Rigid) Modelling

Numerical Modelling


Single Degree of Freedom
SDOF



Element-based
methods
(FEM, BEM)



Multi Degree of Freedom
MDOF

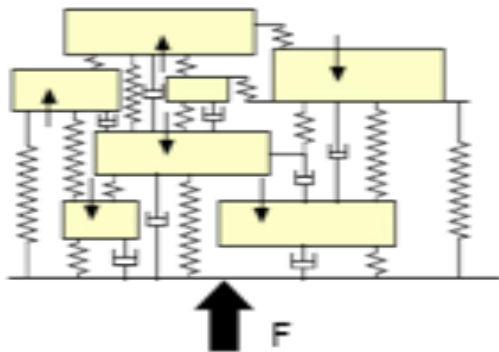

Statistical and Energy-
based methods
(SEA, EFA, etc.)




Degree of Freedom (DOF)

- Mathematical modeling of a physical system requires the selection of a set of variables that describes the behavior of the system.
- The number of *degrees of freedom* for a system is the number of kinematically independent variables necessary to completely describe the motion of every particle in the system


DOF=1

Single degree of freedom (SDOF)

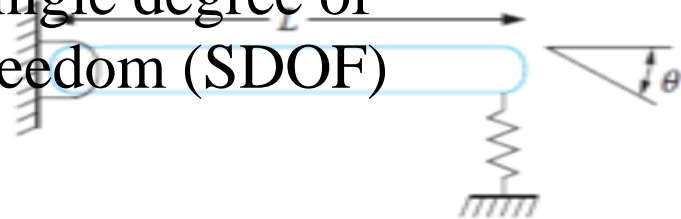

DOF=2


Multi degree of freedom (MDOF)

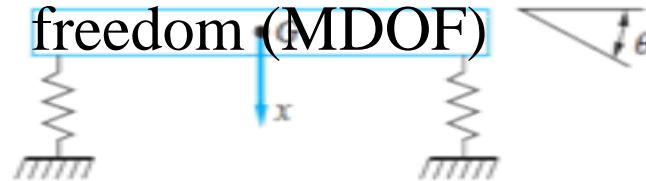

Equivalent model of systems

Example


1:

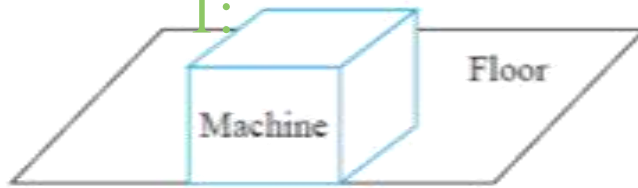

(a)

Example


2:

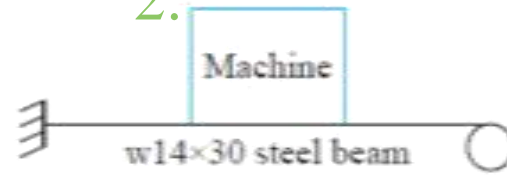

(b)

SDOF


DOF=1

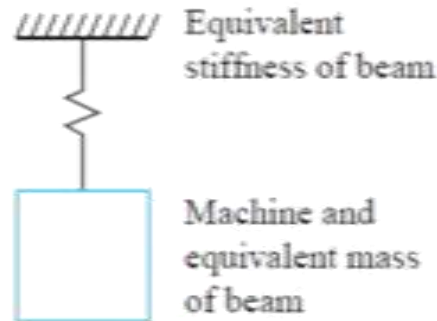

(c)

MDOF

DOF=2

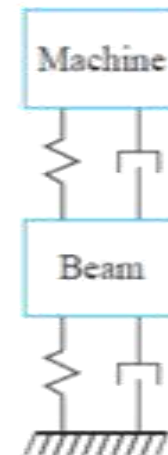

(d)

Equivalent model of systems

Example
3:


MDOF

DOF= 3 if body 1 has no



(a)

SDOF




(b)

DOF=2 rotation



(c)


DOF= 4 if body 1 has
rotation

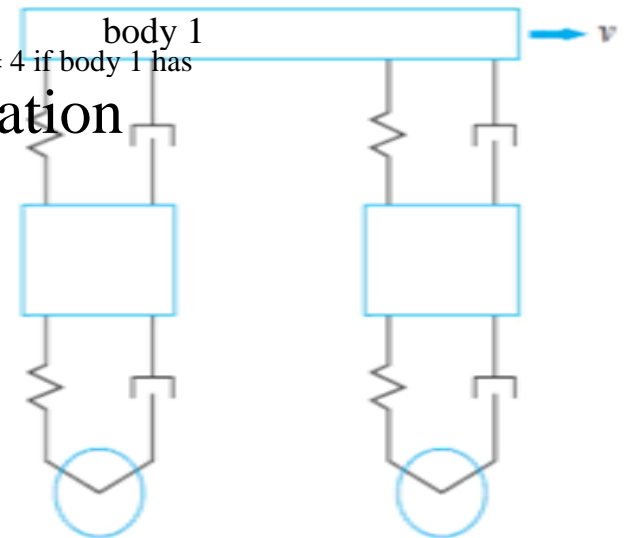

(d)

SDOF systems

Helical springs

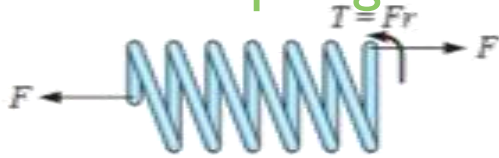

Shear stress:
Stiffness coefficient:


$$\tau_{\max} = \frac{FrD}{2J} = \frac{16Fr}{\pi D^3}$$

$$k = \frac{GD^4}{64Nr^3}$$

F : Force, D : Diameter, G : Shear modulus of the rod,
 N : Number of turns, r :

Radius ■ Springs in combinations:

Parallel combination

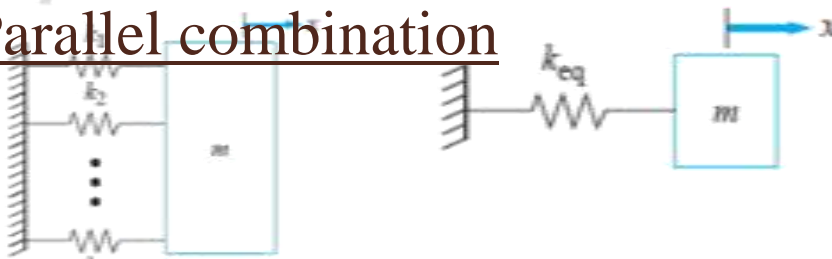

$$F = k_1x + k_2x + \cdots + k_nx = \left(\sum_{i=1}^n k_i \right) x$$

$$k_{\text{eq}} = \sum_{i=1}^n k_i$$






Series combination



$$x = x_1 + x_2 + \cdots + x_n = \sum_{i=1}^n x_i$$


$$x = \sum_{i=1}^n \frac{F}{k_i} \quad k_{\text{eq}} = \frac{1}{\sum_{i=1}^n \frac{1}{k_i}}$$

Elastic elements as springs

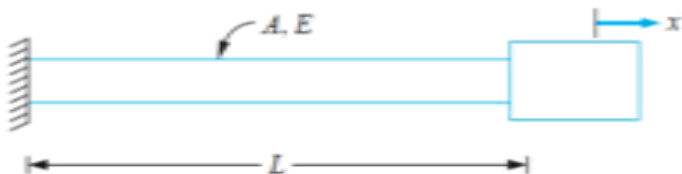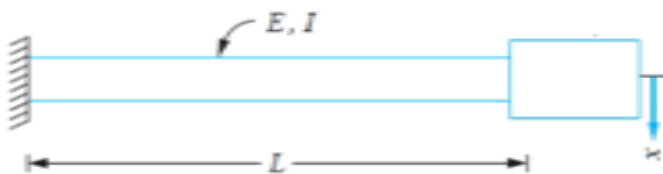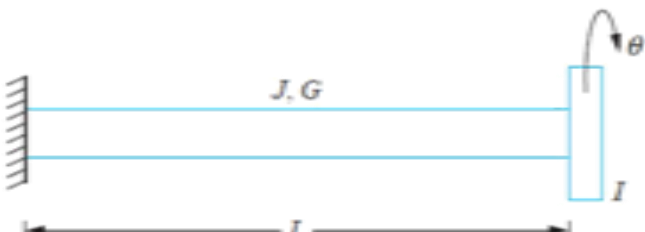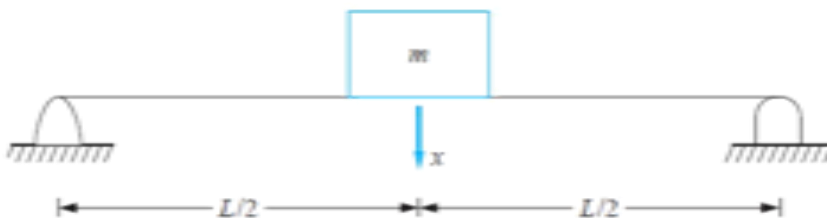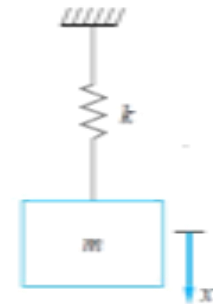System	Stiffness Coeff.	SDOF Model
	$k = \frac{AE}{L}$	
	$k = \frac{48EI}{L^3}$	
	$k = \frac{JG}{L}$	
	$k = \frac{3EI}{L^3}$	

Moment of Inertia

Slender rod

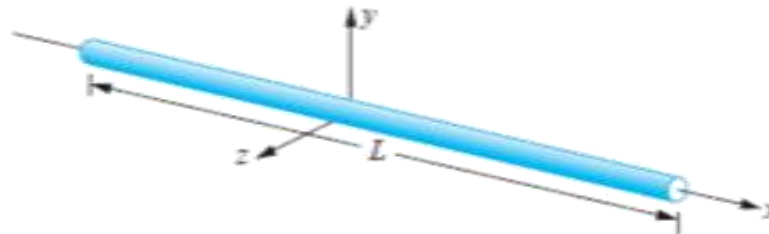


$$\bar{I}_x \approx 0$$

$$\bar{I}_y = \frac{1}{12}mL^2$$

$$\bar{I}_z = \frac{1}{12}mL^2$$

Thin disk



$$\bar{I}_x = \frac{1}{2}mr^2$$

$$\bar{I}_y = \frac{1}{4}mr^2$$

$$\bar{I}_z = \frac{1}{4}mr^2$$

What are the equivalent stiffnesses?

