



**INSTITUTE OF AERONAUTICAL ENGINEERING**  
Dundigal, Hyderabad - 500 043

**FRESHMAN ENGINEERING**

**ASSIGNMENT**

**Course Name** : **STRENGTH OF MATERIALS - II**  
**Course Code** : A40114  
**Class** : II-II - B. Tech  
**Branch** : CIVIL ENGINEERING  
**Year** : 2016 – 2017  
**Course** : Gude Ramakrishna  
**Coordinator**  
**Course Faculty** : Gude Ramakrishna

**OBJECTIVES**

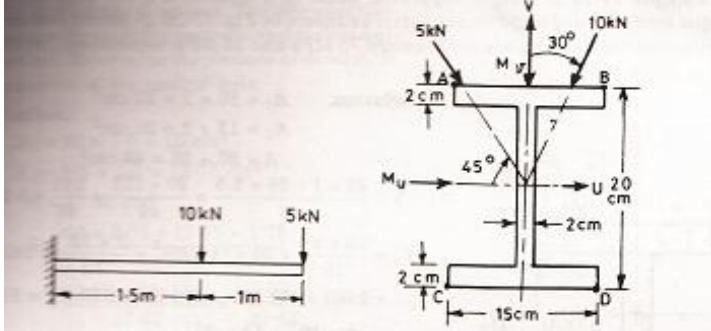
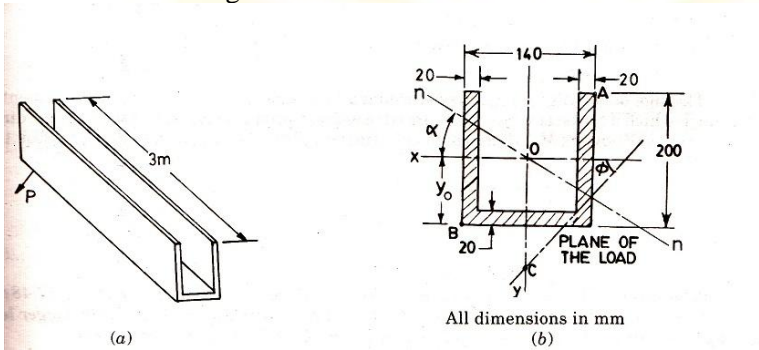
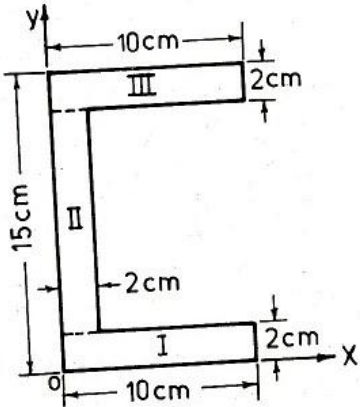
To impart adequate knowledge to find stresses in various structural parts used in buildings, dams, bridges, retaining walls and pressure in vessels, etc. To understand the failure phenomenon and to learn how to prevent the failure. To impart adequate knowledge to continue the design and research activity in structural analysis

S. No	Question	Blooms Taxonomy Level	Course Outcome
<b>ASSIGNMENT-I</b> <b>UNIT-I</b> <b>TORSION OF CIRCULAR SHAFTS &amp; SPRINGS</b>			
1.	Differentiate and explain types of springs.	Remembering & Understanding	a
2	a) Explain the theory of pure torsion with assumptions. b) Define solid length, spring rate, pitch	analyze	a
3	a) Define spring index (C). (1m) b) Derive the stiffness of springs with sketches when arranged in series & parallel.	creating	a
4	Derive expressions for polar modulus for a hollow circular shaft	Analyze	a
5	Derive expression for strain energy for a solid circular shaft	Apply	a
6	Calculate the maximum stress in a propeller shaft with a 400mm external and 200mm internal diameter, when subjected to a twisting moment of 4650Nm. If the modulus of rigidity, $C=82\text{GN/m}^2$ , how much is the twist in a length 20 times the diameter?	evaluate	a
7	A closed coil cylindrical spring of circular cross-section has coils with a 75mm mean diameter. When loaded with an axial load of 250N, it is	evaluate	a

S. No	Question	Blooms Taxonomy Level	Course Outcome
	found to extend 160mm and when subjected to a twisting couple of 3Nm, there is an angular rotation of 60 degrees. Determine the poissons ratio for the material.		
8	Determine the diameter of a solid steel shaft which will transmit 112.5kW at 200rpm. Also determine the length of the shaft if the twist must not exceed $1.5^0$ over the entire length. The maximum shear stress is limited to $55 \text{ N/mm}^2$ . Take $G = 8 \times 10^4 \text{ N/mm}^2$	understanding	a
9	The internal diameter of a hollow shaft is $2/3^{\text{rd}}$ of its external diameter. Compare its resistance to torsion with that of solid shaft of the same weight and material.	Apply	b
10	In a open coil helical spring having 10 coils, the stresses due to bending and twisting are 98MPa and 105MPa respectively, and the spring is axially loaded. Assuming the mean diameter of the coils to be 8 times the diameter of wire, find the maximum permissible load and the diameter of wire for a maximum extension of 2cm. $E=210\text{GPa}$ and $G=82\text{GPa}$ .	Analyze	a
<b>ASSIGNMENT – II</b>			
<b>UNIT-II</b>			
<b>CYBER AGE &amp; THREE DAYS TO SEE</b>			
1	Derive the equivalent length of a column for which both ends are fixed using Euler's theory.	Analyze	f
2	Derive the equivalent length of a column for which one end is fixed and other end is free using Euler's theory.	Understand	d
3	Derive Rankine's formula	Apply	e
4	Derive the maximum and minimum stresses developed in eccentrically loaded long columns	analyze	c
5	Derive the equation for maximum deflection and stresses for a uniformly loaded lateral strut.	analyze	d
6	A hollow circular steel strut with its ends position – fixed, has a length of 3m, external diameter of 0.4m and internal diameter 10cm. Before loading, the strut is bent with a maximum deviation of 0.4cm. Assuming the central line to be sinusoidal, determine (a) the maximum stress due to a central compressive end load of 8kN. (B) If the load has an eccentricity of 1.5cm, then find the maximum stress induced. Take $E = 200\text{GPa}$	understanding	c
7	A steel strut of circular cross-section 1.25m long is hinged at both ends. Find the necessary diameter in order that if a thrust of 50kN deviates at the end by $1/10^{\text{th}}$ of the diameter from the axis of the strut, the greatest compressive stress shall not exceed 35MPa. If the yield stress of steel 300MPa, find the crippling load. $E = 200\text{GPa}$	remembering	c
8	Determine the safe axial load a timber column of cross-sectional area 150mm X 150mm and of 4m length can carry using a factor of safety, 8. Take $E = 10\text{kN/mm}^2$ and for (a)hinged ends (b) fixed ends (c)one end free and other end fixed (d)one end hinged and other end fixed.	remembering	c
9	A steel column consists of two channels ISMC 300 X 35.8 kg/m placed back to back at a clear distance of 15cm and two plates of 350mm X 20mm are connected to the flanges. Find the crippling load	remembering	d

S. No	Question	Blooms Taxonomy Level	Course Outcome
	for the column if the distance between the hinged ends is 8m. Take $E = 210\text{kN/mm}^2$ . Properties of channel sections: Area of cross-section of each channel = $45.64\text{cm}^2$ $I_{xx} = 6362.6\text{ cm}^4$ $I_{yy} = 310.8\text{ cm}^4$ $C_{yy} = 2.36\text{ cm}$ Thickness of web = 7.6mm Thickness of flange = 13.6mm		
10	A steel strut of circular section is 2m long and hinged at both ends. Find the necessary diameter such that under a thrust of 100kN at an eccentricity of 0.1 of the diameter from the axis of the strut, the maximum compressive stress does not exceed $90\text{kN/mm}^2$ . If the yield stress in compression for steel is $400\text{N/mm}^2$ , find the crippling load of the strut.	apply	d
<b>UNIT-III</b> <b>RISK MANAGEMENT &amp; LEELA'S FRIEND</b>			
1	Derive the equation for maximum stress of a strut subjected to compressive axial load and a transverse point load at centre and whose both ends are pinned.	Evaluate	e
2	Derive the equation for maximum bending moment of a strut subjected to compressive axial load and a transverse point load at centre and whose both ends are fixed.	Analyze	e
3	Derive the equation for maximum deflection of a strut subjected to compressive axial load and a transverse point load at centre and whose both ends are fixed.	Evaluate	e
4	Derive the resultant stress when a column of rectangular cross-section is subjected to a load which is eccentric to both axes.	Remembering & Evaluate	f
5	Explain middle - third rule for rectangular sections	Understanding	f
6	A propeller shaft of 20cm external diameter and 15cm internal diameter has to transmit 1103.25kW at 100rpm. It is additionally subjected to a bending moment of 10kNm and an end thrust of 200kN. Find i) principal stresses and their planes and ii) maximum shear stress and its plane.	Evaluate	j
7	A brick chimney weighs 1600kN and has internal and external diameters at the base are 2m and 3m respectively. The chimney leans by $5^\circ$ with the vertical. Calculate the maximum stresses in the base. Assume that there is no wind pressure and C.G of chimney is 15m above the base.	Remembering & evaluate	j,m
8	Determine the maximum stress induced in a horizontal strut of length	Remembering	e

S. No	Question	Blooms Taxonomy Level	Course Outcome
	2.5m and of rectangular cross section 40mm wide and 80mm deep when it carries an axial thrust of 100kN and a vertical load of 6kN/m length. The strut is having pin joints at its ends. $E=208\text{GPa}$ .	& evaluate	
9	A masonry dam of rectangular section, 20m high and 10m wide, as water up to a height of 16m on its one side. Find a) Pressure force due to water and 1m length of dam b) Position of centre of pressure and the point at which the resultant cuts the base. Take weight density of masonry= $19.62\text{kN}/\text{m}^3$ and of water = $9.81\text{kN}/\text{m}^3$ . Calculate the maximum and minimum stress intensities at base of dam.	Understanding	f
10.	A masonry retaining wall of trapezoidal section is 12m high and retains earth which is level up to the top. The width at the top is 3m and at the bottom is 6m and exposed face is vertical. Find the maximum and minimum intensities of normal stress at the base. Take density of earth= $1600\text{kg}/\text{m}^3$ and density of masonry= $2300\text{kg}/\text{m}^3$ and angle of repose of earth= $30^\circ$	Evaluate	f
<b>ASSIGNMENT – III</b>			
<b>UNIT-1V</b>			
<b>HUMAN VAIUES AND PROFESSIONAL ETHICS &amp; THE LAST LEAF</b>			
1	Derive the equation for shear centre of channel section.	Understanding	g
2	Derive the resultant shear force, $F_R$ for equal leg angle section.	Evaluate	g
3	Derive the shear centre for channel section	Apply	g
4	Derive shear centre for unequal I-section	Understanding	g
5	Derive transformation laws for moment and product of inertia.	Analyze	g
6	A simply supported beam T-section, 2.5m long carries a central concentrated load inclined at $30^\circ$ to the Y-axis. If the maximum compressive and tensile stresses are not to exceed 75MPa respectively find the maximum load the beam can carry.	Apply	g
7	A standard I-beam is bent by equal and opposite couples $M$ acting at the ends of the beam in the plane m-m. Find the maximum stress and the maximum deflection. $I=2400\text{mm}^4$ , $I_v=150\text{cm}^4$ , $M=5\text{kNm}$ , $l=3\text{m}$ , $\phi=30^\circ$ , $E=200\text{GPa}$	Apply	g
8	A cantilever beam of I-section is used to support the loads inclined to the V- axis as shown in figure. Calculate the stresses at the corners A, B, C and D. Also locate the neutral axis.	Analyze	e,b

S. No	Question	Blooms Taxonomy Level	Course Outcome
			
9	<p>A cantilever beam has a channel section as shown in the figure. A concentrated load 15kN lies in the plane of the loads making an angle of <math>60^\circ</math> with the X-axis. Load, P lies in the plane of the cross section of the free end of the beam and passes through shear centre, C. Locate points of maximum tensile and compressive stresses in the beam and determine their magnitudes.</p>  <p>(a) (b)</p> <p>All dimensions in mm</p>	Understand	f
10	<p>A channel section is loaded as shown in the figure. Determine (a) the product of inertia with respect to x and y axes; (b) Shear centre.</p> 	Remember	b
<b>UNIT-V</b> <b>SPORTS AND HEALTH &amp; CONVOCATION SPEECH</b>			
1	Derive expression for longitudinal stress and maximum shear stress		h

S. No	Question	Blooms Taxonomy Level	Course Outcome
	developed in thin cylindrical vessel due to internal pressure.	Evaluate	
2	Derive circumferential strain and longitudinal strain for a thin cylindrical shell subjected to internal pressure	Evaluate	h
3	Derive the stresses developed in thick cylindrical vessel subjected to internal fluid pressure.	Analyze	h
4	What do you mean by thick compound cylinders? How will you determine the hoop stresses in a thick compound cylinder?	Apply	h
5	Derive an expression for the radial pressure and hoop stress for thick spherical shell.	Apply	h
6	A thick cylindrical pipe of outside diameter 300mm and thickness of metal 60mm is subjected to an internal fluid pressure of $40\text{N/mm}^2$ and an external pressure of $4\text{N/mm}^2$ . Calculate the maximum and minimum intensities of circumferential and radial stresses in the pipe section.	remembering	h
7	A compressed air cylinder for laboratory use ordinarily carries approximately $15\text{N/mm}^2$ pressure at the time of delivery. The outside diameter of such a cylinder is 250mm. If the steel has a yield point of $225\text{N/mm}^2$ and a safety factor of 25. Calculate the required wall thickness.	apply	h
8	A cast iron pipe having an internal diameter of 30cm has wall 6mm thick and is closely wound with a single layer of steel wire 3mm diameter under a stress of $8\text{MN/m}^2$ . Calculate the stresses in pipe and the wire when the internal pressure in the pipe is 1MPa.	remembering	h
9	A cylindrical steel vessel with hemispherical ends is 60cm long over all, the outside diameter is 10cm and the thickness 5mm throughout. Calculate the change in internal volume of the vessel when it is subjected to an internal pressure of 15MPa. $E=200\text{GPa}$ and $\nu = 0.28$	Apply	h
10	A copper tube of inside diameter 6cm and outside diameter 6.5cm is closely wound with steel wire of diameter 1mm. Find the tension at which the wire must be wound on the tube if a pressure of 1.5MPa is required before the copper is subjected to tensile stresses, the tube being free to expand or contract axially. For copper, $E_c=10\text{GPa}$ , $\nu=0.3$ , and for steel, $E_s=200\text{GPa}$	evaluate	h

Prepared By: Gude Ramakrishna